



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NOT RECOMMENDED FOR NEW DESIGNS,  
PLEASE USE PR3001G - PR3007G

### Features

- Low Reverse Recovery Time ( $T_{rr}$ )
- Low Reverse Current
- Low Forward Voltage Drop
- High Current Capability
- Plastic Material - UL Recognition 94V-0

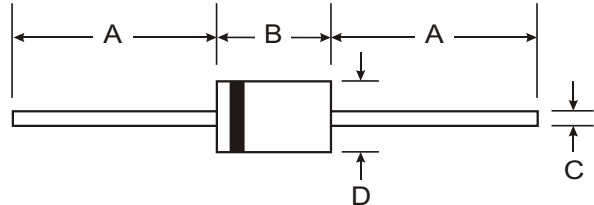

### Mechanical Data

- Case: DO-201AD, Molded Plastic
- Terminals: Axial Leads, Solderable per MIL-STD-202 Method 208
- Polarity: Color Band Denotes Cathode
- Approx. Weight: 1.1 grams
- Mounting Position: Any

DO-201AD		
Dim	Min	Max
A	25.4	—
B	7.2	9.5
C	1.2	1.3
D	4.8	5.3
All Dimensions in mm		

### Maximum Ratings and Electrical Characteristics

Ratings at 25° C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.

Characteristic	Symbol	FR 301	FR 302	FR 303	FR 304	FR 305	FR 306	FR 307	Unit
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current (9.5mm) Lead Length @ $T_A=75^\circ\text{C}$	$I_{(AV)}$	3.0							A
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	150							A
Maximum Instantaneous Forward Voltage at 3.0A DC	$V_F$	1.3							V
Maximum DC Reverse Current	$I_R$	10							$\mu\text{A}$
Maximum Reverse Recovery Time (Note 1)	$T_{rr}$	150				250	500		ns
Typical Junction Capacitance (Note 2)	$C_J$	70				50			pF
Operating and Storage Temperature Range	$T_J, T_{STG}$	-65 to +175							$^\circ\text{C}$

- Notes: 1. Reverse Recovery Test Conditions:  $I_F=0.5\text{ A}$ ,  $I_R=1.0\text{ A}$ ,  $I_{RR}=0.25\text{ A}$   
2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

