

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









ARM® Cortex®-M4 MCU family for BLDC, PMSM and ACIM motor control

Kinetis KV3x MCU Family

The Kinetis KV3x family of microcontrollers is a high-performance solution for BLDC, PMSM and ACIM motor control applications. Enabled with Kinetis Motor Suite.

TARGET APPLICATIONS

- ▶ BLDC motors
- ▶ PMSM motors
- ▶ ACIM motors

Built upon the Cortex-M4 core running at 100/120 MHz with DSP and floating point unit, it features dual 16-bit analog-to-digital converters (ADCs) sampling at up to 1.2 mega samples per second (MSPS), multiple motor control timers, 64 to 512 KB of flash memory and a comprehensive enablement suite from proprietary and third-party resources, including reference designs, software libraries and motor configuration tools.


The KV3x is the first device in the Kinetis portfolio to include Kinetis Motor Suite (KMS). KMS is a software solution that enables the rapid configuration of motor drive systems, and accelerates development of the final motor drive application, while improving overall motor system performance.

FEATURES AND BENEFITS

▶ 100/120 MHz Cortex-M4 core with DSP and floating point unit—improves performance in math-intensive applications (e.g., processing of sensorless FOC (field oriented control) algorithms)

- ▶ 2x 16-bit ADCs with two capture and hold circuits and up to 1.2 MSPS sample rate—simultaneous measurement of current and voltage phase, reduced jitter on input values improving system accuracy
- ▶ Up to 2 x 8-channel and 2 x 2-channel programmable FlexTimers—high-accuracy PWM generation with integrated power factor correction or speed sensor decoder (incremental decoder/hall sensor)
- ▶ Up to 2 x 12-bit DAC and 2 x ACPMs (analog comparators)—overcurrent and overvoltage fault detection, reduced BOM costs. ADC and ACMP interconnect with PWM and PDB (programmable delay blocks) for real-time hardware control
- ▶ 4- or 16-channel DMA—reduced CPU loading for improved application performance
- ▶ Dual watchdogs—compliance with IEC 60730 safety regulation requirements



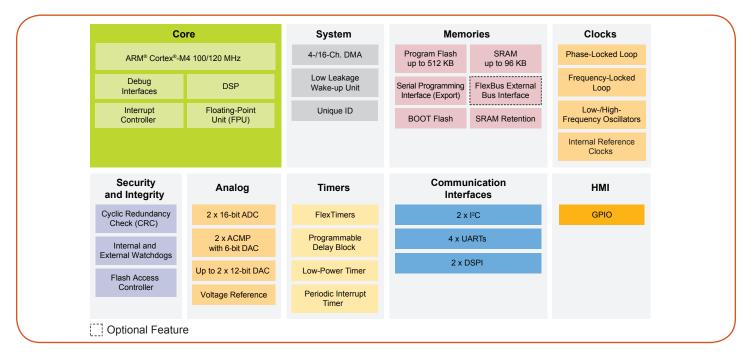

DEVELOPMENT TOOLS

Kinetis Motor Suite (KMS) is a software solution that enables the rapid configuration of motor drive systems, accelerates development of the final motor drive application whilst improving overall motor system performance due to its unique SpinTACTM enabled speed controller. Tuning and optimization is carried out via a simple graphical user interface that enables a developer to easily identify their motor, tune that motor using just one control dial and build a state machine to control the various speed transitions of the motor.

HVP-MC3PH

The platform enables development of three-phase PMSM, BLDC and ACIM motor control and power factor correction (PFC) solutions in a safe high-voltage environment.

Compatible with the HVP-KV31F120M controller card, input voltage is 85–240 V AC, with output power of the motor stage up to 1 KW and the ability to drive a 1.2 Hp motor.

FRDM-KV31F

An ultra-low-cost development platform for Kinetis KV3x MCUs. The

FRDM-KV31F hardware is form-factor compatible with the Arduino™ R3 pin layout, providing a broad range of expansion board options. Combine this with the FRDM-MC-LVPMSM or FRDM-MC-LVBLDC shields and the FRDM-MC-LVMTR to create a fully-enabled development platform for PMSM or BLDC motor control.

TWR-KV31F120M

The Tower System MCU module is a modular development platform that features the KV3x MCU in a 100 LQFP package, integrated OpenSDA debug adapter and is compatible with the TWR-MC-LV3PH three-phase motor peripheral module.

TWR-MC-LV3PH

The TWR-MC-LV3PH low-voltage, three-phase motor control Tower® System peripheral module provides a complete motor control reference design kit for developing BLDC and PMSM motor solutions, it includes a three-phase motor and motor drive circuitry.

Integrated Development Environment (IDE)

Kinetis KV3x MCUs are supported by Kinetis Design Studio, IAR Embedded

Workbench® for ARM and ARM Keil® Microcontroller Development Kit. All IDEs support the Processor Expert auto code generator.

Reference Designs Built on Embedded Motor Control Libraries

- Extensive suite of complimentary reference designs for ACIM, BLDC and PMSM motor control built on NXP's Embedded Software libraries and motor configuration tools.
- ▶ Complex real-time control applications
- ► Core self-test libraries for simpler IEC 60730 certification

FreeMASTER

FreeMASTER is a free and simple, yet highly customizable real-time debug monitor and data visualization tool that enables real-time data access.

Motor Control Toolbox

Motor control development toolbox is a comprehensive collection of tools that plug into MATLAB™/Simulink™ design environment to support rapid application development targeting Kinetis KV MCUs.

KINETIS KV3x MCU FAMILY

| PART NUMBER | MAX FREQ. (MHz) | PIN COUNT | PACKAGE | FLASH (KB) | SRAM (KB) | FLEX.BUS | DMA | PLL or FLL | FLEX TIMERS | DAC |
|-----------------|--------------------|--------------|---------|------------|-----------|----------|--------|------------|----------------------|-----|
| MKV31F512VLL12 | 120 | 100 | LQFP | 512 | 96 | YES | 16-ch. | PLL | 2 x 8-ch.; 2 x 2-ch. | 2 |
| MKV31F512VLH12 | 120 | 64 | LQFP | 512 | 96 | YES | 16-ch. | PLL | 2 x 8-ch.; 2 x 2-ch. | 2 |
| MKV31F512VLL12P | 120 | 100 | LQFP | 512 | 96 | YES | 16-ch. | PLL | 2 x 8-ch.; 2 x 2-ch. | 2 |
| MKV31F256VLL12 | 120 | 100 | LQFP | 256 | 48 | NO | 16-ch. | PLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV31F256VLH12 | 120 | 64 | LQFP | 256 | 48 | NO | 16-ch. | PLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV31F256VLH12P | 120 | 64 | LQFP | 256 | 48 | NO | 16-ch. | PLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV31F128VLL10 | 100 | 100 | LQFP | 128 | 24 | NO | 4-ch. | FLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV31F128VLH10 | 100 | 64 | LQFP | 128 | 24 | NO | 4-ch. | FLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV31F128VLH10P | 100 | 64 | LQFP | 128 | 24 | NO | 4-ch. | FLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV30F128VLH10 | 100 | 64 | LQFP | 128 | 16 | NO | 4-ch. | FLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV30F128VLF10 | 100 | 48 | LQFP | 128 | 16 | NO | 4-ch. | FLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV30F128VFM10 | 100 | 32 | QFN | 128 | 16 | NO | 4-ch. | FLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV30F128VLF10P | 100 | 48 | LQFP | 128 | 16 | NO | 4-ch. | FLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV30F64VLH10 | 100 | 64 | LQFP | 64 | 16 | NO | 4-ch. | FLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV30F64VLF10 | 100 | 48 | LQFP | 64 | 16 | NO | 4-ch. | FLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV30F64VFM10 | 100 | 32 | QFN | 64 | 16 | NO | 4-ch. | FLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV30F64VLH10P* | 100 | 64 | LQFP | 64 | 16 | NO | 4-ch. | FLL | 1 x 8-ch.; 2 x 2-ch. | 1 |
| MKV30F64VLF10P* | 100 | 48 | LQFP | 64 | 1 | NO | 4-ch. | FLL | 1 x 8-ch.; 2 x 2-ch. | 1 |

^{*} package your way