



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE		REEL QTY.	COLOR (DIN)	MAX. WIRE INSUL. DIA.	WIRE CLASS	DIMENSIONS - in [mm]				CP-881 INSERTS	CA10 DIE SET
	AWG	[mm ²]					L	P	OD (REF.)	ID		
* FSD75-8-5K10	22-20	[0,50]	5000	WHITE	.09 [2,4]	B, K, M	.57 [14,5]	.31 [8]	.05 [1,4]	.04 [1,0]	WHITE INSERTS	CD10-1
* FSD75-8-3K10	22-20	[0,50]	3000	WHITE	.09 [2,4]	B, K, M	.57 [14,5]	.31 [8]	.05 [1,4]	.04 [1,0]		
FSD76-8-5K8	18	[0,75]	5000	GRAY	.10 [2,6]	B, K, M	.57 [14,5]	.31 [8]	.06 [1,6]	.05 [1,2]	GRAY INSERTS	
FSD76-8-3K8	18	[0,75]	3000	GRAY	.10 [2,6]	B, K, M	.57 [14,5]	.31 [8]	.06 [1,6]	.05 [1,2]		
FSD77-8-5K2	-	[1,0]	5000	RED	.11 [2,8]	B, K, M	.57 [14,5]	.31 [8]	.07 [1,8]	.06 [1,4]	RED INSERTS	CD10-2
FSD77-8-3K2	-	[1,0]	3000	RED	.11 [2,8]	B, K, M	.57 [14,5]	.31 [8]	.07 [1,8]	.06 [1,4]		
FSD78-8-5K0	16	[1,5]	5000	BLACK	.13 [3,3]	B, K, M	.57 [14,5]	.31 [8]	.08 [2,1]	.07 [1,7]	BLACK INSERTS	
FSD78-8-2KD0	16	[1,5]	2500	BLACK	.13 [3,3]	B, K, M	.57 [14,5]	.31 [8]	.08 [2,1]	.07 [1,7]		
FSD80-8-3K6	14	[2,5]	3000	BLUE	.15 [3,9]	B, K, M	.57 [14,5]	.31 [8]	.10 [2,6]	.09 [2,2]	BLUE INSERTS	CD10-3
FSD80-8-KD6	14	[2,5]	1500	BLUE	.15 [3,9]	B, K, M	.57 [14,5]	.31 [8]	.10 [2,6]	.09 [2,2]		

* UL LISTED WITH 20 AWG ONLY, UL486F SCOPE IS 20 - 1/0 AWG. WHITE IS DIN COLOR FOR 20 AWG [0,5]

NOTES:

- USED FOR:
 - UL LISTED WITH STRANDED COPPER WIRE ONLY
 - 221°F [105°C] MAX. OPERATING TEMPERATURE
- INSTALLATION TOOLS PANDUIT APPROVED:
 - CP-871 WITH CA10 APPLICATOR
 - CP-881
- WIRE STRIP LENGTH: 13/32" ^{+1/32} ₋₀ [10,0^{+0,8} ₋₀]
- MATERIAL:
 - STAMPING: COPPER, TIN PLATED
 - HOUSING: POLYPROPYLENE, COLOR CODED
 - COLOR CODE CONFORMS TO DIN STANDARD
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- FOR TOLERANCING REFER TO DIN 46228 PART 4

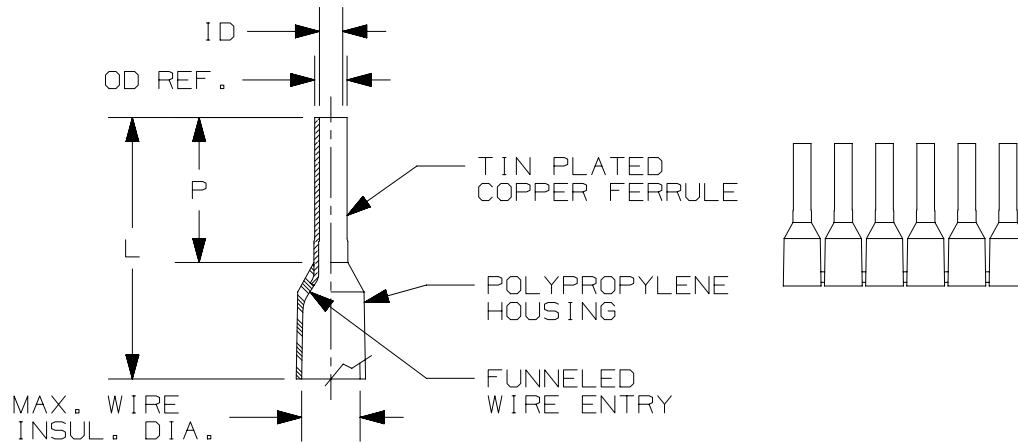

TITLE						
FERRULES WITH SLEEVES ON CONTINUOUS REEL (DIN)						
CUSTOMER DRAWING						
ITEM REVISION NAME					N41737BA/09	
DATASET FILE NAME					N41737BA_DC/09	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					MATERIAL:	
.X ±					.XXX ±	
.XX ±					ANGLES ±	
					THIRD ANGLE PROJECTION	
DRAWN BY					DATE	
DAW					1/07	
CHK					SCALE	
LCA					N.T.S.	
DRAWING NUMBER:					A41737	
REV					SHT 1 OF 1	
DATE					A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09	6/15	TMR	TMR	RGB	ADDED WIRE CLASSES TO TABLE	N41737BA-DC
08	3/15	JHNU	TMR	RGB	FSD76 WAS 20AWG, FSD77 WAS 18AWG	N41737BA-DC
07	12/14	JHNU	TMR	RGB	ADDED cULus LOGO REVISED NOTE 1A, ADDED NOTE 4C	N41737BA-DC
06	8/14	JHNU	JHNU	RGB	ADDED FSD75-8-3K10, FSD76-8-3K8, FSD77-8-3K2, FSD78-8-2KD0, FSD80-8-KD6	N41737BA-DC
05	4/14	JHNU	JHNU	RGB	UPDATED CP-881 TOOLING REVISED NOTE 2, REMOVED PKG. QTY. NOTE	N41737BA-DC

D10100DA/16