

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT	WIRE RANGE			COLOR	MAX. WIRE	WIRE	DIMENSIONS in. [mm]				CP-881	CA10 DIE	
PART #	AWG	[mm²]	QTY.	(DIN)	INSUL. DIA.	CLASS	L	Р	OD (REF.)	ID	INSERTS	SET	
* FSD73-8-K	24	[0,25]	1000	YELLOW	.08 [2,0]	B, K, M	.57 [14,5]	.31 [8,0]	.05 [1,3]	.03 [0,8]			
* FSD74-8-K	24-22	[0,34]	1000	TURQUOISE	.07 [1,9]	B, K, M	.57 [14,5]	.31 [8,0]	.05 [1,3]	.03 [0,8]			
+ FSD75-8-K	22-20	[0,50]	1000	WHITE	.09 [2,4]	B, K, M	.57 [14,5]	.31 [8,0]	.06 [1,4]	.04 [1,1]	WHITE INSERTS	CD10 1	
FSD76-8-K	18	[0,75]	1000	GRAY	.10 [2,6]	B, K, M	.57 [14,5]	.31 [8,0]	.06 [1,6]	.05 [1,3]	GRAY INSERTS	CD10-1	
FSD77-8-K	_	[1,0]	1000	RED	.11 [2,8]	B, K, M	.57 [14,5]	.31 [8,0]	.07 [1,8]	.06 [1,5]	RED INSERTS	0040 0	
FSD78-8-K	16	[1,5]	1000	BLACK	.13 [3,2]	B, K, M	.57 [14,5]	.31 [8,0]	.08 [2,1]	.07 [1,8]	BLACK INSERTS	CD10-2	
FSD80-8-DK	14	[2,5]	500	BLUE	.15 [3,9]	B, K, M	.57 [14,5]	.31 [8,0]	.10 [2,6]	.09 [2,3]	BLUE INSERTS	CD10-3	

* NOT UL LISTED, UL486F SCOPE IS 20 - 1/0 AWG. TURQUOISE IS DIN COLOR FOR 22 AWG [0,34]


+ UL LISTED WITH 20 AWG ONLY, WHITE IS DIN COLOR FOR 20 AWG [0,5]

NOTES:

- 1. USED FOR:
 - A. UL LISTED WITH STRANDED COPPER WIRE 20 1/0 AWG ONLY
 - B. 221°F (105°C) MAX. OPERATING TEMPERATURE
- 2. INSTALLATION TOOLS PANDUIT APPROVED:
 - A. CP-871 WITH CA10 APPLICATOR
 - B. CP-881
- 3. WIRE STRIP LENGTH: 13/32 +1/32 [10 +0,8]
- 4. MATERIAL:
 - A. STAMPING: COPPER, TIN PLATED
 - B. HOUSING: POLYPROPYLENE, COLOR CODED
 - C. COLOR CODE CONFORMS TO DIN STANDARD
- 5. SEE www.panduit.com FOR PACKAGE QUANTITIES
- 6. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- 7. PARTS CONFORM TO DIN 46228 PART 4

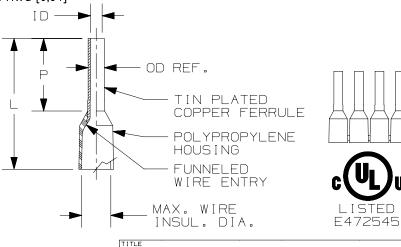

ITEM DEVICTOR NAME



LR31212

FERRULES WITH SLEEVES ON MINI REEL (DIN)

CUSTOMER DRAWING

								N41755BA/07				PANDUIT		
İ	07	6.05.15	TMR	TMR	RGB	ADDED WIRE CLASS TO TABLE	N41755BA-DC	DATASET FILE NAME N41755BA_DC/07						
Ì	06	03.06.15	JHNU	TMR	RGB	FSD76 WAS 20AWG, FSD77 WAS 18AWG	N41755BA-DC	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				MATERIAL:		
ĺ	05	12.05.14	JHNU	TMR	RGB	ADDED cULus LOGO REVSIED NOTE 1A, ADDED NOTE 4C	N41755BA-DC	.x ±		.XXX ± ANGLES ±		SEE NOTES		
!	04	02.18.13	BDK	вст	VMB	ADDED CSA LOGO; FSD77-8-K REMOVED 18 GAGE EXPANDED WIRE RANGE ON FSD74-8-K & FSD75-8-K	N41755BA-DC] {		THIRD ANGLE PROJECTION		DRAWING NUMBER: A41755		
;	REV	DATE	ВҮ	CHK	APR	DESCRIPTION	ECN	DRAWN BY	01.11	CHK	N.T.S.	SHEET 1 OF 1	SIZE	