

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE		COLOR	WIRE STRIP	MAX. WIRE	WIRE	DIMENSIONS in. [mm]				INSTALLATION
	AWG	[mm²]	(DIN)	LENGTH +1/32 -0 [+0,8 -0]	INSUL. DIA.	CLASS	L	Р	ID	OD (REF.)	TOOLS
FSDXL78-8	16	[1,5]	BLACK	15/32 [11,9]	0.27 [6,9]	B, K, M	0.69 [17,5]	0.31 [8,0]	0.07 [1,8]	0.08 [2,1]	
FSDXL78-10	16	[1,5]	BLACK	17/32 [13,5]	0.27 [6,9]	B, K, M	0.77 [19,5]	0.39 [10,0]	0.07 [1,8]	0.08 [2,1]	CT-1002
FSDXL80-8	14	[2,5]	BLUE	15/32 [11,9]	0.31 [7,8]	G, K, M	0.69 [17,5]	0.31 [8,0]	0.09 [2,3]	0.10 [2,6]	1
FSDXL80-12	14	[2,5]	BLUE	5/8 [15,9]	0.31 [7,8]	G, K, M	0.85 [21,5]	0.47 [12,0]	0.09 [2,3]	0.10 [2,6]	CT-1123
FSDXL81-10	12	[4,0]	GRAY	17/32 [13,5]	0.31 [7,8]	G, K, M	0.77 [19,5]	0.39 [10,0]	0.11 [2,9]	0.13 [3,3]	
FSDXL82-12	10	[6,0]	YELLOW	5/8 [15,9]	0.33 [8,3]	G, I, K, M	0.91 [23,0]	0.47 [12,0]	0.14 [3,6]	0.16 [4,0]	CT-1002, +CT-1003, CT-1123
FSDXL83-12	8	[10,0]	RED	5/8 [15,9]	0.39 [9,8]	G, H, I, K, M	0.94 [24,0]	0.47 [12,0]	0.18 [4,6]	0.20 [5,0]	+CT-1003, +CT-1004, CT-1104, CT-1123
FSDXL84-12	6	[16,0]	BLUE	5/8 [15,9]	0.47 [12,0]	G, H, I, K, M	1.00 [25,5]	0.47 [12,0]	0.24 [6,0]	0.25 [6,4]	+CT-1004, CT-1104

⁺ TOOL/PART IS NOT A UL LISTED COMBINATION

NOTES:

- 1. USED FOR:
 - A. UL LISTED WITH STRANDED COPPER WIRE ONLY
- B. 221°F [105°C] MAX. OPERATING TEMPERATURE
- 2. MATERIAL:
 - A. STAMPING: COPPER, TIN PLATED
 - B. HOUSING: POLYPROPYLENE, COLOR CODED
 - C. COLOR CODE CONFORMS TO DIN STANDARD
- 4. SEE www.panduit.com FOR PACKAGE QUANTITIES
- 5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

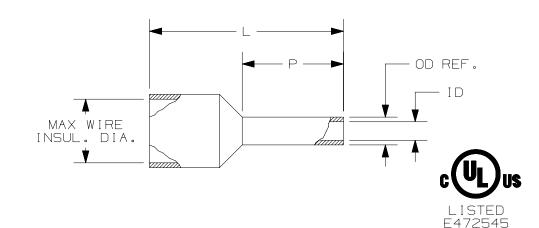



A								FERRULES WITH SHORT CIRCUIT PROTECTION SLEEVES FSDXL: SLEEVE HAS LARGER DIAMETER AND LENGTH
								CUSTOMER DRAWING ITEM REVISION NAME N41753BA/03 DATASET FILE NAME N41753BA_DC/03A
	04	6/15	JHNU	TMR	RGB	ADDED cULus LOGO AND WIRE CLASS, UPDATED TOOLS REVISED NOTE 1A, ADDED NOTE 2C	A41753	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] SEE NOTES
JA/12	03	01.09.13	BDK	вст		REVISED TITLE; REVISED NOTES; ADDED CSA LOGO; UPDATED DRAWING TO CURRENT STANDARDS	A41753	.xx: ANGLES: THIRD ANGLE PROJECTION A41753
010100	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	JKD - SKB N.T.S. SHEET 1 OF 1