



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





- Economical & Easy To Install
- Cut & Abrasion Resistant
- Extremely Flexible And Lightweight
- Flame Retardant
- Cuts With Shears
- Excellent EMI Shielding (1 MHz To 1 GHz)

Nominal Size	Part #	Wall Thickness	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/100'
			Min	Max				
*1/8"	FSN0.13SV	.013"	1/16"	1/4"	328'	164'	Silver	0.74
*3/8"	FSN0.38SV	.013"	1/4"	1/2"	328'	164'	Silver	1.38
*1/2"	FSN0.50SV	.013"	3/8"	3/4"	328'	164'	Silver	2.09
*3/4"	FSN0.75SV	.013"	1/2"	1"	328'	164'	Silver	2.80
1"	FSN1.00SV	.025"	3/4"	1 1/4"	328'	164'	Silver	2.90
1 1/4"	FSN1.25SV	.025"	1"	1 1/2"	328'	164'	Silver	3.40
1 1/2"	FSN1.50SV	.025"	1 1/4"	1 3/4"	328'	164'	Silver	3.90

* = VW-1 Sizes 1/8" - 3/4"

High Temperature Shielded Expandable Sleeving

Flexo Shield is a high performance EMI (Electromagnetic Interference) shielded, braided expandable sleeving. Flexo Shield is cut and abrasion resistant, flexible and lightweight. Our sleeving can help fulfill the requirements of the internationally recognized standard CISPR25 for frequencies ranging from 10 KHz to 1 GHz. It does this by assisting in the shielding of wires that are attached to these electronic components which require this rating. The material is also great for hose covering on hot rods and motorcycles.

With its high temperature aramid fiber cores and low angle braid, Flexo Shield can expand and contract to a limited degree to create a perfect fit. Flexo Shield braid fibers create a sleeve that provides good EMI protection and yields a material with out- standing flex-life.

Flexo Shield is great for applications where light weight and high performance are needed such as: computer systems, electronic office equipment, medical electronics, communication systems and many more. Techflex Flexo Shield is intended for high flex, high temperature, and environmentally tough applications, therefore making it appropriate for several aerospace applications.

Flexo Shield sleeving is used where light weight, high performance, high flex and high temperature are needed.



Cut Cleanly
Shears

Material

Aramid & Tinned Copper


Grade

FSN

Monofilament Diameter

.010"


Colors Available:
Silver (SV)

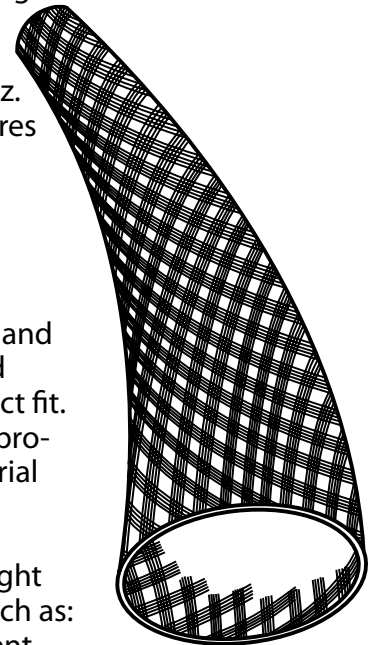

www.techflex.com

800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871



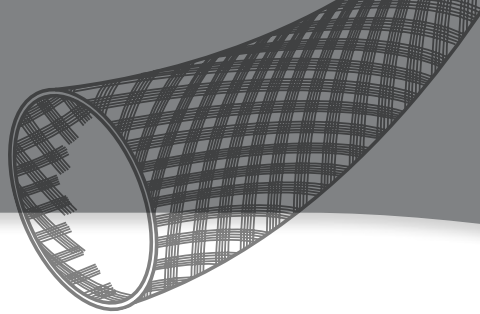

PHYSICAL PROPERTIES

Monofilament Diameter _____ 010
ASTM D-204

Flammability Rating _____ UL

Recommended Cutting _____ Shears

Colors _____ 1

Wall Thickness _____ .025

Abrasion _____ Low

Melt Point
ASTM D-2117

449°F (232°C)

Maximum Continuous
Mil-I-23053

302°F (150°C)

Minimum Continuous
-40°F (40°C)



CHEMICAL RESISTANCE

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____ 2

Aliphatic Solvents _____ 1

Chlorinated Solvents _____ 3

Weak Bases _____ 1

Salts _____ 1

Strong Bases _____ 2

Salt Water 0-S-1926 _____ 1

Hydraulic Fluid MIL-H-5606 _____ 1

Lube Oil MIL-L-7808 _____ 1

De-Icing Fluid MIL-A-8243 _____ 1

Strong Acids _____ 3

Strong Oxidants _____ 2

Esters/Ketones _____ 1

UV Light _____ 1

Petroleum _____ 1

Fungus ASTM G-21 _____ 1

RoHS _____ Yes



FLAMMABILITY

Rating _____ UL, VW-1

