imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FSV10AR Inline Flow Switch for G1"pipe





The FSV10AR can be used to control a pump or some other equipment or process via a relay output. If used in a pumped system, the device has to be fitted in the pipe above the pump.

The FSV10AR output relay is energised once the flow rate through the device exceeds 0.6 l/min, or 3 l/min depending on version.

The turn off time delay is adjustable between 0 and 10 seconds.


A flow of less than 0.6 l/min , or 3.0 l/min depending on version, whether due to a lack of supply (e.g. tank empty) or to a decrease in demand(e.g. tap closing), will release the output relay.

- General purpose switch for loads of up to 4A inductive
- 0.6 I/min or 3.0 I/min turn on flow rate
- Automatic shut down on flow stop
- Adjustable time delay from 0 to 10 seconds for pump stop
- 1"BSP inline pipe connections

Technical Specification			FSV10AR06		FSV10AR30
Flow Tube Material				Brass	
Enclosure material				Polyamide	
Enclosure rating				IP54	
Start up flow rate	Q. min	l/min	0.6		3.0
Max flow rate	Q max	l/min		80	
Max Pressure	P max	bar		8	
Max Temperature	T max	°C		85	
Pipe connections		BSP		1"	
Pump stop delay range		sec		0 - 10	

Electrical Specification			
Supply Voltage	Vac	24 or 240	
Switching Voltage Max	Vac	250	
Switching Power Max	kW	1	
Switching Current Max	А	10 for resistive load	
-		4A for motor load	

Standard Parts	On flow rate	Max Power	Max Pump current
FSV10AR06	0.61/min	750	4A
FSV10AR30	3.0 l/min	750	4A

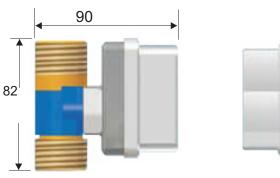



Cynergy3 Components Ltd. 7 Cobham Road Ferndown Industrial Estate Wimborne, Dorset BH21 7PE *Telephone +44 (0) 1202 897969*

Email:sales@cynergy3.com

ISO9001 CERTIFIED

www.cynergy3.com

FSV10AR Inline Flow Switch for G1"pipe



Installation information

The flow switch must be mounted vertically with the flow direction upwards. Pipe connection is G1" (1"BSP). The device relies on the flow of liquid working in opposition to gravity to operate the relay.

The liquid flow moves a plunger inside the brass flow tube, when the flow increases beyond the minimum specified level. A magnet inside the plunger closes a magnetic switch in the control circuit, so causing this to operate the output relay. If the flow drops below the specified level and the plunger has returned to the lower position, the output relay will remain energised for the time delay set and will then be deenrgised.

The output relay will also be energised for the time delay set, if the unit is disconnected then reconnected to the supply voltage or the test button is pushed.


The unit can operate on a supply voltage of either 24 or 240Vac.

The output is a SPCO electromechanical relay with contacts rated to 10A(4) A 250Vac.

There is a spare terminal connected to the 240Vac supply that can be used, if a 240Vac supply is being used, to link to the common contact of the relay, if a 240Vac output is required.

Flow Direction



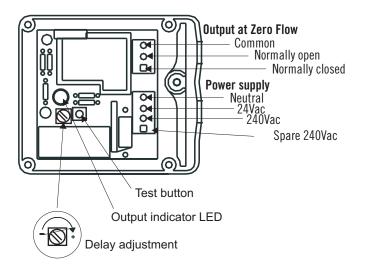

Cynergy3 Components Ltd. 7 Cobham Road Ferndown Industrial Estate Wimborne, Dorset BH21 7PE *Telephone +44 (0) 1202 897969*

Email:sales@cynergy3.com

ISO9001 CERTIFIED

www.cynergy3.com

© 2012 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.