

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







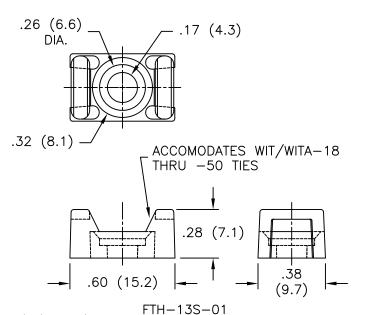

.17 (4.3)

.32 (8.1)

ACCOMODATES WIT/WITA-18
THRU -60 TIES

.28 (7.1)

.38 (9.7)

FTH-13R-01

NOTES:

1. MATERIAL: NYLON 6/6 (RMS-01), COLOR NATURAL.

2. FLAME RETARDANT NYLON (RMS-19). COLOR NATURAL. AVAILABLE BY SPECIAL ORDER ONLY; TO ORDER USE P/N FTH-13R-19 OR FTH-13S-19.

3. UV STABILIZED NYLON 6/6 (RMS-46), COLOR BLACK. AVAILABLE BY SPECIAL ORDER ONLY; TO ORDER USE P/N FTH-13R-UVB OR FTH-13S-UVB.

4. MOUNTING SCREW FOR FTH-13R: NO. 8 (M4) PAN HEAD, MOUNTING SCREW FOR FTH-13S: NO. 8 (M4) FLAT HEAD OR NO. 6 (M3.5) FLAT, ROUND, OR PAN HEAD.

 PACKAGING QUANTITIES ARE REFLECTED AS THE SUFFIX "-LETTER". EXAMPLE: FTH-13S-01-M FOR 1000 PCS.

-C = 100 PCS-M = 1000 PCS

MOUNTING RIVETS FOR - FTH-13R										
USE	HOLE DIA.	FOR PANEL								
RIVET NO.	LIOLE DIA.	THICKNESS RANGE								
SR-4050		.018058	(0.5-1.5)							
SR-4060		.058097	(1.5-2.5)							
SR-4070	.161 (4.1)	.097137	(2.5-3.5)							
SR-4080	, ,	.137176	(3.5 - 4.5)							
SR-4100		.215255	(5.5-6.5)							

			TITLE:		\triangle \top	TIF	$\sqcup \cap \sqcup$	DFR		<u>_</u> _ DWG_IN	
F	ADDED NOTE 5. SEE CO 200661	SK 05.12.11			_/_ \	I I L			19 -	(MM) N	
E	SEE CO 200570 FOR CHANGES	SK 08.04.10	TOLERANCES	FILE #	FTH-13X		DWN: E.P.	APP:		FINAL	
D	SEE ECN #1124 FOR CHANGES	SK 01.24.06	UNLESS NOTED	MAT'L:	SEE NOTES	3	DT: 12-30-	98 DT:	PART #		PRINT
С	UPDATED PRINT AND CHANGED FILE NO.	SM 05.20.02	$.XX = \pm .010$		OLL HOTE				┨╵╱ѷѷ҅゜‴		
В	REDRAWN TO INCLUDE FTH-13S-01 DWG.	RG11/02/00		RE:	RICHCO,	INC.	RICH		IFTH-13	SERIES	TYPE
Α	FR NYLON 66 (RMS-19) ADDED	JL 01.06.00	FRAC=±1/64		,			238,CHICAGO,60680		SLINES	$ \cap \wedge $
REV	DESCRIPTION	ENGR DATE	ANG=±1°				(773)	539-4060			$ \cup \wedge $