



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China


Standard Rectifier

3~ Rectifier	
V_{RRM}	= 1600 V
I_{DAV}	= 50 A
I_{FSM}	= 270 A

3~ Rectifier Bridge


Part number

FUO50-16N



Backside: isolated

E72873

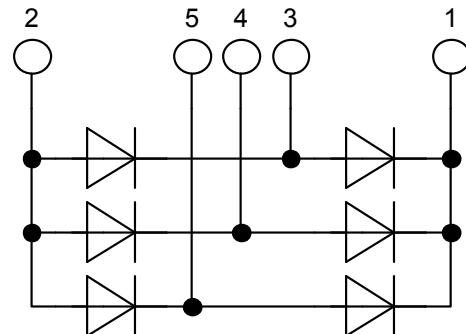

Features / Advantages:

- Package with DCB ceramic
- Reduced weight
- Improved temperature and power cycling
- Planar passivated chips
- Very low forward voltage drop
- Very low leakage current

Applications:

- Diode for main rectification
- For single and three phase bridge configurations

Package: i4-Pac


- Isolation Voltage: 3000 V~
- Industry convenient outline
- RoHS compliant
- Epoxy meets UL 94V-0
- Soldering pins for PCB mounting
- Backside: DCB ceramic
- Reduced weight
- Advanced power cycling

Rectifier

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			1700	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			1600	V
I_R	reverse current, drain current	$V_R = 1600 V$ $V_R = 1600 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 150^\circ C$		20 1	μA mA
V_F	forward voltage drop	$I_F = 15 A$ $I_F = 45 A$ $I_F = 15 A$ $I_F = 45 A$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 150^\circ C$		1.15 1.50 1.04 1.55	V V
I_{DAV}	bridge output current	$T_C = 120^\circ C$ rectangular $d = \frac{1}{3}$	$T_{VJ} = 175^\circ C$		50	A
V_{FO} r_F	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 175^\circ C$		0.78 17	V $m\Omega$
R_{thJC}	thermal resistance junction to case				2.1	K/W
R_{thCH}	thermal resistance case to heatsink			0.20		K/W
P_{tot}	total power dissipation		$T_C = 25^\circ C$		70	W
I_{FSM}	max. forward surge current	$t = 10 ms; (50 Hz)$, sine $t = 8,3 ms; (60 Hz)$, sine	$T_{VJ} = 45^\circ C$ $V_R = 0 V$		270 290	A
		$t = 10 ms; (50 Hz)$, sine $t = 8,3 ms; (60 Hz)$, sine	$T_{VJ} = 150^\circ C$ $V_R = 0 V$		230 250	A
I^2t	value for fusing	$t = 10 ms; (50 Hz)$, sine $t = 8,3 ms; (60 Hz)$, sine	$T_{VJ} = 45^\circ C$ $V_R = 0 V$		365 350	A^2s
		$t = 10 ms; (50 Hz)$, sine $t = 8,3 ms; (60 Hz)$, sine	$T_{VJ} = 150^\circ C$ $V_R = 0 V$		265 260	A^2s
C_J	junction capacitance	$V_R = 400 V; f = 1 MHz$	$T_{VJ} = 25^\circ C$		8	pF

Package i4-Pac			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			50	A
T_{stg}	storage temperature		-55		150	°C
T_{VJ}	virtual junction temperature		-55		175	°C
Weight				9		g
F_c	mounting force with clip		20		120	N
$d_{Spp/App}$	creepage distance on surface / striking distance through air	terminal to terminal	1.7			mm
$d_{Spb/Apb}$		terminal to backside	5.1			mm
V_{ISOL}	isolation voltage	t = 1 second t = 1 minute	3000 50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	2500		V


Product Marking



Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	FUO50-16N	FUO50-16N	Tube	25	498637


Equivalent Circuits for Simulation

* on die level

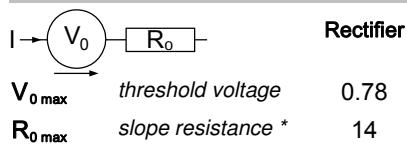 $T_{VJ} = 175$ °C


$V_{0\max}$ threshold voltage 0.78 V
 $R_{0\max}$ slope resistance * 14 mΩ

Outlines i4-Pac

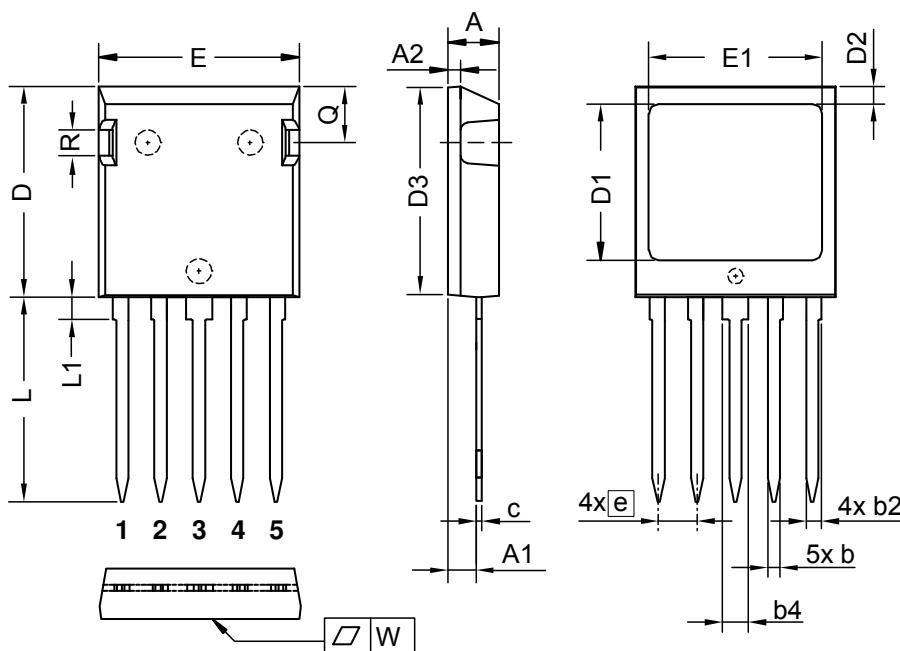

Dim.	Millimeter		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
b4	2.54	2.79	0.100	0.110
c	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
D3	20.30	20.70	0.799	0.815
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	3.81	BSC	0.150	BSC
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	-	0.10	-	0.004

Die konvexe Form des Substrates ist typ. < 0.05 mm über der Kunststoffoberfläche der Bauteilunterseite
The convex bow of substrate is typ. < 0.05 mm over plastic surface level of device bottom side

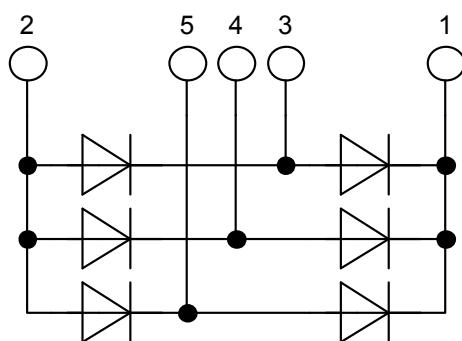

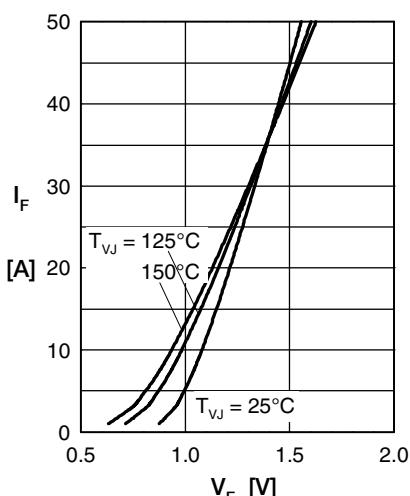
Rectifier

Fig. 1 Forward current versus voltage drop per diode

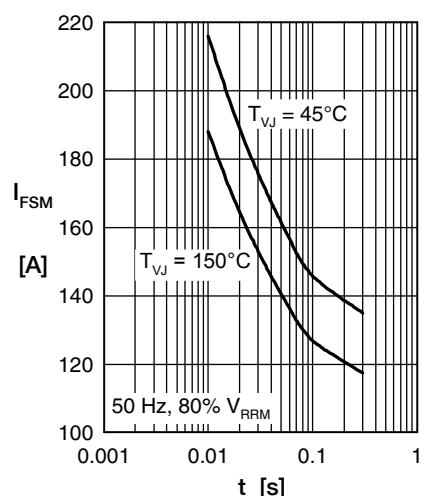


Fig. 2 Surge overload current

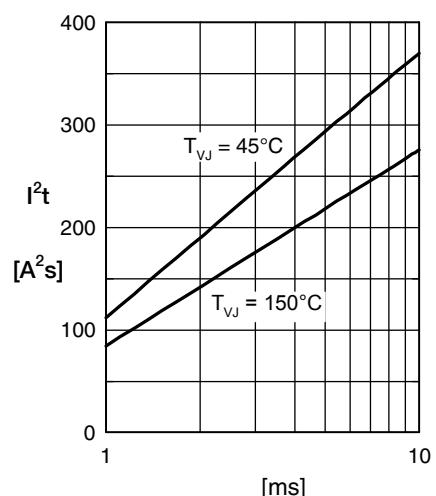
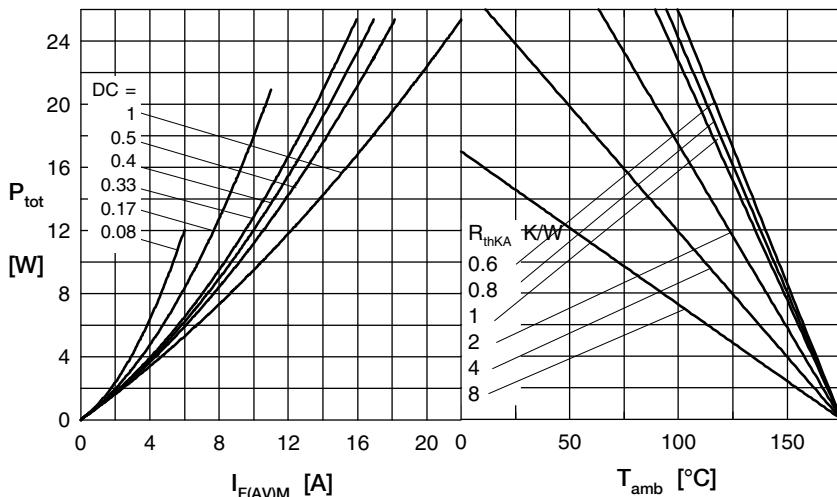
Fig. 3 I^2t versus time per diode

Fig. 4 Power dissipation vs. direct output current & ambient temperature

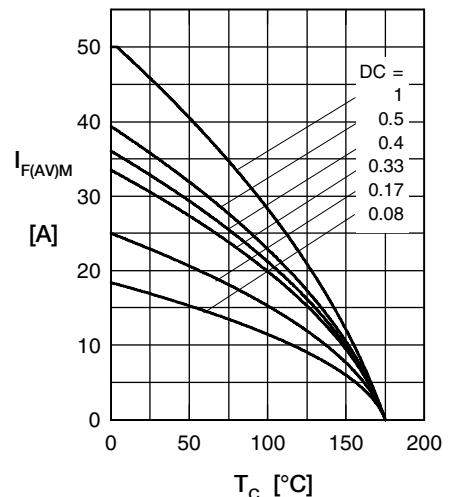


Fig. 5 Max. forward current vs. case temperature

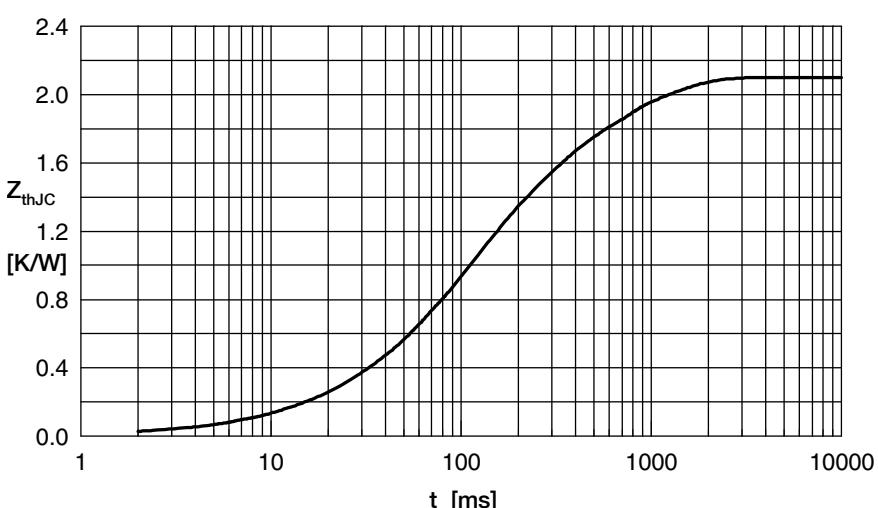


Fig. 6 Transient thermal impedance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	1.159	0.1015
2	0.1286	0.1026
3	0.2651	0.4919
4	0.5473	0.62