



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features:

1310/CWDM MUX/DEMUX (type II) Plug-in Module



- Low optical insertion loss
- Cost-effective WDM technology
- Terminates 1310 and four or eight CWDM wavelengths
- LC connectors (SC version available)
- Color coded for easy installation
- Reliable passive WDM technology
- Ring or point-to-point applications
- Low-profile modular design
- Fits in 1RU 19" rack mount chassis
- RoHS compliant

1310/CWDM plug-in module is a passive optical multiplexer/demultiplexer designed to add CWDM wavelengths to an existing 1310nm backbone ring. The module multiplexes and demultiplexes a single 1310nm wavelength and four or eight additional CWDM wavelengths in a two-fiber ring network.

This MUX/DEMUX module plugs into one half of a 1RU, 19" rack mount chassis for simple installation and modularity. This Chassis based system offers network equipment manufacturers a more scalable and higher-density solution to add CWDM capability to their existing and new networks with simple pluggable interface.

Finisar's CWDM product delivers dramatic cost savings to network equipment manufacturers, enabling them to develop metro access systems that are lower in cost, easier to provision and simpler to operate.

1310/CWDM MUX/DEMUX (Type II) Plug-in Module

Specifications

Mechanical

Dimensions:

8.3" x 1.7" x 10.4",
210mm x 43mm x 264mm,
plug-in for 1RU rack-mount

Connectors:

- Network side: LC/PC or LC/APC
- Equipment side: LC/PC or LC/APC

Optical

Wavelengths Ports:

MUX/DEMUX-1310/CWDM-4 Plug-in

- 1310nm
- 1471nm
- 1511nm
- 1551nm
- 1591nm

MUX/DEMUX-1310/CWDM-8 Plug-in

- 1310nm
- 1471nm • 1491nm
- 1511nm • 1531nm
- 1551nm • 1571nm
- 1591nm • 1611nm

Directivity:

≥ 55dB

Return Loss:

≥ 45dB

PDL:

≤ 0.15dB

PMD:

≤ 0.2ps

Environmental:

- Operating 0 to 70°C
- Relative humidity:
10 to 85%, non-condensing
- Storage - 40 to 85°C

1310/CWDM MUX/DEMUX (type II) Plug-in Module Parameter Specifications

FWSF-M/D-1310/CWDM-4


Channel	Passband	Max Insertion Loss (dB)		Min Isolation (dB)	
		Mux	Demux	Mux	Demux
1310 channel	1260nm-1360nm	1.1	1.1	30	45
CWDM channels	CWL+/-6.5nm	2.4	2.7	30	45

FWSF-M/D-1310/CWDM-8


Channel	Passband	Max Insertion Loss (dB)		Min Isolation (dB)	
		Mux	Demux	Mux	Demux
1310 channel	1260nm-1360nm	1.1	1.1	30	45
CWDM channels	CWL+/-6.5nm	3.2	3.5	30	45

Note: Connector loss included

Front Panel

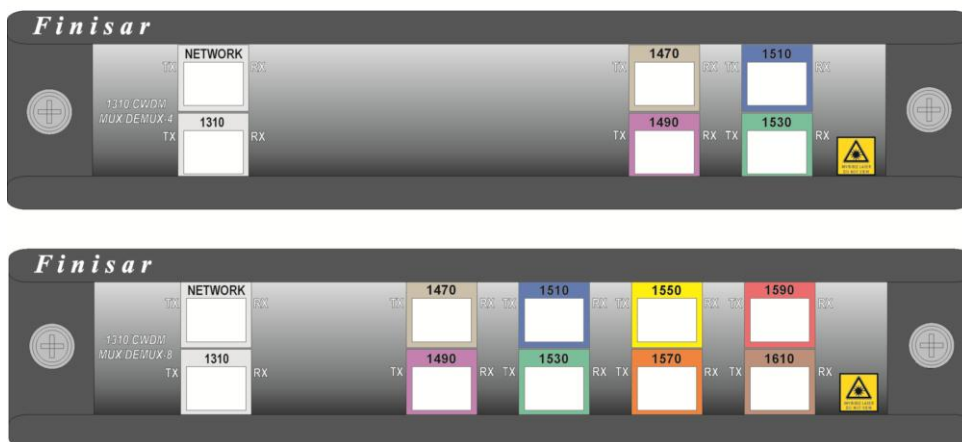

Dimensions (Unit: inch)

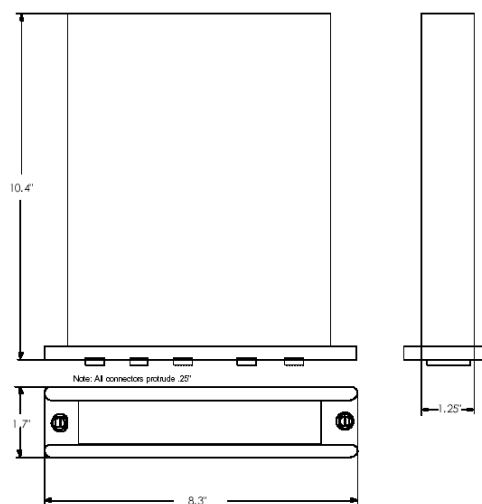

Ordering Information

Part Number Description

FWSF-M/D-1310/CWDM-4-LC	Four Wavelength Plug-in Module for FWSF-CHASSIS-2, 1471nm, 1511nm, 1551nm, 1591nm, LC/PC connectors
FWSF-M/D-1310/CWDM-4-LA	Four Wavelength Plug-in Module for FWSF-CHASSIS-2, 1471nm, 1511nm, 1551nm, 1591nm, LC/APC connectors
FWSF-M/D-1310/CWDM-8-LC	Eight Wavelength Plug-in Module for FWSF-CHASSIS-2, 1471nm to 1611nm, LC/PC connectors
FWSF-M/D-1310/CWDM-8-LA	Eight Wavelength Plug-in Module for FWSF-CHASSIS-2, 1471nm to 1611nm, LC/APC connectors