



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ISODAMP™ C-6000 Series Materials

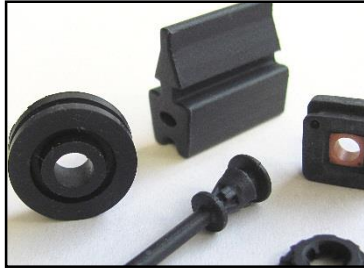

- ISODAMP C-6000 series is a highly damped thermoplastic vulcanizate, or TPV. It is available in 3 durometers in parts and assemblies
- ISODAMP C-6000 Isolator parts and assemblies are used to enhance performance and protect electronic and mechanical devices from shock, vibration and noise.
- ISODAMP C-6000 series parts are Halogen-free (per IEC 61249-2-21), complies with REACH substances of very high concern free (as of June 2015), meets JIG -101 and is RoHS 2 compliant

Typical Properties	C-6040	C-6050	C-6060
Hardness, ASTM D2240 (Type A, 15 sec, 1 kg, 23C (72F))	40	50	60
Compression Force Deflection kPa (psi) ASTM D575 @ 0.51cm/min (0.2 in/min)			
10%	270 (39)	410 (59)	580 (84)
20%	500 (73)	750 (110)	1100 (150)
30%	800 (120)	1200 (170)	1600 (240)
Compression Set ASTM D395, Method B			
25% @ 22C (72F)	20%	20%	25%
25% @ 70C (158F)	50%	50%	50%
Abrasion H22 wheels, 1000 cycles, 1000 grams load weight ASTM D3390, weight loss per revolution (mg)	0.6 mg	0.3 mg	0.5 mg
Tensile Strength kPa (psi) ASTM D412	400	550	700
Tear C kN/m (ppi) ASTM D624	90	110	130
Temperature Range C (F) Peak Damping Performance Temperature Range			
@ 10 Hz	-19°C to 14°C	-17°C to 24°C	-12°C to 29°C
@ 100 Hz	-15°C to 26°C	-12°C to 36°C	-8°C to 38°C
@ 1000 Hz	-10°C to 38°C	-8°C to 46°C	-3°C to 48°C
Dynamic Properties via DMA, 20°C			
Tan δ @ 10 Hz	0.3	0.3	0.4
Tan δ @ 100 Hz	0.5	0.5	0.6
Tan δ @ 1000 Hz	0.8	0.8	0.8
Flammability			
UL 94 6mm Thickness	Meets V-0	Meets V-0	Meets V-0
RoHS Compliant	Yes	Yes	Yes

The above technical information and data should be considered representative or typical only and should not be used for specification purposes.

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that Aeero Technologies believes are reliable, but the accuracy or completeness of such information is not guaranteed.


Product Use: Many factors beyond Aeero Technologies's control and uniquely within user's knowledge and control can affect the use and performance of a Aeero Technologies product in a particular application. Given the variety of factors that can affect the use and performance of an Aeero Technologies product, user is solely responsible for evaluating the Aeero Technologies product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy and Disclaimer: Unless an additional warranty is specifically stated on the applicable Aeero Technologies product packaging or product literature, Aeero Technologies warrants that each Aeero Technologies product meets the applicable Aeero Technologies product specification at the time Aeero Technologies ships the product. Aeero Technologies MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the Aeero Technologies product does not conform to this warranty, then the sole and exclusive remedy is, at Aeero Technologies's option, replacement of the Aeero Technologies product or refund of the purchase price.


Limitation of Liability: Except where prohibited by law, Aeero Technologies will not be liable for any loss or damage arising from the Aeero Technologies product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

ISODAMP™ C-6000 Series Molding Materials


Nomogram ISODAMP™ C-6040

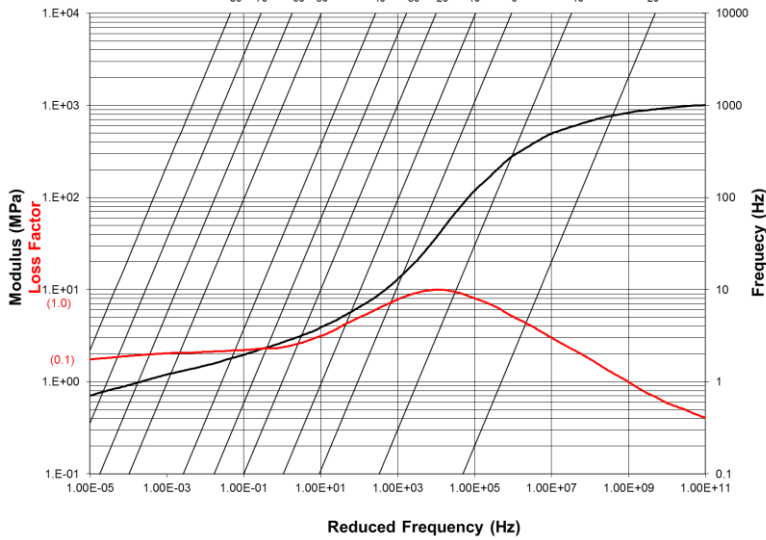

Nomogram ISODAMP™ C-6050

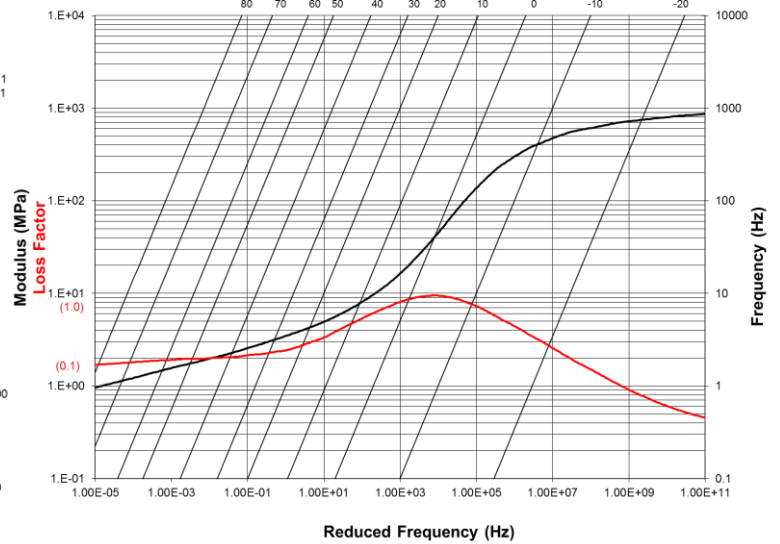

Nomogram ISODAMP™ C-6060

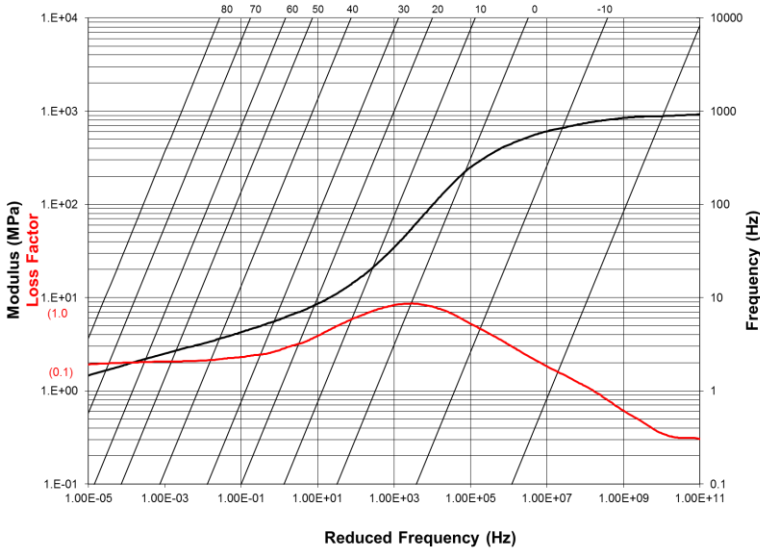

Shock, Noise and Vibration Solutions

©2015 Aearo Technologies • Printed 7.15

7911 Zionsville Road, Indianapolis, IN 46268
 Phone: 317-692-3000 Fax: 317-692-3111 Web: www.earglobal.com

Aearo Technologies LLC • a 3M company



3M, E-A-R and ISODAMP are trademarks of 3M Company and its affiliates