



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# MOS FET Relays G3VM-353H/H1

## Analog-switching MOS FET Relay with SPST-NC (Single-pole, Single-throw, Normally Closed) Contacts. General-purpose Series Added.

- New models in 350 load voltage with SPST-NC contacts and a 6-pin SOP package. General-purpose (high On-Resistance) series added.
- Continuous load current of 120 mA.
- Dielectric strength of 1,500 Vrms between I/O.
- RoHS Compliant.

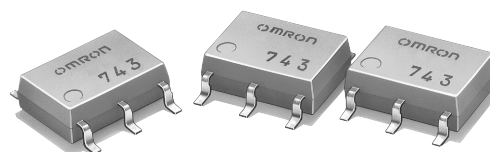

**NEW**

### Application Examples

- Broadband systems
- Measurement devices and Data loggers
- Amusement machines

**Note:** The actual product is marked differently from the image shown here.




### List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
SPST-NC	Surface-mounting terminals	350 VAC	G3VM-353H	75	---
			G3VM-353H1		
			G3VM-353H(TR)	---	2,500
			G3VM-353H1(TR)		

### Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

#### G3VM-353H/H1




Weight: 0.13 g

**Note:** The actual product is marked differently from the image shown here.


### Terminal Arrangement/Internal Connections (Top View)

#### G3VM-353H/H1



### Actual Mounting Pad Dimensions (Recommended Value, Top View)

#### G3VM-353H/H1




■ Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	Rating	Unit	Measurement conditions	
Input	LED forward current	$I_F$	50	mA		
	Repetitive peak LED forward current	$I_{FP}$	1	A	100 $\mu$ s pulses, 100 pps	
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.5	mA/ $^\circ\text{C}$	$T_a \geq 25^\circ\text{C}$	
	LED reverse voltage	$V_R$	5	V		
	Connection temperature	$T_j$	125	$^\circ\text{C}$		
Output	Load voltage (AC peak/DC)	$V_{OFF}$	350	V		
	Continuous load current	Connection A	$I_O$	120 (90)	mA	
		Connection B		120 (90)		
		Connection C		240 (180)		
	ON current reduction rate	Connection A	$\Delta I_{ON}/^\circ\text{C}$	-1.2 (-0.9)	mA/ $^\circ\text{C}$	$T_a \geq 25^\circ\text{C}$
Connection B			-1.2 (-0.9)			
Connection C			-2.4 (-1.8)			
Connection temperature	$T_j$	125	$^\circ\text{C}$			
Dielectric strength between input and output (See note 1.)		$V_{I-O}$	1,500	$V_{rms}$	AC for 1 min	
Operating temperature		$T_a$	-40 to +85	$^\circ\text{C}$	With no icing or condensation	
Storage temperature		$T_{stg}$	-55 to +125	$^\circ\text{C}$	With no icing or condensation	
Soldering temperature (10 s)		---	260	$^\circ\text{C}$	10 s	

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Connection Diagram

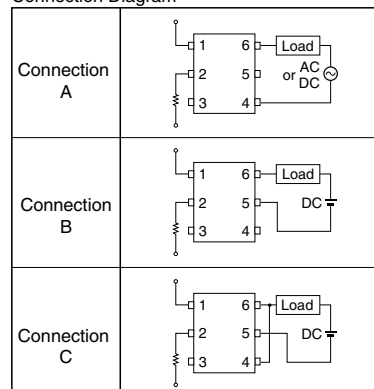


Values inside parentheses ( ) are for G3VM-353H1

■ Electrical Characteristics (Ta = 25°C)

Item		Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions	
Input	LED forward voltage	$V_F$	1.0	1.15	1.3	V	$I_F = 10 \text{ mA}$	
	Reverse current	$I_R$	---	---	10	$\mu\text{A}$	$V_R = 5 \text{ V}$	
	Capacity between terminals	$C_T$	---	30	---	pF	$V = 0, f = 1 \text{ MHz}$	
	Trigger LED forward current	$I_{FT}$	---	1.0	3.0	mA	$I_{OFF} = 10 \mu\text{A}$	
Output	Maximum resistance with output ON	Connection A	$R_{ON}$	---	15 (27)	25 (50)	$\Omega$	$I_O = 120 \text{ mA}$
		Connection B		---	8 (20)	14 (43)	$\Omega$	$I_O = 120 \text{ mA}$
		Connection C		---	4 (10)	---	$\Omega$	$I_O = 240 \text{ mA}$
Current leakage when the relay is open	$I_{LEAK}$	---	0.0105 (0.003)	1.0	$\mu\text{A}$	$V_{OFF} = 350 \text{ V}, I_F = 5 \text{ mA}$		
Capacity between terminals A Connection	$C_{OFF}$	---	65 (30)	---	pF	$V = 0, f = 1(100) \text{ MHz}, I_F = 5 \text{ mA}$		
Capacity between I/O terminals	$C_{I-O}$	---	0.8	---	pF	$f = 1 \text{ MHz}, V_s = 0 \text{ V}$		
Insulation resistance	$R_{I-O}$	1,000	---	---	$\text{M}\Omega$	$V_{I-O} = 500 \text{ VDC}, R_{oh} \leq 60\%$		
Turn-ON time	$t_{ON}$	---	0.15 (0.25)	1.0 (0.5)	ms	$I_F = 5 \text{ mA}, R_L = 200 \Omega, V_{DD} = 20 \text{ V}$ (See note 2.)		
Turn-OFF time	$t_{OFF}$	---	0.7 (0.5)	3.0 (1)	ms			

Note: 2. Turn-ON and Turn-OFF Times



Values inside parentheses ( ) are for G3VM-353H1

■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	$V_{DD}$	---	---	280	V
Operating LED forward current	$I_F$	5	---	25	mA
Continuous load current (AC peak/DC)	$I_O$	---	---	120 (90)	mA
Operating temperature	$T_a$	-20	---	65	$^\circ\text{C}$

Values inside parentheses ( ) are for G3VM-353H1


■ Engineering Data

G3VM-353H


LED forward current vs. Ambient temperature  
I<sub>F</sub> - T<sub>a</sub>

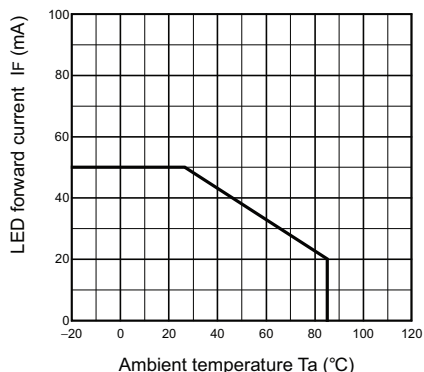


Continuous load current vs. Ambient temperature  
I<sub>O</sub> - T<sub>a</sub>

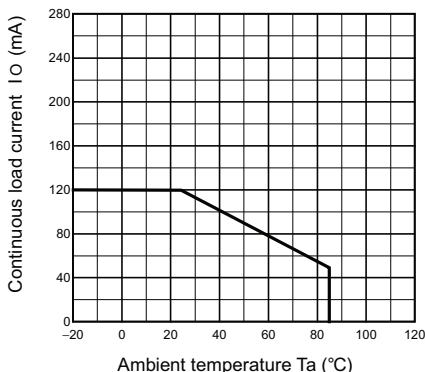


LED forward current vs. LED forward voltage  
I<sub>F</sub> - V<sub>F</sub>

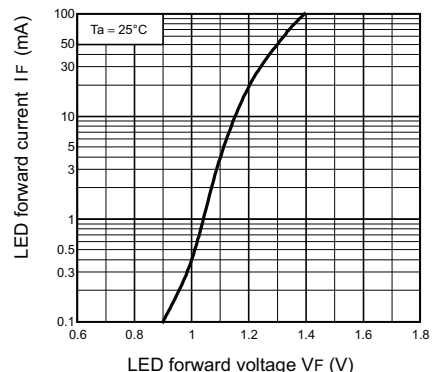


Continuous load current vs. On-state voltage  
I<sub>O</sub> - V<sub>ON</sub>

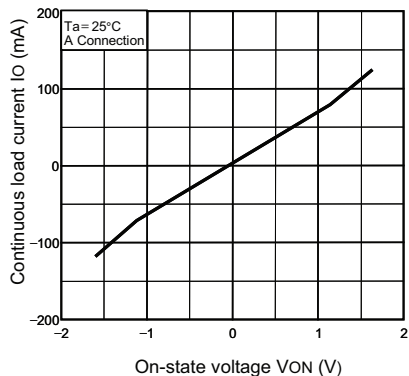


On-state resistance vs. Ambient temperature  
R<sub>ON</sub> - T<sub>a</sub>

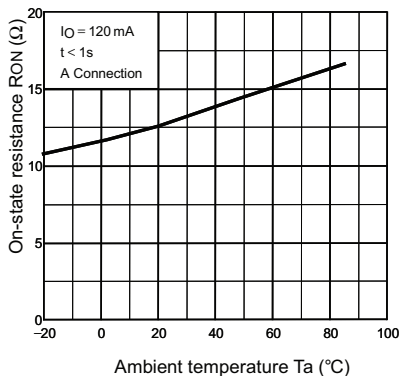


Trigger LED forward current vs. Ambient temperature  
I<sub>FC</sub> - T<sub>a</sub>

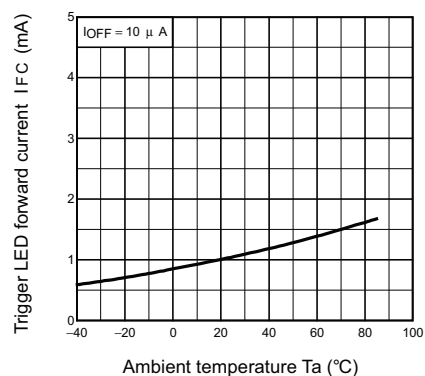


Turn ON, Turn OFF time vs. LED forward current  
t<sub>ON</sub>, t<sub>OFF</sub> - I<sub>F</sub>

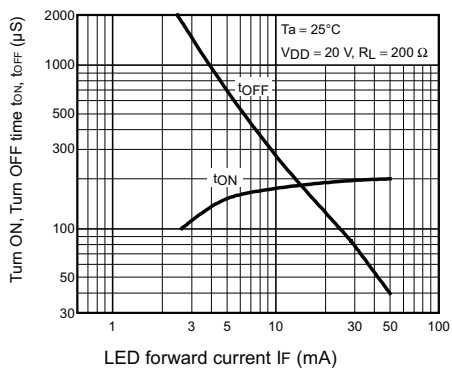

Turn ON, Turn OFF time vs. Ambient temperature  
t<sub>ON</sub>, t<sub>OFF</sub> - T<sub>a</sub>

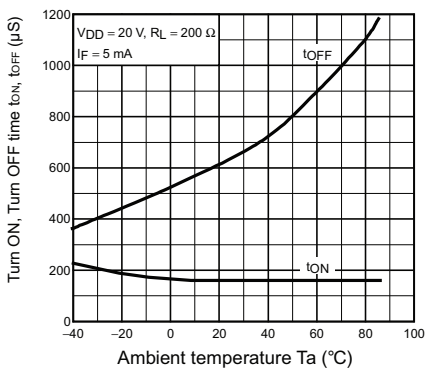


Current leakage vs. Ambient temperature  
I<sub>LEAK</sub> - T<sub>a</sub>

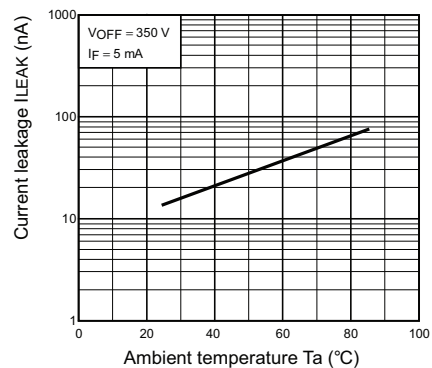


■ Engineering Data

G3VM-353H1


LED forward current vs. Ambient temperature  
IF - Ta

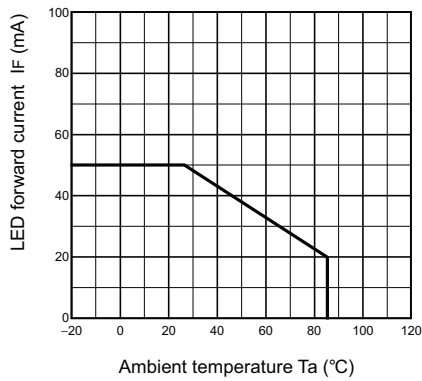


Continuous load current vs. Ambient temperature  
IO - Ta

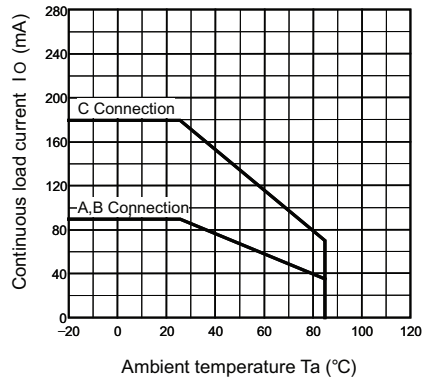


LED forward current vs. LED forward voltage  
IF - VF

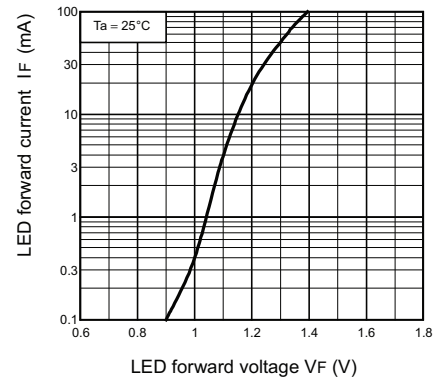


Continuous load current vs. On-state voltage  
IO - VON

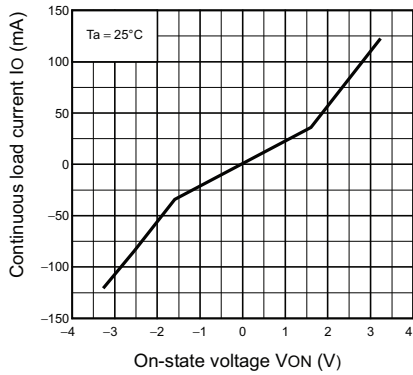


On-state resistance vs. Ambient temperature  
RON - Ta

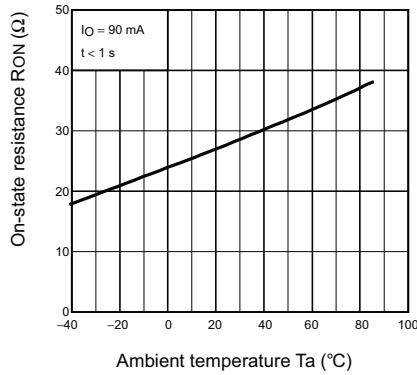


Trigger LED forward current vs. Ambient temperature  
IFC - Ta

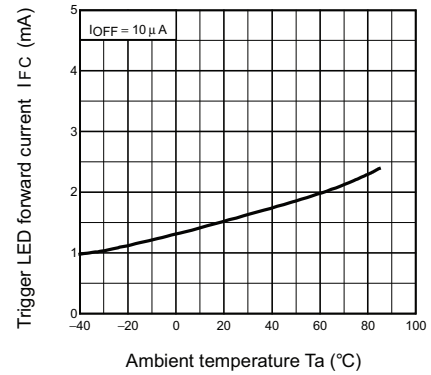


Turn ON, Turn OFF time vs. LED forward current  
tON, tOFF - IF

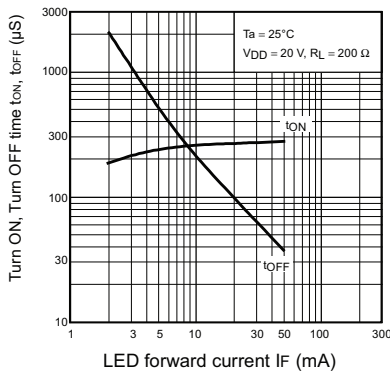


Turn ON, Turn OFF time vs. Ambient temperature  
tON, tOFF - Ta

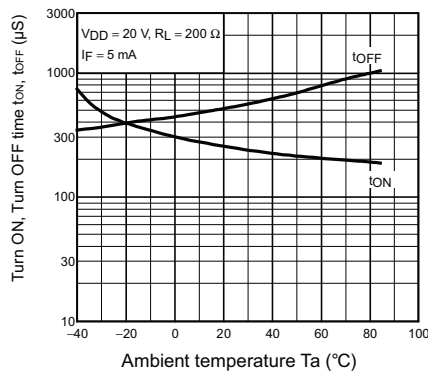

Current leakage vs. Ambient temperature  
ILEAK - Ta

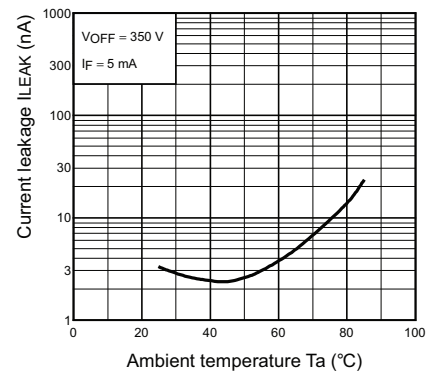

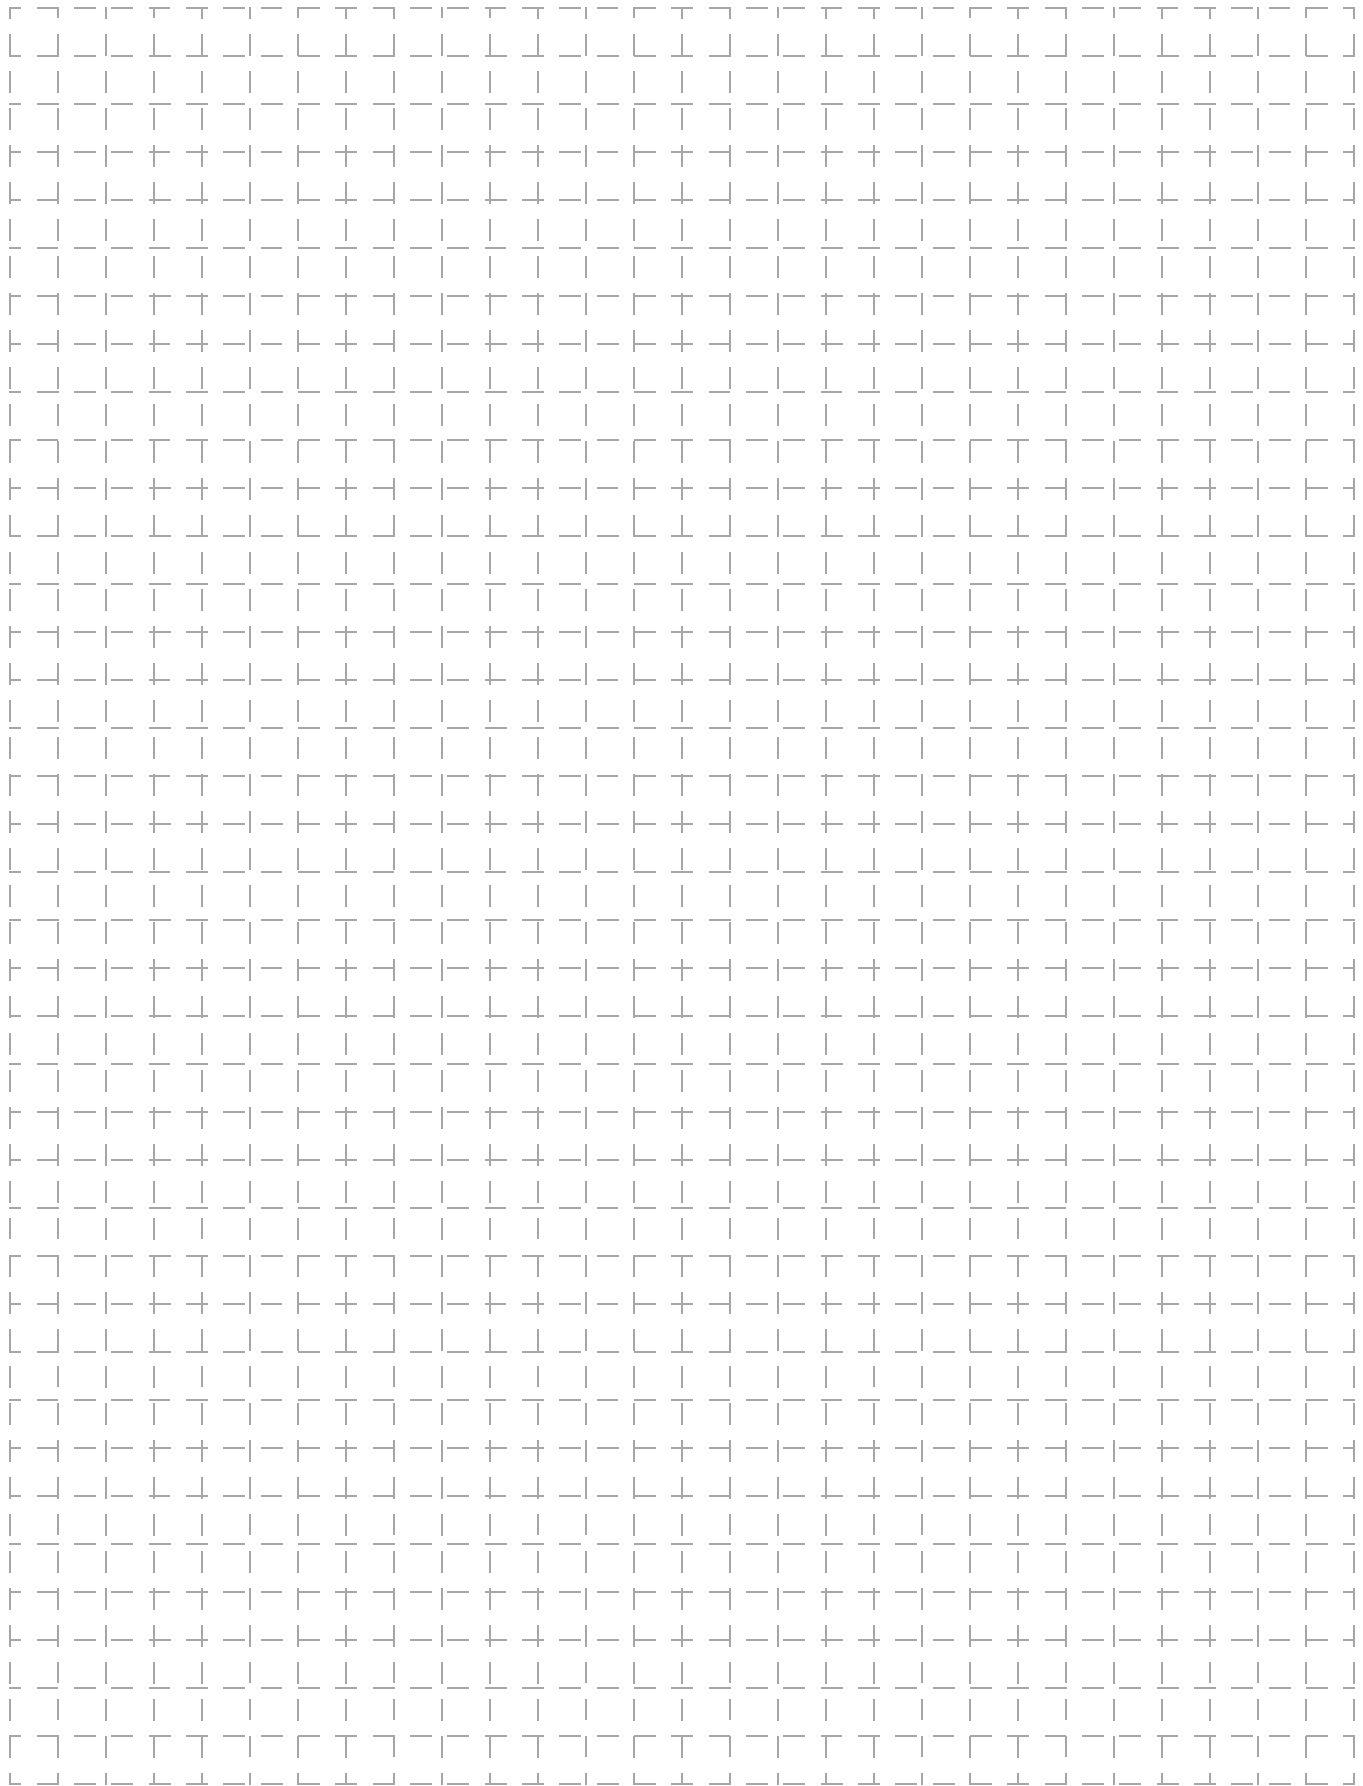

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at [http://www.components.omron.com/components/web/webfiles.nsf/sales\\_terms.html](http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html)

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**  
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

---

**OMRON**<sup>®</sup>

**OMRON ELECTRONIC  
COMPONENTS LLC**

55 E. Commerce Drive, Suite B  
Schaumburg, IL 60173

**847-882-2288**

**OMRON ON-LINE**

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

Cat. No. X302-E-1

12/10

Specifications subject to change without notice

Printed in USA