



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MOS FET Relay

G3VM-6(F)


New Model with Dielectric Strength of 400 V and 5,000 V between Input and Output Terminals

- UL1577 (File No. E67349) pending approval.
- EN60065 (Recognition No. 8318) pending approval.
- EN60950 (Recognition No. 8319) pending approval.
- VDE0884 (Recognition No. 9850781) pending approval.



Ordering Information

■ Appearance

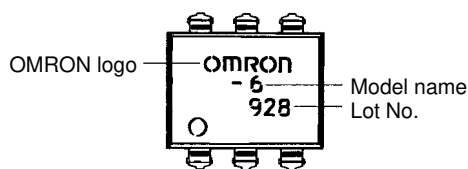

Note: "G3VM" is not printed on the actual product.

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick
SPST-NO	PCB terminals	400 VAC (DC or AC)	G3VM-6	50
	Surface-mounting terminals		G3VM-6F	50

Note: Only available on stick.

Application Examples

- Electronic automatic exchange systems
- Gauging control systems
- Data management systems
- Gauging systems

Specifications


■ Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	Ratings	Unit	
Input	LED forward current	I_F	30	mA	
	Repetitive peak LED forward current (Duty: 1% max.; pulse width: 100 μ s max.)	I_{FP}	1	A	
	LED reverse voltage	V_R	5	V	
Output	Output dielectric strength (see note 2)	Connection A	V_{BO}	DC or AC peak value: -400 to 400	V
		Connection B	V_{BO}	DC: 0 to 400	V
		Connection C			
	Continuous load current (see note 1)	Connection A	I_O	150	mA
Connection B		200			
Connection C		300			
Dielectric strength between I/O terminals (AC for 1 min, operating ambient humidity \leq 60%) (see note 2)		V_{I-O}	5,000	Vrms	
Ambient temperature (with no icing or condensation)		Ta	-40 to +85	°C	
Storage temperature (with no icing or condensation)		Tstg	-55 to +125	°C	
Soldering temperature (10 s)		---	260	°C	

Note: 1. The output load current varies depending on the ambient temperature. Refer to *Engineering Data*.

2. The dielectric strength was checked for each connection by applying a voltage between each pairing of pins 1, 2, and 3 and pins 4, 5, and 6.


Connection diagram

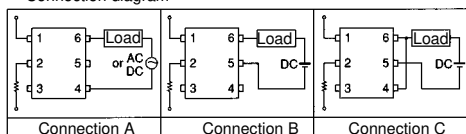

■ Electrical Characteristics (Ta = 25°C)

Item		Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Output ON resistance	Connection A	R_{ON}	---	---	12	Ω	$I_F=10$ mA, $I_{ON}=100$ mA
	Connection B		---	---	6		
	Connection C		---	---	3		
Current leakage when the relay is closed		I_{LEAK}	---	---	1.0	μ A	$V_{ON}=V_{BO}$
LED forward voltage		V_F	1.2	1.4	1.7	V	$I_F=10$ mA
Capacity between I/O terminals		C_{I-O}	---	0.8	---	pF	$f=1$ MHz
Insulation resistance between I/O terminals		R_{I-O}	5×10^{10}	---	---	Ω	$V_F=0$, $V_0=0$, $V_{I-O}=500$ VDC
Operating time		T_{ON}	---	---	1	ms	$I_F=10$ mA, $V_{DD}=20$ V, $R_L=200$ Ω (see note)
Release time		T_{OFF}	---	---	1	ms	$I_F=10$ mA, $V_{DD}=20$ V, $R_L=200$ Ω (see note)

Note: Switching Time Measuring Circuit









■ Recommended Operating Conditions

Item	Symbol	Minimum	Typical	Maximum	Unit
Operating voltage	V_{DD}	---	---	320	V
Forward current	I_F	10	15	20	mA
ON current	I_{ON}	---	---	150	mA
Operating temperature	T_{opr}	-20	---	80	°C

Engineering Data


■ Reference Data

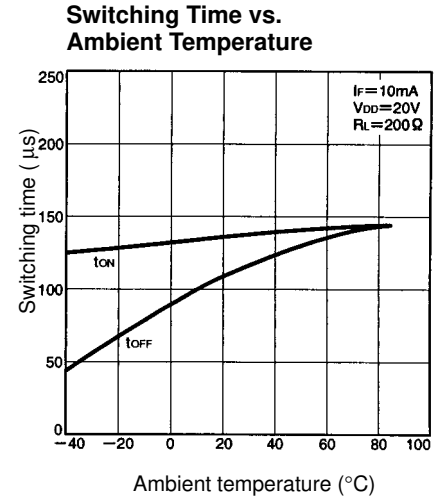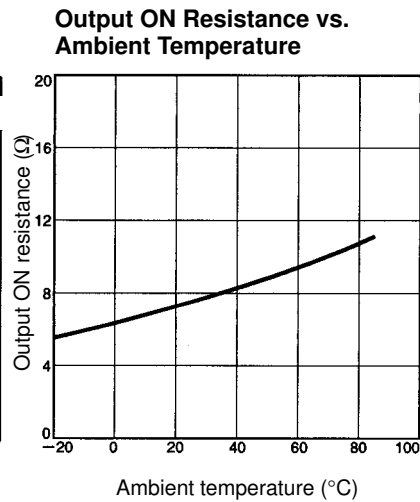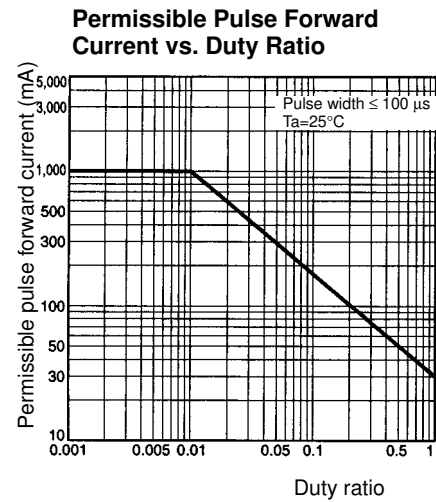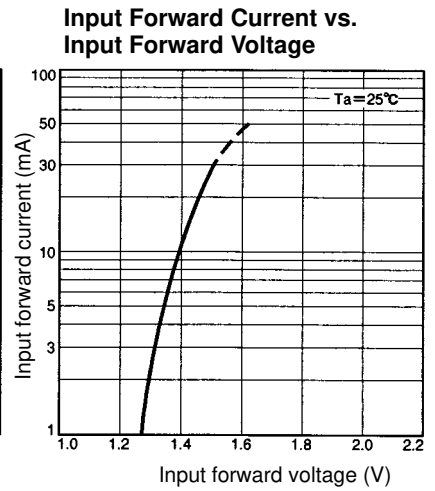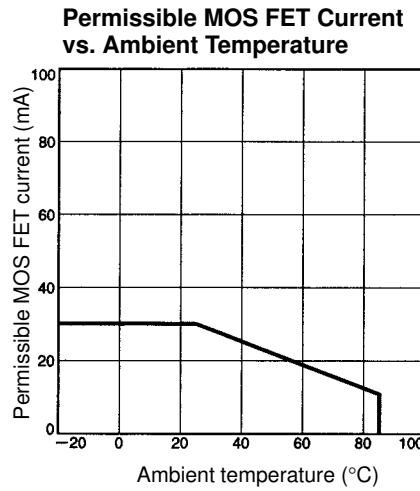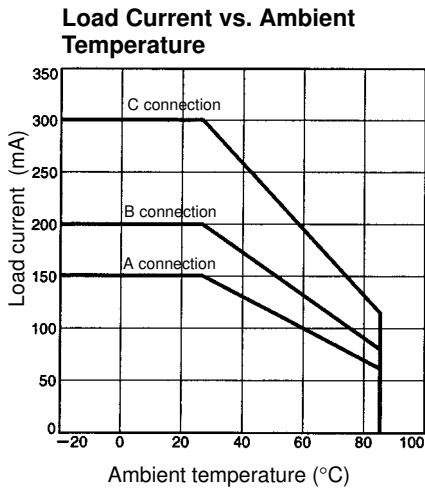


Dimensions

Note: All units are in millimeters unless otherwise indicated.


G3VM-6




Unit: mm
Weight: 0.49 g

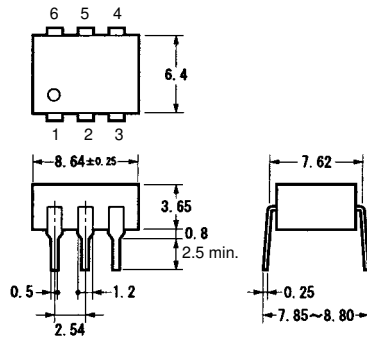

Terminal Arrangement/
Internal Connections
(Top View)




Actual Mounting Pad
Dimensions (Recommended Value, Top View)




Note: "G3VM" is not printed on the actual product.


G3VM-6F




Unit: mm
Weight: 0.49 g

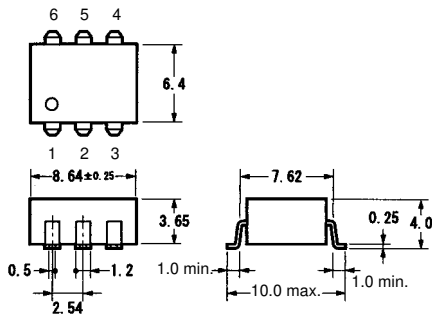

Terminal Arrangement/
Internal Connections
(Top View)



Actual Mounting Pad
Dimensions (Recommended Value, Top View)



Note: "G3VM" is not printed on the actual product.

Precautions

■ Correct Use

Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Min.	Type	Max.
Operating LED forward current	---	1 mA	5 mA
Releasing LED forward voltage	0.1 V	0.5 V	---