



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# G5NB-EL

PCB Power Relay

## A slim compact Relay with 7 A switching capacity

- 7 A (250 VAC), 5 A (30 VDC) high capacity switching with compact size.
- Minimum 200,000 operations durability at 5 A (250 VAC) switching.
- IEC/EN 60335-1 conformed.
- Ambient operating temperature: max. 85°C

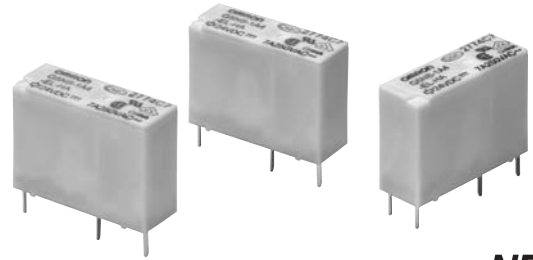

**NEW**

RoHS Compliant

### Model Number Legend

G5NB-□□□-□-□  
           1  2  3  4  5

- |   |   |
|---|---|
| <p><b>1. Number of Poles</b><br/>1 : 1-pole</p> <p><b>2. Contact Form</b><br/>A : SPST-NO (1a)</p> <p><b>3. Enclosure rating</b><br/>4 : Fully sealed</p> | <p><b>4. Classification</b><br/>EL : High capacity and electrical durability</p> <p><b>5. Conformity standard</b><br/>HA : IEC/EN 60335-1 conformed</p> |
|---|---|

### Application Examples

- Home appliances
- Industrial equipment
- Building automation

G5NB-EL

### Ordering Information

Classification	Item Contact form	Enclosure rating	Model	Rated coil voltage	Minimum packing unit
Single stable relay	SPST-NO (1a)	Fully Sealed	G5NB-1A4-EL-HA	5, 12, 24 VDC	100 pcs/Tray

Note. When ordering, add the rated coil voltage to the model number.

Example: G5NB-1A4-EL-HA DC12

Rated coil voltage

However, the notation of the coil voltage on the product case as well as on the packing will be marked as □□ VDC.

### Ratings

#### Coil

Rated voltage	Item Rated current (mA)	Coil resistance (Ω)	Must operate voltage (V)	Must release voltage (V)	Max. voltage (V)	Power consumption (mW)
			% of rated voltage			
5 VDC	40.0	125	75% max.	10% min.	160% (at 23°C)	Approx. 200
12 VDC	16.7	720				
24 VDC	8.3	2,880				

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

Note 2. The operating characteristics are measured at a coil temperature of 23°C.

Note 3. The "Max. voltage" is the maximum voltage that can be applied to the relay coil.

#### Contacts

Item	Load	Resistive load
Contact Type		Single
Contact material		Ag-alloy (Cd free)
Rated load		5 A at 250 VAC, 7 A at 250 VAC
		5 A at 30 VDC
Rated carry current		5 A at DC, 7 A at AC
Max. switching voltage		250 VAC, 30 VDC
Max. switching current		5 A at DC, 7 A at AC

## Characteristics

Contact resistance *1		100 mΩ max.
Operate time		10 ms max.
Release time		10 ms max.
Insulation resistance *2		1,000 MΩ min.
Dielectric strength	Between coil and contacts	4,000 VAC, 50/60 Hz for 1 min
	Between contacts of the same polarity	750 VAC, 50/60 Hz for 1 min
Insulation distance	Between coil and contacts	Clearance: 6 mm, Creepage: 6 mm
Impulse withstand voltage	Between coil and contacts	10 kV (1.2 x 50 μs)
Vibration resistance	Destruction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
	Malfunction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
Shock resistance	Destruction	1,000 m/s <sup>2</sup>
	Malfunction	100 m/s <sup>2</sup>
Durability	Mechanical	5,000,000 operations min.
	Electrical (resistive load)	200,000 operations at 250 VAC, 5 A 50,000 operations at 250 VAC, 7 A 100,000 operations at 30 VDC, 5 A (with a rated load at 900 operations/h)
Failure rate (P level) (reference value) *3		DC5V 10mA
Ambient operating temperature		-40°C to 85°C (with no icing or condensation)
Ambient operating humidity		5% to 85%
Weight		Approx. 4 g

Note. The data shown above are initial value.


\*1. Measurement conditions: 5 VDC, 1 A, voltage drop method

\*2. Measurement conditions: Measured at the same points as the dielectric strength using a 500 VDC ohmmeter.


\*3. This value was measured at a switching frequency of 120 operations/min.

## Engineering Data


### Maximum Switching Capacity

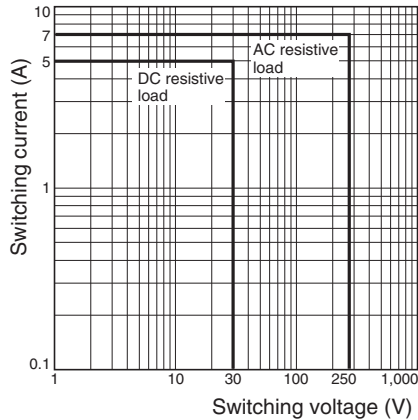


### Durability

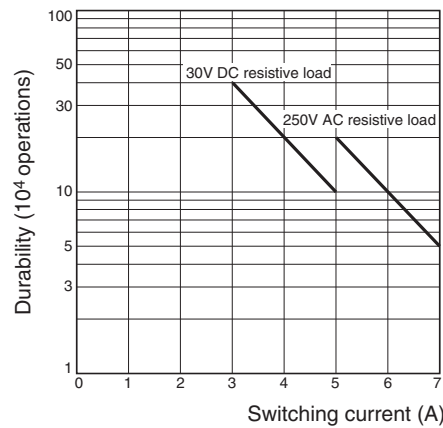

### Ambient Temperature vs. Maximum Coil Voltage

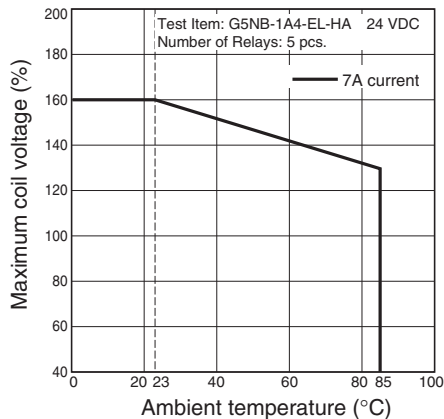

### Shock malfunction

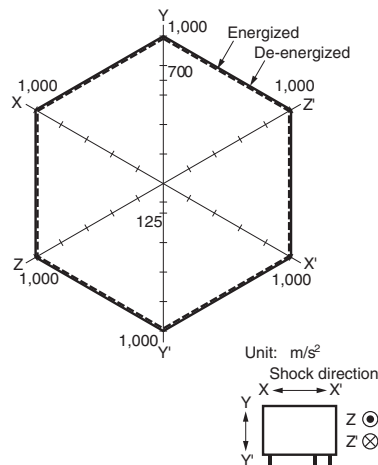

Test Item: G5NB-1A4-EL-HA 24 VDC  
Number of Relays: 5 pcs

Test Method: Shock was applied 3 times in 6 directions along 3 axes and the level at which shock caused malfunction was measured.

Rating: 100 m/s<sup>2</sup>


**Note:** The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.




## ■Dimensions

(Unit: mm)


### G5NB-1A4-EL-HA

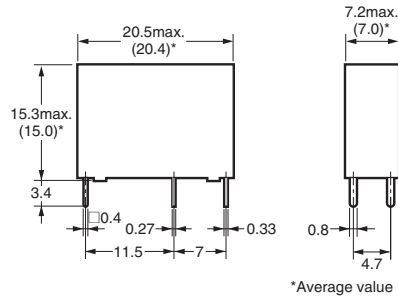

**PCB Mounting Holes**  
(Bottom View)  
Tolerance:  $\pm 0.1$  mm



**Terminal Arrangement/  
Internal Connections**  
(Bottom View)



(No coil polarity)

## ■Approved Standards

The approval rating values for overseas standards are different from the performance values determined individually. Confirm the values before use.

●UL Recognized: (File No. E41515)

CSA Certified: (File No. LR31928)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5NB-1A4-EL-HA	SPST-NO (1a)	5 to 24V DC	7A 250V AC (General Purpose) 85°C	30,000
			5A 250V AC (General Purpose) 85°C	50,000
			5A 30V DC (Resistive) 85°C	6,000

●EN/IEC, VDE Certified (Certificate No. 137575)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5NB-1A4-EL-HA	SPST-NO (1a)	5, 12, 24V DC	7A 250V AC (Resistive) 85°C	10,000
			5A 30V DC (Resistive) 85°C	

## ■Precautions

●Please refer to “PCB Relays Common Precautions” for correct use.

## ■Other data

Creepage distance	6.0 mm
Clearance distance	6.0 mm
Insulation Material Group	III a
Type of insulation coil-contact circuit	Reinforced
open contact circuit	Micro disconnection
Rated Insulation Voltage	250V
Pollution degree	3
Rated voltage system	250V
Overvoltage category	III
Category of protection according to IEC 61810-1	RT III
Glow wire according to IEC 60335-1	<HA Models only> GWT 750°C min. (IEC 60695-2-11) / GWF1 850°C min. (IEC 60695-2-12)
Tracking Index of relay base	PTI 250V min. (housing Parts)
Flammability class according to UL94	V-0

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.  
• Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

**Note: Do not use this document to operate the Unit.**