



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




G8V-RH

Automotive high current Micro 280 relay

High current Micro 280 terminal layout

- Both SPST and SPDT available
- Miniaturized package (reduced outer length and width)
- L x W x H = 22.5 x 15 x 25.5 mm nominal
- 280-terminal type
- Full automated assembly

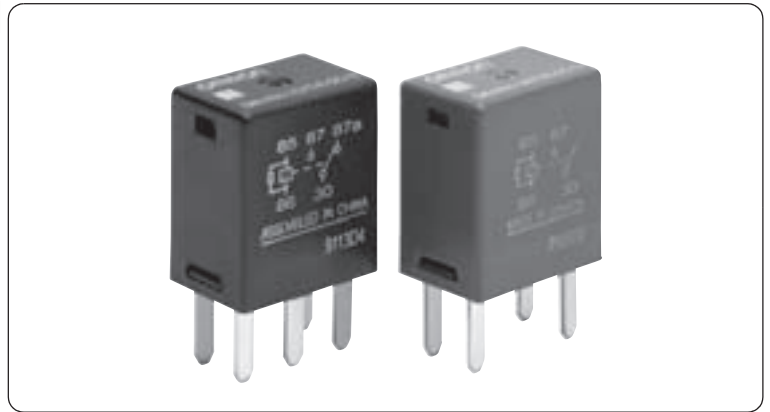

■ Type standard

G8V-RH-□□□□-□

① ② ③ ④ ⑤

	Classification	Symbol	Meaning of the symbol
①	Number of contact poles	1	Number of contact poles
②	Contact structure	A	1a contact
		C	1c contact
③	Protective structure	7	Unsealed (In a case)
④	Terminal form	T	Plug-in type
⑤	Surge suppressor	R	Built-in resistor

■ Classification

Classification	Terminal form	Contact structure	Protective structure	Rated coil		Type
				Voltage (V)	Resistance (Ω)	
280 Micro	Plug-in 280 terminal	SPST (1a)	Unsealed (In a case)	DC12	85	G8V-RH-1A7T-R
		SPDT (1c)				G8V-RH-1C7T-R

■ Ratings

● Operation coil

Rated voltage (V)	Coil resistance (Ω)			Rated current (mA)	Operating voltage (V)	Release voltage (V)	Service voltage range (V)	Rated power consumption (mA)
	Between terminals	Internal coil	Surge suppressor resistance					
DC 12	85	97	1/2W 680	141	8.0 or less	1.0 or more	DC10 to 16	1694

● Switching area

Item	Performance	
Contact material	Silver alloy	
Rated voltage	DC12V	
Rated load	N.O. side	Resistance load, 35A
	N.C. side	Resistance load, 20A
Inrush current	N.O. side	90A
	N.C. side	60A
Continuous carry current*1	N.O. side	35A
	N.C. side	20A
Min. Carry / Switching Current	DC12V 1A	

Please confirm Omron Safety Precautions for all automotive relays first.
Omron can not guarantee automotive relays before finish making a contract with product

■ Performance

Item		Standard value
Voltage drop between terminals	N.O. side	150mV or less, 10A
	N.C. side	175mV or less, 10A
Operating time ²		Max. 10ms at 14V (Normally 4ms)
Release time ²		Max. 10ms at 14V (Normally 1.8 ms)
Insulation resistance ³	Between coil and terminal	20MΩ or more
	Between homopolar contacts	20MΩ or more
Withstand voltage ⁴	Between coil and terminal	AC500V, for 1minute
	Between homopolar contacts	AC500V, for 1minute
Vibration tolerance	Durability	33Hz 43.1m/s ²
	Malfuction	20 to 500Hz 43.1m/s ²
Mechanical endurance		1,000,000 times
Electrical endurance		100,000 times
Ambient temperature		-40 to +125°C
Ambient humidity		35 to 95%RH
Weight		Approx. 19.3g

■ Packing


Packing form	Tray
MOQ ⁵	480pcs (96pcs×5trays)

Note: All values above are measured in early time under an ambient temperature of +20°C and humidity of 65% unless stated.


- *1. The value stated is at maximum temperature in a guaranteed ambient temperature.
- *2. Bounce time is not included.
- *3. Measured at DC500V.
- *4. Measured under 1mA of leak current, 50/60Hz for 1minute.
- *5. Minimum Order Quantity is subject to change, please feel free to contact our sales representatives.

■ Dimensions (Unit: mm)


G8V-RH-1A7T-R

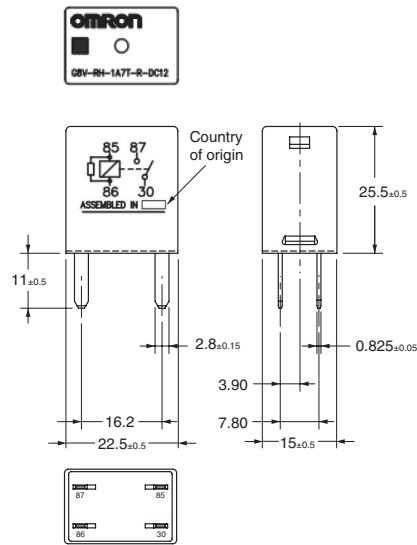


Terminal arrangement / Internal connections (BOTTOM VIEW)



G8V-RH-1C7T-R

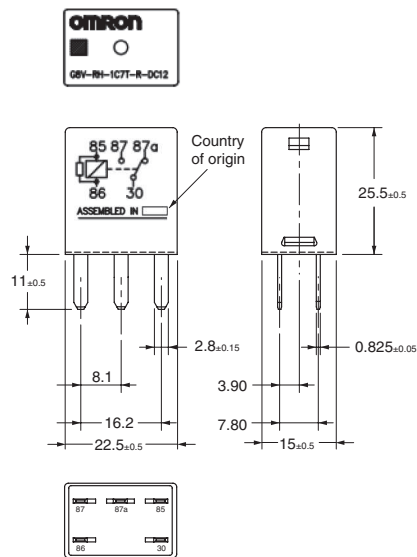

Terminal arrangement / Internal connections (BOTTOM VIEW)



* Tolerance unless otherwise specified
 Less than 1 mm: ±0.1 mm
 Less than 1 to 3 mm: ±0.2 mm
 3 mm or more: ±0.3 mm

Please confirm Omron Safety Precautions for all automotive relays first.
 Omron can not guarantee automotive relays before finish making a contract with product