



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




G8VA

Automotive low profile micro 280 terminal layout relay

This world's smallest Plug-in relay. Versatile usage for several different kinds of applications inside the relay boxes.

- Miniaturized package (reduced footprint and height)
- L x W x H = 15.5 x 15.0 x 16.4 mm nominal
- 280-terminal type
- Full automated assembly

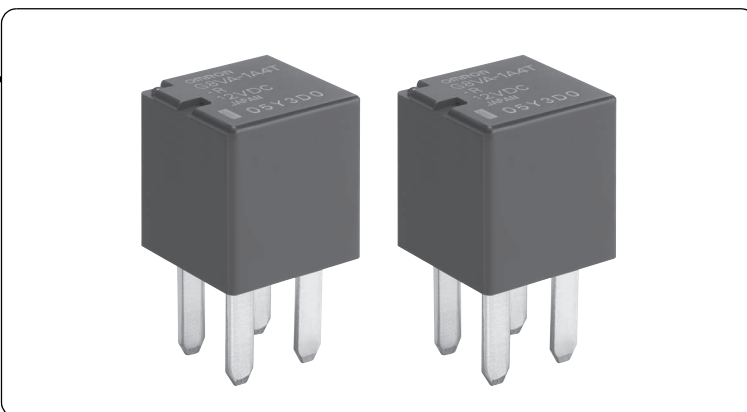

■ Type standard

G8VA-□□□□-□
① ② ③ ④ ⑤

	Classification	Symbol	Meaning of the symbol
①	Number of contact poles	1	Number of contact poles
②	Contact structure	A	1a contact
③	Protective structure	4	Simple plastic seal
④	Terminal form	T	Plug-in type
⑤	Surge suppressor	R	Built-in resistor

■ Classification

Classification	Terminal form	Contact structure	Protective structure	Rated coil voltage		Type
				Voltage (V)	Resistance (Ω)	
Micro 280	Plug-in 280 terminal	SPST (1a)	Simple plastic seal	DC12	132	G8VA-1A4T-R

■ Ratings

● Operation coil

Rated voltage (V)	Coil resistance (Ω)			Rated current (mA)	Operating voltage (V)	Release voltage (V)	Service voltage range (V)	Rated power consumption (mA)
	Between terminals	Internal coil	Surge suppressor resistance					
DC12	132	150	1/4W 1.1k	90.9	7.5 or less	1.0 or more	DC10 to 16	1091

● Switching area

Item	Performance
Contact material	Silver alloy
Rated voltage	DC12V
Rated load	Resistance load, 15A
Inrush current	80A
Continuous carry current*1	15A
Min. Carry / Switching Current	DC12V 1A

Please confirm Omron Safety Precautions for all automotive relays first.
Omron can not guarantee automotive relays before finish making a contract with product specifications.

OMRON

Performance

Item		Value of Standard
Voltage drop between terminals		200mV or less, 15A
Operating time ^{*2}		10ms or less
Release time ^{*2}		10ms or less
Insulation resistance ^{*3}	Between coil and terminal	10MΩ or more
	Between homopolar contacts	10MΩ or more
Withstand voltage ^{*4}	Between coil and terminal	AC500V for 1minute
	Between homopolar contacts	AC500V for 1minute
Vibration tolerance	Durability	33Hz 44.1m/s ²
	Malfunction	33Hz 44.1m/s ²
Shock resistance	Durability	1000m/s ² (Operating time:6ms)
	Malfunction	100m/s ² (Operating time:11ms)
Mechanical endurance		1,000,000 times
Electrical endurance		100,000 times
Ambient temperature		-30 to +100°C
Ambient humidity		35 to 85%RH
Weight		10g

Packing

Packing form	Tray
MOQ ^{*5}	500pcs (50pcs×10 trays)

Note: All values above are measured in early time under an ambient temperature of +20°C and humidity of 65% unless stated.

*1. The value stated is at maximum temperature in a guaranteed ambient temperature.

*2. It changes depend on how a rated voltage is operated, but bounce-time is not included.


*3. Measured at DC500V.

*4. Measured under 1mA of leak current, 50/60Hz for 1minute.



*5. Minimum Order Quantity is subject to change, please feel free to contact our sales representatives.

Dimensions (Unit: mm)

G8VA-1A4T-R

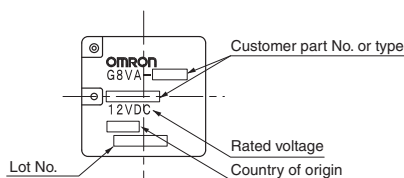

Terminal arrangement /
Internal connections
(BOTTOM VIEW)

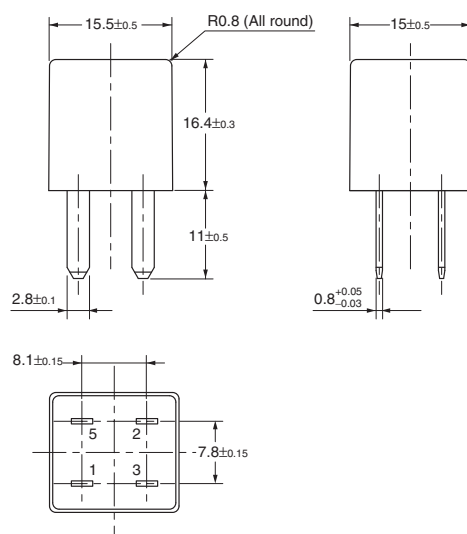

* Tolerance unless otherwise specified
Less than 1 mm: ±0.1 mm
Less than 1 to 3 mm: ±0.2 mm
3 mm or more: ±0.3 mm

Please confirm Omron Safety Precautions for all automotive relays first.

Omron can not guarantee automotive relays before finish making a contract with product specifications.