



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





HIGH HUMIDITY ENVIRONMENTS MINI PROBE (MRBD)

SPECIFICATIONS

- High degree of resistance to moisture and high humidity environments (Standard IEC 60068-2-3. Storage in Damp Heat, Air temperature @ +50°C, Relative Humidity 95% for 56 Days)
- Smaller than regular BetaCURVE Interchangeable Series
- Fast time response
- Suitable for encapsulation into small housings or special enclosures
- Various lead lengths available

NTC Thermistor soldered to 32 AWG Solid Silver Plated Copper Wire with PTFE Insulation. Unit is potted in a polyimide tube with thermally conductive epoxy.

HIGH HUMIDITY ENVIRONMENTS MINI PROBE (MRBD)

FEATURES

- High degree of resistance to moisture and high humidity environments (Standard IEC 60068-2-3)
- Rapid Time Constant
(400 milliseconds in liquids).
- Standards supplied with $\pm 0.2^{\circ}\text{C}$ tolerance
(0°C to $+70^{\circ}\text{C}$).
- Custom tolerances available on request
- Temperature range -40°C to $+100^{\circ}\text{C}$

APPLICATIONS

- Reduced size allows localized and rapid temperature sensing
- Small Biomedical probes and catheter assemblies
- Temperature monitoring in Communication systems
- Micro-flow sensing
- Instrumentation and specialist probes

PERFORMANCE SPECS

Parameters	Units	Value
Nominal Resistance at $+25^{\circ}\text{C}$	Ohms	10000
Resistance tolerance from 0°C to $+70^{\circ}\text{C}$	$^{\circ}\text{C}$	± 0.2
Alpha Value at $+25^{\circ}\text{C}$	$\%/^{\circ}\text{C}$	- 4.39
Beta Value 25/85	K	3976
Tolerance on Beta Value 25/85	%	± 0.5
Time response in Liquids	milliseconds	400
Dissipation Constant in still air	$\text{mW}/^{\circ}\text{C}$	0.5

MECHANICAL DETAILS

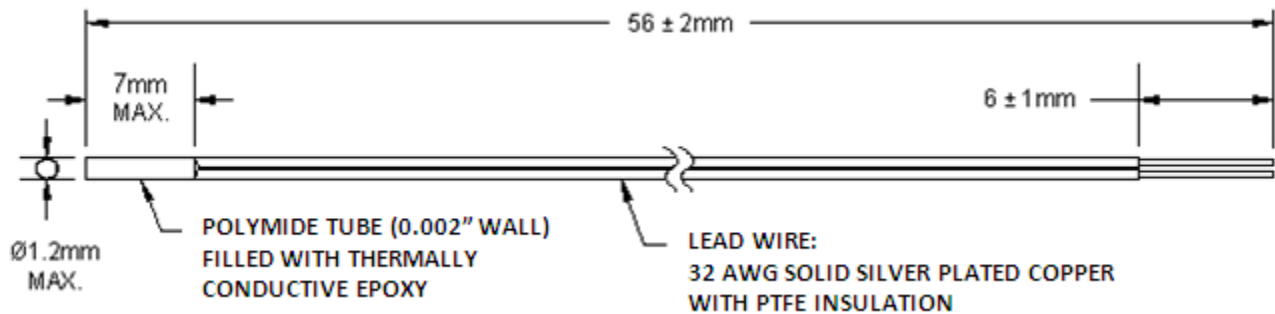


Figure 1: Mini BetaCURVE Thermistor Probe (MRBD) – High Humidity environments

HIGH HUMIDITY ENVIRONMENTS MINI PROBE (MRBD)

RESISTANCE V TEMPERATURE TABLE

Temp. °C	Ohms
-40	336,109
-39	314,563
-38	294,534
-37	275,905
-36	258,571
-35	242,434
-34	227,404
-33	213,399
-32	200,344
-31	188,168
-30	176,807
-29	166,202
-28	156,298
-27	147,045
-26	138,396
-25	130,309
-24	122,743
-23	115,663
-22	109,034
-21	102,825
-20	97,008
-19	91,554
-18	86,440
-17	81,642
-16	77,139
-15	72,912
-14	68,941
-13	65,210
-12	61,703
-11	58,406
-10	55,304
-9	52,385
-8	49,638
-7	47,051
-6	44,614
-5	42,317

Temp. °C	Ohms
-4	40,152
-3	38,110
-2	36,184
-1	34,367
0	32,651
1	31,031
2	29,501
3	28,054
4	26,688
5	25,395
6	24,173
7	23,016
8	21,921
9	20,885
10	19,903
11	18,973
12	18,092
13	17,257
14	16,465
15	15,714
16	15,001
17	14,325
18	13,682
19	13,073
20	12,493
21	11,943
22	11,420
23	10,923
24	10,450
25	10,000
26	9,572
27	9,165
28	8,777
29	8,408
30	8,056

Temp. °C	Ohms
31	7,721
32	7,402
33	7,097
34	6,807
35	6,530
36	6,266
37	6,014
38	5,774
39	5,544
40	5,325
41	5,116
42	4,916
43	4,724
44	4,542
45	4,367
46	4,200
47	4,040
48	3,887
49	3,741
50	3,601
51	3,467
52	3,339
53	3,216
54	3,098
55	2,985
56	2,877
57	2,773
58	2,674
59	2,579
60	2,487
61	2,399
62	2,315
63	2,234
64	2,157
65	2,082

Temp. °C	Ohms
66	2,011
67	1,942
68	1,876
69	1,813
70	1,752
71	1,693
72	1,637
73	1,582
74	1,530
75	1,480
76	1,432
77	1,385
78	1,341
79	1,298
80	1,256
81	1,216
82	1,178
83	1,141
84	1,105
85	1,070
86	1,037
87	1,005
88	974
89	945
90	916
91	888
92	862
93	836
94	811
95	787
96	764
97	741
98	720
99	699
100	678

ORDERING INFORMATION

Part Number	Description	Ω @25°C	MOQ
10K3MRBD1	Mini BetaCurve Thermistor Probe (MRBD)	10000	1000 *

* For quantities less than Minimum Order Quantity – contact distribution

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
910 Turnpike Road
Shrewsbury, MA 01545
Tel: 1-508-842-0516
Fax: 1-508-842-0342
Sales: temperature.cs.amer@meas-spec.com

EUROPE

Measurement Specialties (Europe), Ltd.,
a TE Connectivity Company
Ballybrit Business Park
Galway Ireland
Tel: +353-91-753238
Fax: +353-91-770789
Sales: temperature.cs.emea@meas-spec.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Sales: temperature.cs.asia@meas-spec.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.