



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

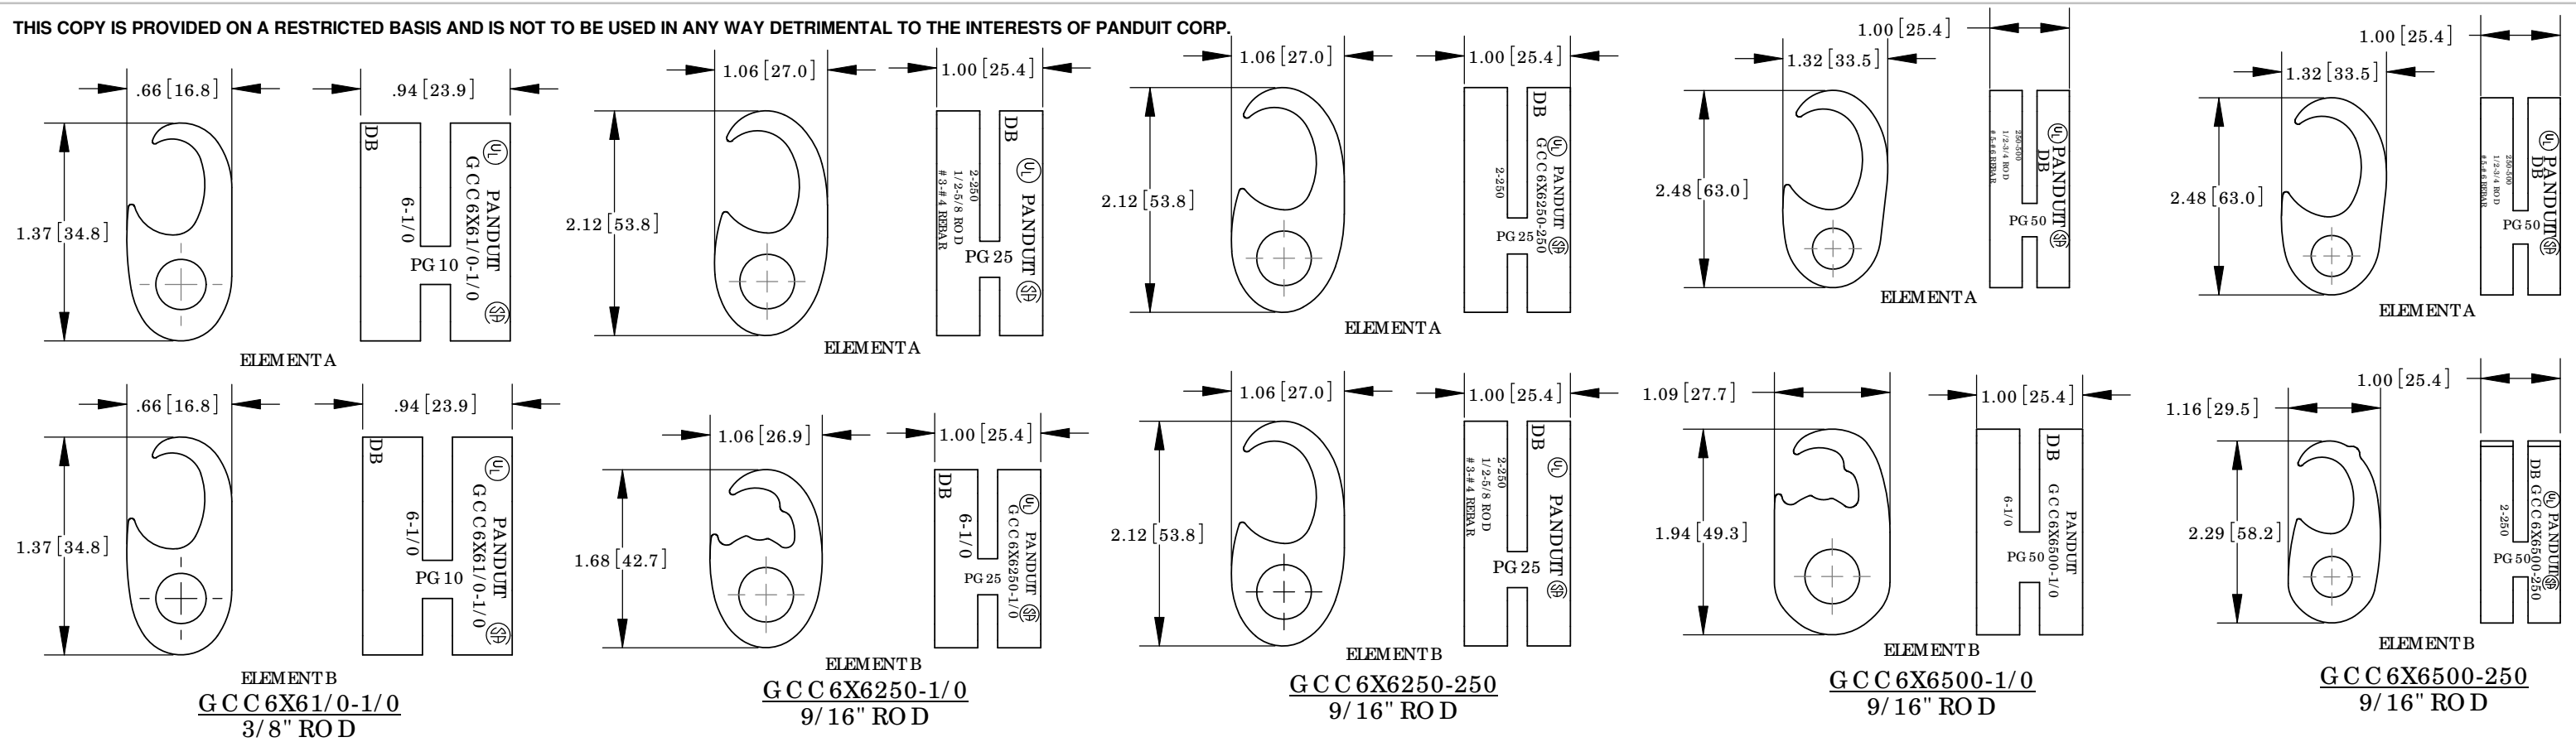

PANDUIT PART NUMBER	ELEMENT A - AWG [mm]			ELEMENT B - AWG [mm]		PANDUIT COLOR CODE	PANDUIT DIE INDEX NO.	STD. PKG QTY
	COPPER CABLE	GROUND ROD	REBAR	COPPER CABLE	REBAR			
GCC6X61/0-1/0	#6 SOL - 1/0 STR. [16-50 SQ. mm]	N/A	N/A	#6 SOL - 1/0 STR [16-50 SQ mm]		RED	PG10	1
GCC6X6250-1/0	2 SOL - 250 kcmil [35-120 SQ. mm]	1/2"-5/8" ROD [12.7-15.9 mm]	3/8"-1/2"; #3-#4 REBAR [9.5-12.7mm; #10M-#13M REBAR]	#6 SOL - 1/0 STR [16-50 SQ mm]		BLACK	PG25	1
GCC6X6250-250	2 SOL - 250 kcmil [35-120 SQ. mm]	1/2"-5/8" ROD [12.7-15.9 mm]	3/8"-1/2"; #3-#4 REBAR [9.5-12.7mm; #10M-#13M REBAR]	2 SOL - 250 kcmil [35-120 SQ mm]				
GCC6X6500-1/0	250 - 500 kcmil [150-240 SQ. mm]	1/2"-3/4" ROD [12.7-19.1 mm]	5/8"-3/4"; #5-#6 REBAR [15.9-19.1mm; #16M-#19M REBAR]	#6 SOL - 1/0 STR [16-50 SQ mm]		BLUE	PG50	1
GCC6X6500-250	250 - 500 kcmil [150-240 SQ. mm]	1/2"-3/4" ROD [12.7-19.1 mm]	5/8"-3/4"; #5-#6 REBAR [15.9-19.1mm; #16M-#19M REBAR]	2 SOL - 250 kcmil [35-120 SQ mm]				



DB RA TED



NOTES

- DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.
- UL467 LISTED AND CSA 22.2 CERTIFIED FOR GROUNDING & BONDING SUITABLE FOR DIRECT BURIAL IN EARTH OR CONCRETE WHEN CRIMPED WITH PANDUIT OR INDUSTRY STANDARD CRIMPING TOOLS & PANDUIT DIES.
- ENHANCED CRIMP PROCESS WITH PATENTED TECHNOLOGY MEETS IEEE STD 837 - 2002.
- PRE-APPLIED ANTI-OXIDANT COMPOUND ENSURES A HIGH QUALITY MECHANICAL AND ELECTRICAL BOND, SPEEDING INSTALLATION.
- CABLE TIES ARE PROVIDED WITH THE TAPS TO RETAIN WIRES IN POSITION DURING CRIMPING.

REV	DATE	BY	CHK	DESCRIPTION	ECN	-R	SUP
02	12/10	JHNU	JHNU	ADDED AGENCY LOGOS	N41749BC-C41749	FLD	FLD
01	3/09	JHNU	RGB	REV'D MARKING ON ELEMENT A OF GCC6X6250-1/0, ELEMENT B OF GCC6X6250-250, ELEMENT A OF GCC6X6500-1/0, ELEMENT A OF GCC6X6500-250 TO SHOW REBAR INFO, REMOVED *NOTE			
00	4/08	JHNU	RGB	DRAWING RELEASED			

PANDUIT CORP. TINLEY PARK, ILLINOIS

6X6 GROUNDING CONNECTORS
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCES ARE:
(.X) ± .005
(.XX) ± .03
ANGLES ± 1°

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN IN
INCHES, THIRD ANGLE PROJECTION

DRAWN BY
JHNU
DATE
4/08
CHK'D

HIGH CONDUCTIVITY
COPPER

SCALE NONE
DRAWING NO / CAD FILE
C41749_02
DWG
B
SIZE