



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





■ Features :

- Interchangeable AC plugs (plug kit sold separately)
- Universal AC input / Full range
- No load power consumption < 0.075W
- **Energy efficiency Level VI**
- Comply with EISA 2007/DoE and EU ErP
- Class II power (without earth pin)
- Protections: Short circuit / Overload / Over voltage
- Pass LPS
- Fully enclosed plastic case
- LED indicator for power on
- 2 years warranty



Interchangeable AC plug specifically for GE series



| TYPE | | | | | |
|-----------|-----------------|------------|---------------|------------|---------------|
| | Australian type | U.K type | European type | US type | Mix four type |
| ORDER NO. | AC plug-AU | AC plug-UK | AC plug-EU | AC plug-US | AC plug-MIX |

SPECIFICATION

| POWER SUPPLY MAIN BODY ORDER NO. | GE12I05-P1J | GE12I07-P1J | GE12I09-P1J | GE12I12-P1J | GE12I15-P1J | GE12I18-P1J | GE12I24-P1J | |
|---------------------------------------|--|--|-------------|-------------|-------------|-------------|-------------|------------|
| OUTPUT | SAFETY MODEL NO. | GE12I05 | GE12I07 | GE12I09 | GE12I12 | GE12I15 | GE12I18 | GE12I24 |
| | DC VOLTAGE <small>Note.2</small> | 5V | 7.5V | 9V | 12V | 15V | 18V | 24V |
| | RATED CURRENT | 2.0A | 1.33A | 1.33A | 1.0A | 0.8A | 0.83A | 0.625A |
| | CURRENT RANGE | 0 ~ 2.0A | 0 ~ 1.33A | 0 ~ 1.33A | 0 ~ 1.0A | 0 ~ 0.8A | 0 ~ 0.83A | 0 ~ 0.625A |
| | RATED POWER | 10W | 10W | 12W | 12W | 12W | 15W | 15W |
| | RIPPLE & NOISE (max.) <small>Note.3</small> | 50mVp-p | 75mVp-p | 100mVp-p | 120mVp-p | 150mVp-p | 180mVp-p | 240mVp-p |
| | VOLTAGE TOLERANCE <small>Note.4</small> | ±5.0% | ±5.0% | ±5.0% | ±3.0% | ±3.0% | ±3.0% | ±3.0% |
| | LINE REGULATION <small>Note.5</small> | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% |
| | LOAD REGULATION <small>Note.6</small> | ±5.0% | ±5.0% | ±5.0% | ±3.0% | ±3.0% | ±3.0% | ±3.0% |
| SETUP, RISE, HOLD UP TIME | 4000ms, 100ms, 30ms / 230VAC 4000ms, 100ms, 10ms / 115VAC at full load | | | | | | | |
| INPUT | VOLTAGE RANGE <small>Note.7</small> | 90 ~ 264VAC 135 ~ 370VDC | | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | | |
| | EFFICIENCY (Typ.) | 80% | 82% | 84% | 84% | 85% | 85% | 85.5% |
| | AC CURRENT | 0.4A / 100VAC 0.25A / 230VAC | | | | | | |
| | INRUSH CURRENT (max.) | COLD START 40A / 100VAC 80A / 230VAC | | | | | | |
| | LEAKAGE CURRENT (max.) | 0.25mA / 240VAC | | | | | | |
| PROTECTION | OVERLOAD | 110% ~ 200% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed | | | | | | |
| | OVER VOLTAGE | 115% ~ 135% rated output voltage Protection type : Clamp by zener diode | | | | | | |
| ENVIRONMENT | WORKING TEMP. | -10 ~ +50°C (Refer to "Derating Curve") | | | | | | |
| | WORKING HUMIDITY | 20% ~ 90% RH non-condensing | | | | | | |
| | STORAGE TEMP., HUMIDITY | -20 ~ +85°C, 10 ~ 95% RH | | | | | | |
| | TEMP. COEFFICIENT | ±0.03% / °C (0 ~ 30°C) | | | | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | | | | | | |
| SAFETY & EMC <small>(Note. 8)</small> | SAFETY STANDARDS | UL60950-1, CSA C22.2, TUV EN60950 -1, AS/NZS 60950.1, CCC GB4943 approved | | | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:4242VDC | | | | | | |
| | ISOLATION RESISTANCE | I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH | | | | | | |
| | EMC EMISSION | Compliance to EN55022, EN61000-3-2,3, FCC part15, GB9254, GB17625.1 | | | | | | |
| | EMC IMMUNITY | Compliance to EN61000-4-2,3,4,5,6,8,11, light industry level, criteria A | | | | | | |
| OTHERS | LIFE | 2 years : 100% load 30°C, 8 hours / day | | | | | | |
| | MTBF | 100Khrs min. MIL-HDBK-217F (25°C) | | | | | | |
| | DIMENSION | 70.7*40*38.8mm (L*W*H) | | | | | | |
| | PACKING | 97g ; 50pcs / 6.3kg / CARTON | | | | | | |
| DC OUTPUT CONNECTOR | PLUG | See page 2 ; Other type available by customer requested | | | | | | |
| | CABLE | See page 2 ; Other type available by customer requested | | | | | | |
| NOTE | <p>1. All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient.</p> <p>2. DC voltage: The output voltage set at point measure by plug terminal & 50% load.</p> <p>3. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.</p> <p>4. Tolerance: includes set up tolerance, line regulation, load regulation.</p> <p>5. Line regulation is measured from low line to high line at rated load.</p> <p>6. Load regulation is measured from 10% to 100% rated load</p> <p>7. Derating may be needed under low input voltage. Please check the derating curve for more details.</p> <p>8. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</p> <p>9. Main body unit and AC inlet plug should be ordered separately ; it needs to be used along with any of the AC inlet plug.</p> | | | | | | | |

Mechanical Specification

Unit:mm

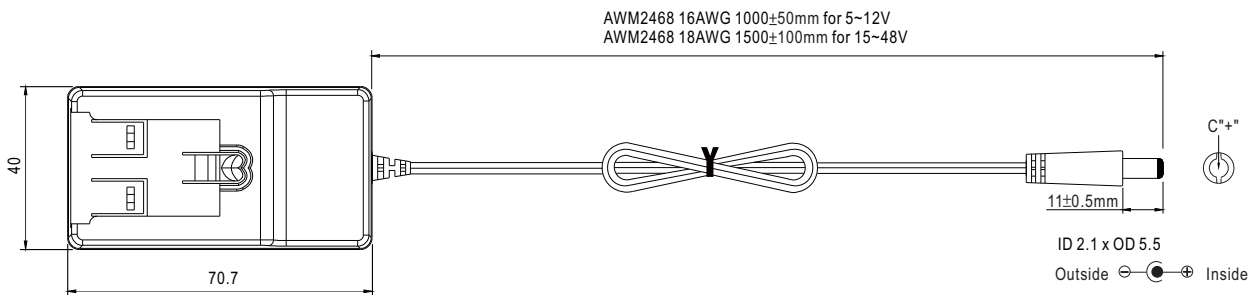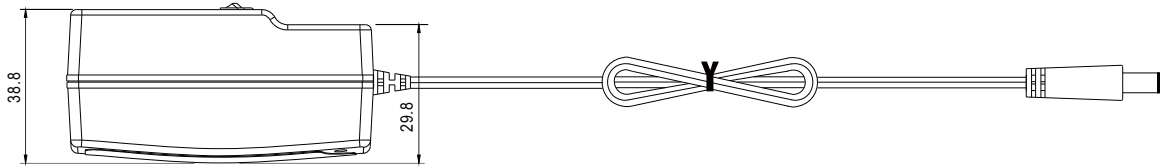


Plug Assignment

Standard plug: P1J

| P1J | |
|--------|--------|
| P/N | OUTPUT |
| CENTER | + |

Derating Curve

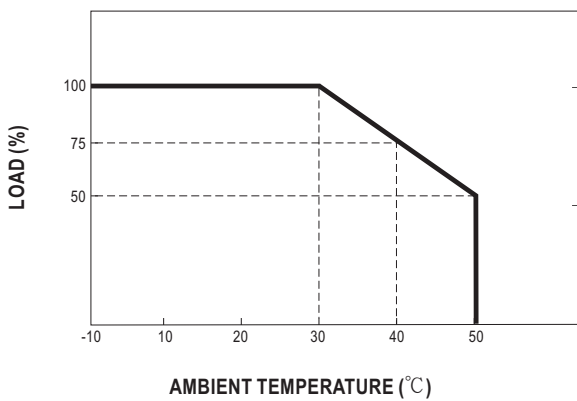

Static Characteristics

