

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










9615 SW Allen, Suite 103 Beaverton, OR 97005 Phone: (503) 643-4899 800-275-4899 Fax: (503) 372-1266 Website: www.cui.com

Specifications

1	Part No.	GF1207		
2	Nominal Size	120 mm. 5" inch		
3	Impedance	8Ω \pm 15% at 600 Hz. 1 V.		
4	Resonance	160 Hz.± 32 Hz. FO Hz. 1 V.		
5	S.P. Level	96 dB/w ± 2 dB 1 w. 50 cm. average at		
6	Response	fo Hz.∼ 8K Hz. MAX 10dB 500, 600, 800, 1K Hz.		
7	Crossover Freq.	Hz. Hz. dB/OCT Net work		
8	Input Power	Nominal Input 5 w. Handling Capacity 10 w.		
9	Operation	Must be normal at program source 5 w.		
10	Buzz, Rattle, etc.	Must be normal at sine wave 6.3 v.		
11	Flux Density	Gauss ± 10%		
12	Total Flux	Max well min		
13	Magnet	Size 60 x 32 x 8 mm gr oz		
14	Total Weight	gr oz		
15	Load Test	After test meet item 9 and 10 White noise 5 W. 48 Hours		
16	Distortion	% MAX Hz W.		
17	Heat Test	After test meet item 9 and 10 70±2 ±°C 20-50 %R.H. 48 Hours		
18	Humidity Test	After test meet item 9 and 10 40±2 ±°C 90-95 %R.H. 48 Hours		

PART NO.		UNITS:	
	GF1207		mm
DRAWN BY:		PAGE NO:	
			1 of 2

COPYRIGHT BY CUI INC.

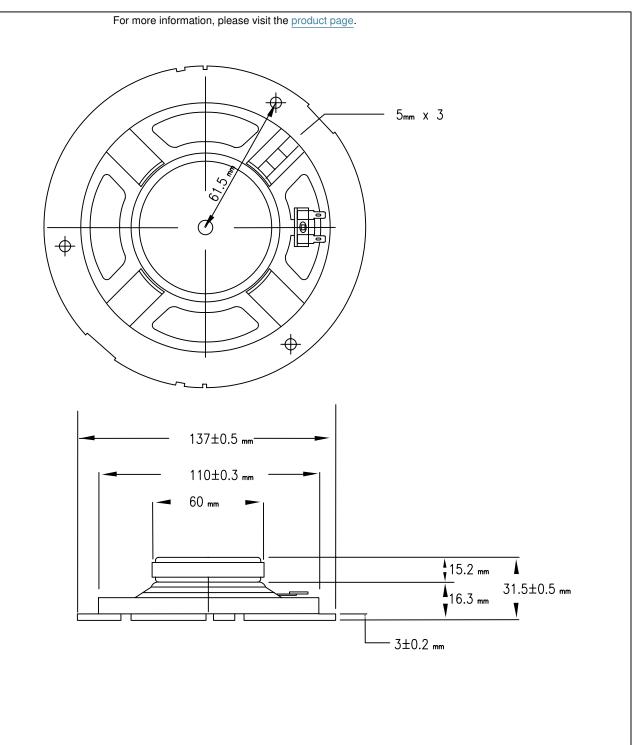



9615 SW Allen, Suite 103 Beaverton, OR 97005 Phone: (503) 643-4899 800-275-4899 Fax: (503) 372-1266 Website: www.cui.com

TITLE: PART NO. UNITS: GF1207 mm DRAWN BY: Page No. 2 of 2

COPYRIGHT 1997 BY CUI INC.