



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# Gap Filler 1500LV

Thermally Conductive, Liquid Gap Filler Material

## Features and Benefits

- Thermal Conductivity: 1.8 W/m-K
- Low volatility for silicone sensitive applications
- Ultra-conforming, with excellent wet-out
- 100% solids — no cure by-products
- Excellent low and high temperature chemical and mechanical stability

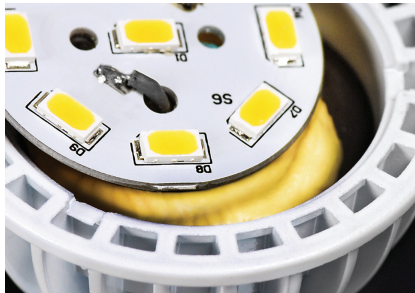

Gap Filler 1500LV is a two-part, high performance, thermally conductive, liquid gap filling material. This material offers the high temperature resistance and low modulus of a silicone material with significantly lower levels of silicone outgassing for use in silicone sensitive applications.

The mixed material will cure at room temperature and can be accelerated with the addition of heat. As cured, Gap Filler 1500LV provides a soft, thermally conductive, form-in-place elastomer that is ideal for fragile assemblies or for filling unique and intricate air voids and gaps.

Liquid dispensed thermal materials offer infinite thickness variations and impart little to no stress on sensitive components during assembly. Gap Filler 1500LV exhibits low level natural tack characteristics and is intended for use in applications where a strong structural bond is not required.

## Typical Applications:

- Lighting
- Automotive electronics
- Silicone sensitive applications

## TYPICAL PROPERTIES OF GAP FILLER 1500LV


PROPERTY	IMPERIAL VALUE	METRIC VALUE	TEST METHOD
Color / Part A	Yellow	Yellow	Visual
Color / Part B	White	White	Visual
Viscosity, High Shear (Pa-s) (1)	20	20	ASTM D5099
Density (g/cc)	2.7	2.7	ASTM D792
Mix Ratio	1:1	1:1	—
Shelf Life @ 25°C (months)	6	6	—
<b>PROPERTY AS CURED</b>			
Color	Yellow	Yellow	Visual
Hardness (Shore 00) (2)	80	80	ASTM D2240
Heat Capacity (J/g-K)	1.0	1.0	ASTM D1269
Siloxane Content, $\Sigma D_4-D_{10}$ (ppm)	<100	<100	—
Continuous Use Temp (°F) / (°C)	-76 to 392	-60 to 200	—
<b>ELECTRICAL AS CURED</b>			
Dielectric Strength (V/mil)	400	400	ASTM D149
Dielectric Constant (1000 Hz)	6.2	6.2	ASTM D150
Volume Resistivity (Ohm-meter)	10 <sup>10</sup>	10 <sup>10</sup>	ASTM D257
Flame Rating	V-O	V-O	UL 94
<b>THERMAL AS CURED</b>			
Thermal Conductivity (W/m-K)	1.8	1.8	ASTM D5470
<b>CURE SCHEDULE</b>			
Working Time @ 25°C (3)	120 min (2 hrs)	120 min (2 hrs)	—
Cure @ 25°C (hrs) (3)	8	8	—
Cure @ 100°C (min) (3)	10	10	—

1) Capillary Viscosity, 3000/sec, Part A and B measured separately.  
 2) Thirty second delay value Shore 00 hardness scale.  
 3) Parallel plate rheometer; see reactivity application note.

## Configurations Available:

- Supplied in cartridge or kit form

## Building a Part Number

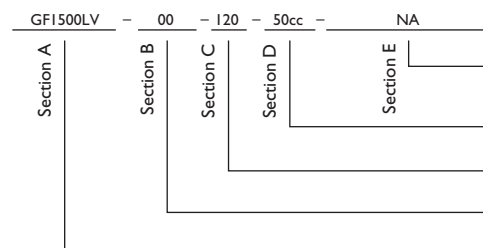

## Standard Options

◀ example

NA = Selected standard option. If not selecting a standard option, insert company name, drawing number, and revision level.

Cartridges: 50cc = 50.0cc, 400cc = 400.0cc  
 Kits: 1200cc = 1200.0cc, or 10G = 10 gallon

Pot Life: 120 = 120 minutes

00 = No spacer beads  
 07 = 0.007" spacer beads  
 10 = 0.010" spacer beads

GFI500LV = Gap Filler 1500LV Material

Note: To build a part number, visit our website at [www.bergquistcompany.com](http://www.bergquistcompany.com).



[www.bergquistcompany.com](http://www.bergquistcompany.com)

The Bergquist Company -  
 North American Headquarters  
 18930 West 78th Street  
 Chanhassen, MN 55317  
 Phone: 800-347-4572  
 Fax: 952-835-0430

The Bergquist Company -  
 European Headquarters  
 Netherlands  
 Phone: 31-35-5380684  
 Fax: 31-35-5380295

The Bergquist Company -  
 Asia Headquarters  
 Hong Kong  
 Phone: 852-2690-9296  
 Fax: 852-2690-3408

All statements, technical information and recommendations herein are based on tests we believe to be reliable, and THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MARKETABILITY AND FITNESS FOR PURPOSE. Sellers' and manufacturers' only obligation shall be to replace such quantity of the product proved to be defective. Before using, user shall determine the suitability of the product for its intended use, and the user assumes all risks and liability whatsoever in connection therewith. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE EITHER IN TORT OR IN CONTRACT FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL OR CONSEQUENTIAL, INCLUDING LOSS OF PROFITS OR REVENUE ARISING OUT OF THE USE OR THE INABILITY TO USE A PRODUCT. No statement, purchase order or recommendations by seller or purchaser not contained herein shall have any force or effect unless in an agreement signed by the officers of the seller and manufacturer.

PDS\_GFI1500LV\_0513