



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



GH04020B2A

Blue violet Laser Diode

Low Power Blue violet Laser Diode

■ Features

- (1) Wavelength : 406 nm(Typ.)
- (2) Optical power output :
CW 20mW
- (3) Φ 5.6mm CAN package

■ Applications

- (1) Barcode scanner
- (2) Laser sensor
- (3) other application

■ Absolute Maximum Ratings

(T_c=25°C^{※1})

Parameter	Symbol	Ratings	unit
※2 Optical power output(CW)	P _o	25	mW
Reverse voltage	Laser	V _{rl}	2 V
	Photo diode	V _{rd}	30 V
Operatings temperature(case temp.)	T _{opc(c)}	-10~+70	°C
Storage temperature	T _{stg}	-40~+85	°C
※3 Soldering temperature	T _{sld}	350	°C


※1 T_c : Case temperature

※2 CW :Continuous Wave Operation

※3 Soldering position is 1.6mm apart from bottom edge of the case.
(Immersion time: 3s)

■ Outline Dimensions

(Unit :mm)

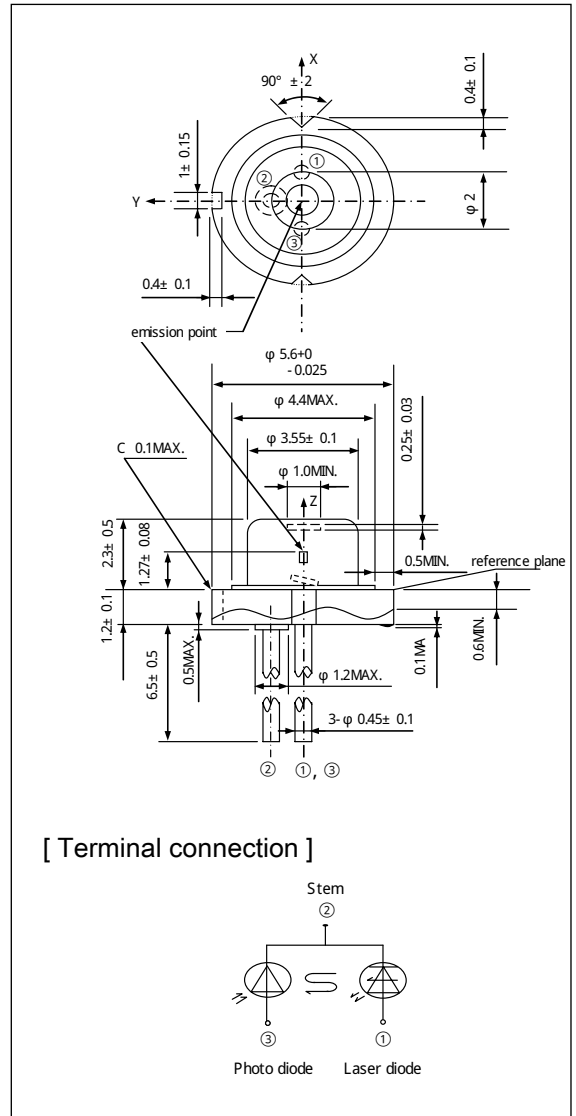

(Notice)

•In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

•Specifications are subject to change without notice for improvement.

■ Specifications

(T_c=25°C^{※1 ※2})

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	unit	
Threshold current	I _{th}	-	-	23	50	mA	
Operating current	I _{op}	P _o =20mW	-	38	60	mA	
Operating voltage	V _{op}		-	4.9	5.8	V	
Wavelength	λ _p		400	406	413	nm	
Half intensity angle ※3 ※4	Parallel		θ	6	9.5	12	°
	Perpendicular		θ _⊥	15	20	24	°
Misalignment angle ※4	Parallel		Δθ	-2.5	-	2.5	°
	Perpendicular		Δθ _⊥	-3.0	-	3.0	°
Differential efficiency	η _d		$\frac{12mW}{I(20mW)-I(8mW)}$	0.7	1.1	1.6	mW/mA
Monitor Photo diode current	I _m	P _o =20mW, V _{rd} =5V	0.3	0.6	0.9	mA	

※1 T_c : Case temperature

※2 Initial value, Continuous Wave Operation. Initial value is measured by the standard Laser tester of the sharp possession.

※3 Angle of 50% peak intensity.(Full angle at half-maximum)

※4 Parallel to the junction plane.(X-Z plane)


Perpendicular to the junction plane.(Y-Z plane)

(Notice)


•In the absence of confirmation by device specification sheets. SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

•Specifications are subject to change without notice for improvement.


■ Optical power output – Forward current

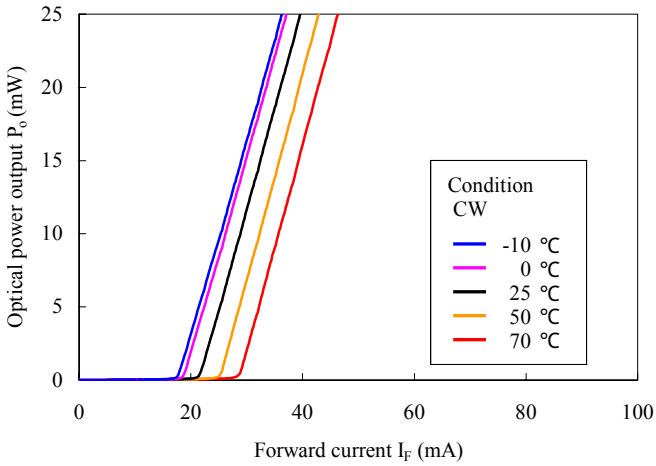


■ Forward voltage – Forward current

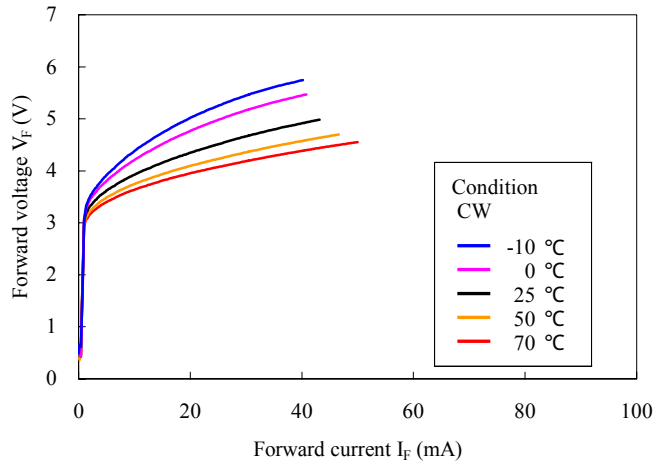


■ Case temperature dependence of threshold current(I_{th})

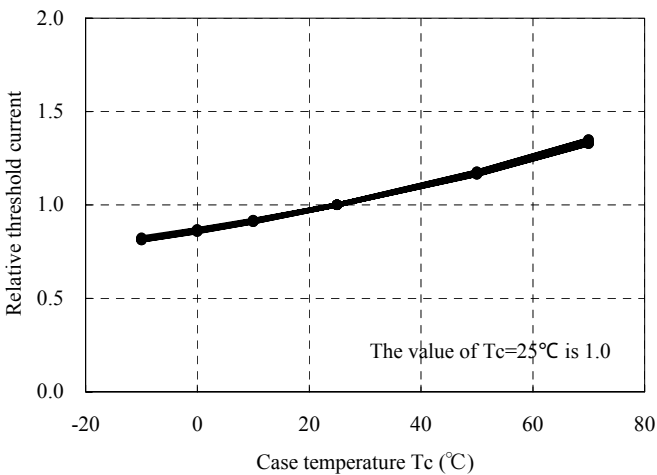


■ Case temperature dependence of operating current(I_{op})

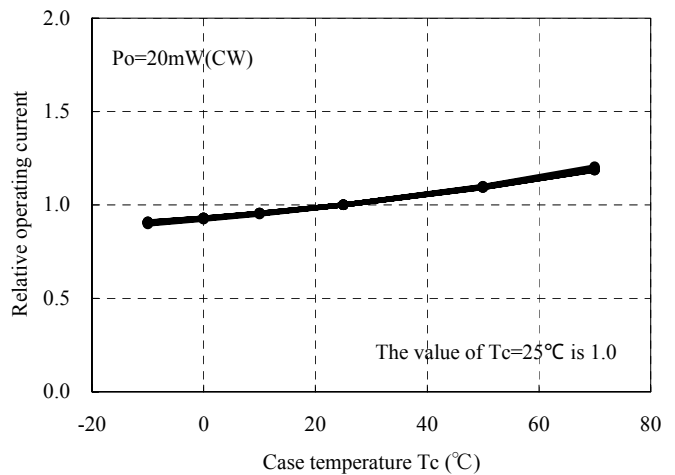

■ Case temperature dependence of operating voltage(V_{op})

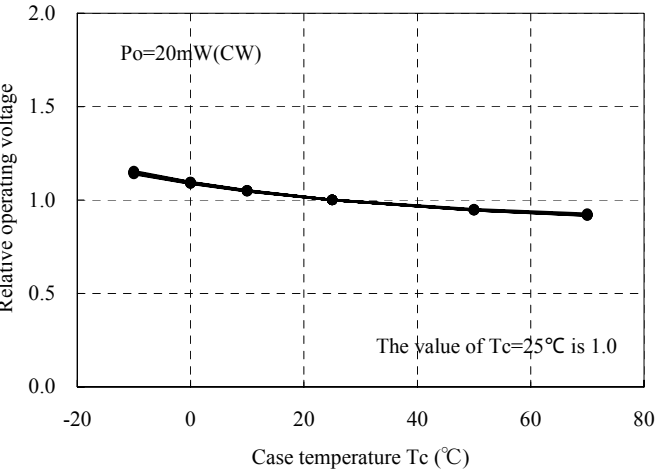


■ Case temperature dependence of monitor PD current(I_m)

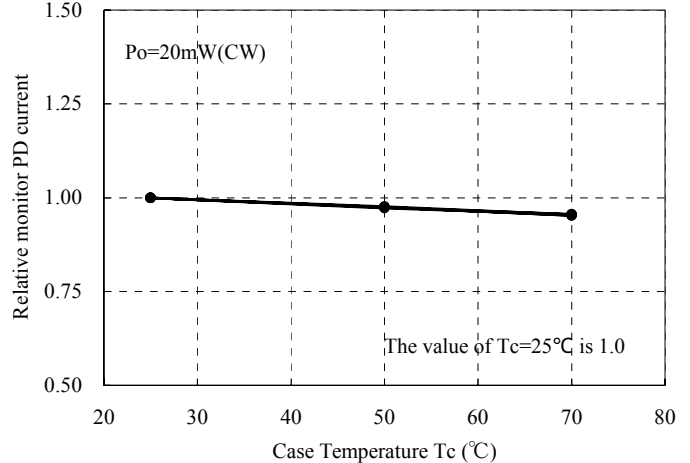


Note) Characteristics shown in diagrams are typical values.(not assurance value)


■ Case temperature dependence of wavelength

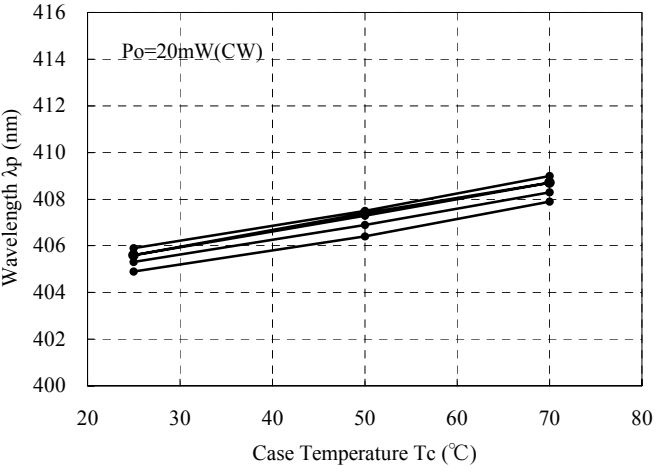

■ Optical power dependence of Lasing spectrum

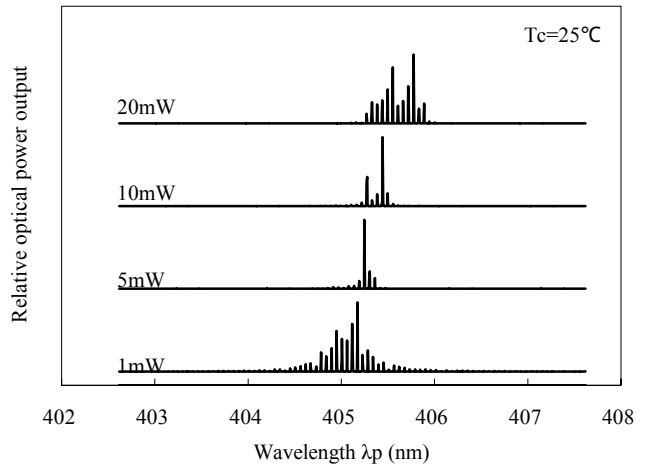

■ Far field pattern (FFP)

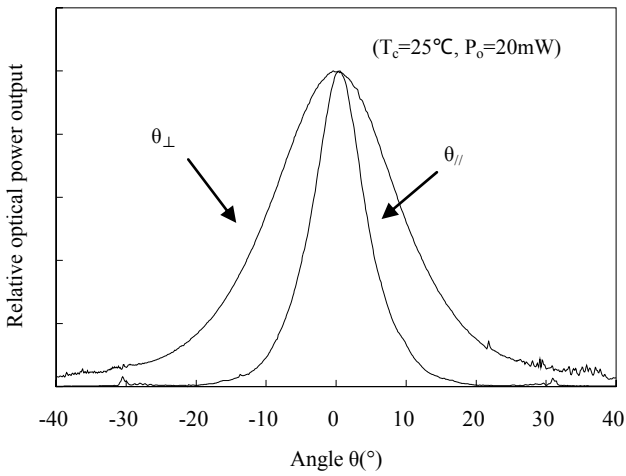

Note) Characteristics shown in diagrams are typical values.(not assurance value)

■ CAUTION

1. These technical sheets include materials protected under the copyright of Sharp Corporation ("Sharp"). Please do not reproduce or cause anyone to reproduce them without Sharp's consent.
2. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these technical sheets, as well as the precautions mentioned below. Sharp assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these technical sheets, and the precautions mentioned below.

(Precautions)

- (1) This products is designed for use in the following application areas;

* OA equipment * Audio visual equipment * Home appliance
* Telecommunication equipment (Terminal) * Measuring equipment
* Tooling machines * Computers

If the use of the product in the above application areas is for equipment listed in paragraphs (2) or (3), please be sure to observe the precautions given in those respective paragraphs.

- (2) Appropriate measures, such as fail-safe design and redundant design considering the safety design of the overall system and equipment, should be taken to ensure reliability and safety when this product is used for equipment which demands high reliability and safety in function and precision, such as ;

* Transportation control and safety equipment (aircraft, train, automobile etc.)
* Traffic signals * Gas leakage sensor breakers * Rescue and security equipment
* Other safety equipment

- (3) Please do not use this product for equipment which require extremely high reliability and safety in function and precision, such as ;

* Space equipment * Telecommunication equipment (for trunk lines)
* Nuclear power control equipment * Medical equipment

- (4) Please contact and consult with a Sharp sales representative if there are any questions regarding interpretation of the above three paragraphs.

3. Please contact and consult with a Sharp sales representative for any questions about this product.

(Notice)

•In the absence of confirmation by device specification sheets. SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

•Specifications are subject to change without notice for improvement.