



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



GLOBAL PERFORMANCE SWITCHERS

Features:

- Cost-effective power source
- Universal input 90-264 Vac
- 2-year warranty
- Single and multiple outputs
- Overload and overvoltage protection
- Built-in EMI filter
- UL1950, CSA-C22.2 No. 234 Level 3, IEC950 and EN60950
- Operation at no-load (single output models)
- RoHS Compliant (with G suffix)
- CE marked to LVD

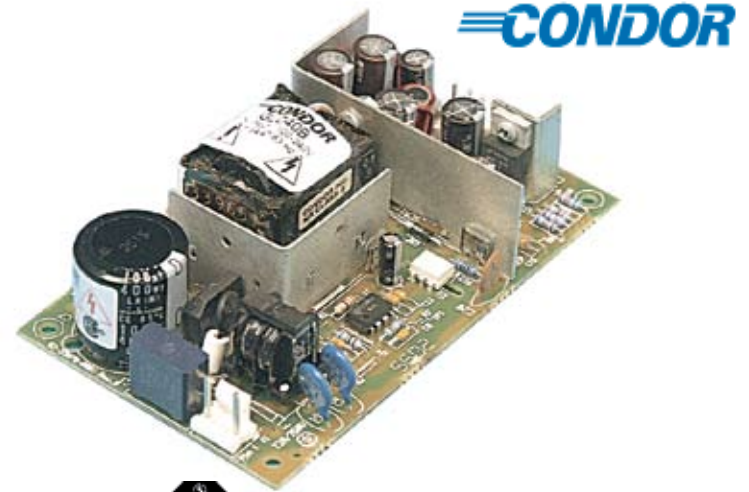

SPECIFICATIONS

<p>Ac Input 90-264 Vac, 47-63 Hz single phase.</p>	<p>Voltage Setting Factory set on standard units with fixed resistors for added reliability. 3.3 V unit has voltage adjustment pot.</p>												
<p>Input Current Maximum input current at 120 Vac, 60 Hz with full rated output load not to exceed 1.3 A.</p>	<p>Efficiency 70% typical depending on model.</p>												
<p>Output Power Normal continuous output power is 40 W for unrestricted natural convection cooling, 45 W peak for 60 seconds. During peak load conditions output regulation may exceed total regulation and noise limits.</p>	<p>Turn-on Time Less than 1 second at 120 Vac, 25°C (inversely proportional to input voltage and thermistor temperature).</p>												
<p>Output Regulation Regulation for multiple-output models measured by $\pm 40\%$ load change from 60% rated load with all other outputs at 60% full rated load and a line voltage change from low line to high line. Initial set tolerance is measured with all outputs at 60% of full rated load. Output voltage V1 requires 1 A load for proper regulation of multiple output models. Regulation for single-output models measured by changing from 5% to 50% load or 50% load to full load in either direction.</p>	<p>Input Protection Internal ac fuse provided on all units. Designed to blow only if a catastrophic failure occurs in the unit. Fuse does not blow on overload or short circuit.</p>												
<p>Power Limit Factory set to begin power limiting at approximately 55 W. Fully protected against short circuit and output overload. Short circuit protection is cycling type power limit.</p>	<p>Inrush Current Inrush limited by internal thermistors. Inrush at 240 Vac, averaged over the first ac half-cycle under cold start conditions will not exceed 37 A.</p>												
<p>Output Noise 0.5% rms, 1% pk-pk, 20 MHz bandwidth, mode. Measured with noise probe terminals of the power supply.</p>	<p>Temperature Coefficient 0.03%/°C typical on all outputs.</p>												
<p>Transient Response Main Output: 500 μs typical response time for return to within 0.5% of final value for a 50% load step change, $\Delta I / \Delta t < 0.2$ A/μs. Maximum voltage deviation is 3.5%. Startup/ shutdown overshoot less than 3%.</p>	<p>EMI/EMC Compliance All models include built-in EMI filtering to meet the following emissions requirements:</p> <table border="1"> <thead> <tr> <th>EMI SPECIFICATIONS</th> <th>COMPLIANCE LEVEL</th> </tr> </thead> <tbody> <tr> <td>Conducted Emissions</td> <td>EN55022 Class A; FCC Class A</td> </tr> <tr> <td>Static Discharge</td> <td>EN61000-4-2, 6 kV contact, 8 kV air</td> </tr> <tr> <td>RF Field Susceptibility</td> <td>EN61000-4-3, 3 V/meter</td> </tr> <tr> <td>Fast Transients/Bursts</td> <td>EN61000-4-4, 2 kV, 5 kHz</td> </tr> <tr> <td>Surge Susceptibility</td> <td>EN61000-4-5, 1 kV diff., 2 kV com.</td> </tr> </tbody> </table>	EMI SPECIFICATIONS	COMPLIANCE LEVEL	Conducted Emissions	EN55022 Class A; FCC Class A	Static Discharge	EN61000-4-2, 6 kV contact, 8 kV air	RF Field Susceptibility	EN61000-4-3, 3 V/meter	Fast Transients/Bursts	EN61000-4-4, 2 kV, 5 kHz	Surge Susceptibility	EN61000-4-5, 1 kV diff., 2 kV com.
EMI SPECIFICATIONS	COMPLIANCE LEVEL												
Conducted Emissions	EN55022 Class A; FCC Class A												
Static Discharge	EN61000-4-2, 6 kV contact, 8 kV air												
RF Field Susceptibility	EN61000-4-3, 3 V/meter												
Fast Transients/Bursts	EN61000-4-4, 2 kV, 5 kHz												
Surge Susceptibility	EN61000-4-5, 1 kV diff., 2 kV com.												
<p>Overvoltage Protection Built in on V1 with firing point set per table. OVP firing reduces output #1 and #2 to less than 50% of nominal voltage in 50 ms.</p>	<p>Safety All GLC40 models are approved to UL1950, CSA-C22.2 No. 234 Level 3, IEC950 and EN60950. Class I input.</p>												

Commercial Model	Output No.	Output	Output Minimum	Output Maximum	V 1 OVP Set	Noise P-P	Total Regulation
GLC40AG	1	+ 5.1 V	1 A	3 A	+ 6.2 ± 0.6 V	50 mV	2%
	2	+ 12 V	0 A	2 A		120 mV	6%
	3	- 12 V	0 A	0.4 A		120 mV	5%
GLC40BG	1	+ 5.1 V	1 A	3 A	+ 6.2 ± 0.6 V	50 mV	2%
	2	+ 15 V	0 A	1.5 A		150 mv	6%
	3	- 15 V	0 A	0.4 A		150 mV	5%
GLC40DG	1	+5 V	1 A	3 A	+ 6.2 ± 0.6 V	50 mV	2%
	2	+24 V	0 A	1 A		240 mV	6%
	3	-12 V	0 A	0.4 A		120 mV	5%
GLC40-3.3G	1	3.3 V	0 A	8 A	4.2 ± 0.6 V	33 mV	2%
GLC40-5G	1	5 V	0 A	8 A	6.2 ± 0.6 V	50 mV	2%
GLC40-9G	1	9 V	0 A	4.4 A	11 ± 0.9 V	90 mV	2%
GLC40-12G	1	12 V	0 A	3.3 A	14 ± 1.1 V	120 mV	2%
GLC40-13.8G	1	13.8 V	0 A	2.9 A	17.7 +/- 1.5 V	138 mV	2%
GLC40-15G	1	15 V	0 A	2.7 A	18.5 ± 1.5 V	150 mV	2%
GLC40-24G	1	24 V	0 A	1.7 A	28.5 ± 2.5 V	240 mV	2%
GLC40-28G	1	28 V	0 A	1.4 A	34 ± 2.8 V	280 mV	2%

GLC40 MECHANICAL SPECIFICATIONS

J1 CONNECTOR: AMP P/N 640445-3
W/CENTER PIN REMOVED,
0.156 [3.96mm] CTR HEADER

J2 CONNECTOR: AMP P/N 640445-6,
0.156 [3.96mm] CTR HEADER

INPUT: J1 PIN 1) AC LINE
PIN 2) AC NEUTRAL
GND

OUTPUT:

J2	MULTI OUTPUT MODELS	SINGLE OUTPUT MODELS
PIN 1	OUTPUT #2	OUTPUT #1
PIN 2	OUTPUT #1	OUTPUT #1
PIN 3	OUTPUT #1	OUTPUT #1
PIN 4	COMMON	COMMON
PIN 5	COMMON	COMMON
PIN 6	OUTPUT #3	COMMON

MATING CONNECTORS AMP P/N

	HOUSING	CONTACT
INPUT	640250-3	770476-1
OUTPUT	640250-6	770476-1

NOTE: 5A MAXIMUM RECOMMENDED CURRENT PER CONNECTOR PIN

OPTIONAL ENCLOSURE (P/N 08-30466-1040)

WEIGHT: 1.0 LBS MAX. [0.45 kg MAX.]

TOLERANCES: X.XX=0.030 [0.76mm]
X.XXX=0.010 [0.25mm]

