



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Issued on Jun. 10, 2002

Sales & Marketing Group

-Electronic Components & Devices

Model GP1FP513TK/GP1FP513RK

Integrated Electric Jack, Square Type Optical Connector (Fiber-Optic Transmitter and Receiver)

Features

- An electric jack and an optical connector have been packaged together
Thin package makes it possible to reduce the mounting cost
- Double-speed transmission that supports the input/output of high-definition audio signals from DVD players/AV amplifiers is possible
Transmission speed: MAX. 13.2 Mbps
- With a shutter mechanism

Applications

- DVD players • Stereos • AV amplifiers
- Digital TVs • STBs • Personal computers

Specifications



GP1FP513TK (Fiber-optic transmitter)

Parameter	Symbol	Characteristics
Operating voltage	Vcc	4.75 to 5.25 V
Dissipation current	Icc	MAX. 13 mA
Peak emission wavelength	λ_p	TYP. 660 nm
Optical power output coupling with fiber	Pc	MIN. -21 dBm
Operating transfer rate	T	MAX. 13.2 Mbps
Jitter	tj	TYP. 1 ns
Operating temperature	Topr	-20 to +70 °C


GP1FP513RK (Fiber-optic receiver)

Parameter	Symbol	Characteristics
Operating voltage	Vcc	4.75 to 5.25 V
Dissipation current	Icc	MAX. 25 mA
Minimum received optical power	PCMIN	MAX. -24 dBm
Operating transfer rate	T	MAX. 13.2 Mbps
Jitter	tj	TYP. 1 ns
Operating temperature	Topr	-20 to +70 °C



Outline Dimensions (Unit: mm)

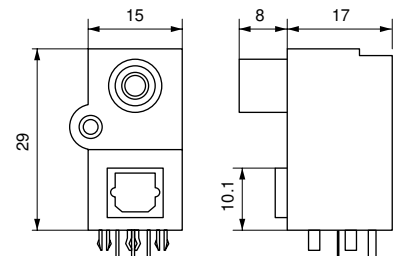


Transmitting-side internal connection diagram



Receiver-side internal connection diagram

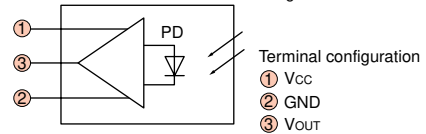

Line-up of Optical Fiber Transmitter and Receiver

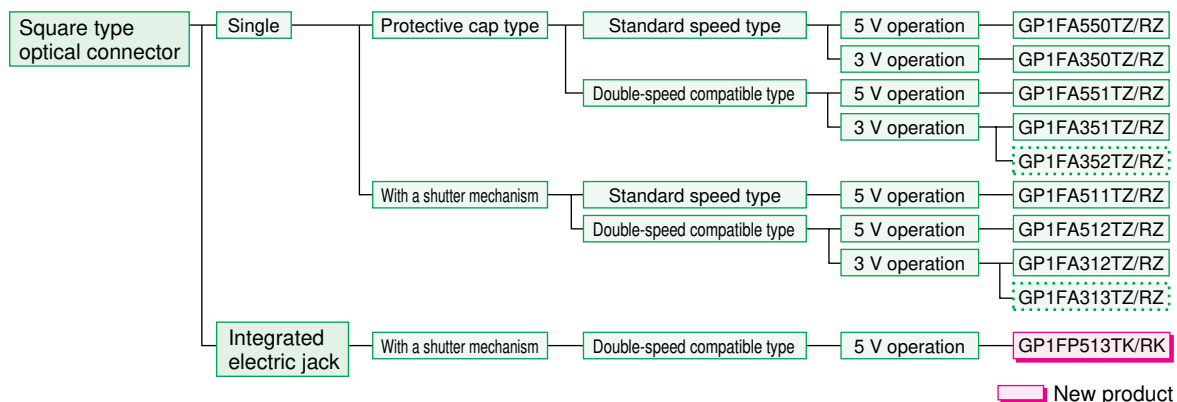

■ New product

Notice:

- In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP devices.
- Specifications, model names and availabilities are subject to change without notice for improvement.