

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








Rating	20A 125VAC 10A 250VAC 16A 125VAC 3/4HP 5\(\)_US	Mounting Hole			Circuit	Diagram
	16A 125VAC 3/4HP 27\u00e4\u00e	H	Y			
Contact Resistance	50m ohm Max.	×			•	.
Insulation Resistance	DC 500V 100M ohm Min.					
Dielectric Strength	AC 1500V 1 minute	Thickness(mm)	X(mm)	Y(mm)	3	2 1
Operation Temperature	-20°~+85°	0.75~1.25	01.0.01	36.6 + 0.2		
Switch Function	3P SPDT ON-(ON)	1.25~2.0 2.0~3.0	21.2+0.1	36,8±0,2 37,0±0,2		

()= Momentary Function




* MATERIAL:


Frame: Nylon 66, Black

Actuator: Nylon 66 with 33%GF, Black

Printed: None

Water proof and dust proof to fit IP-56

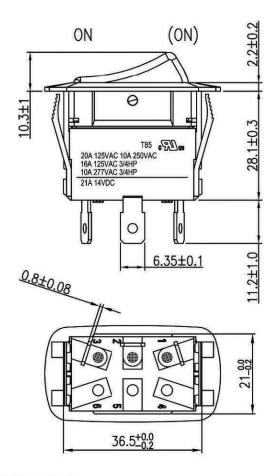

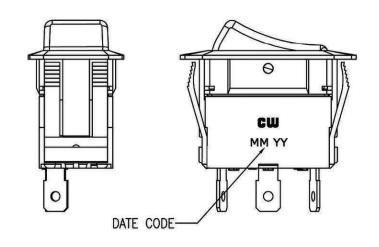

RoHS Compliant

INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 1/24/11

/24/11 Rev. 1 Unit: mm Checked By:

ROCKER SWITCH

CW P/N: GRB260I601BBNN

G.Guld

1 20A 125VAC 10A 250VAC was 20A 125VAC 10A 25VAC IN RATING. 1/24/11.