



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





■ Features :

- Universal AC input / Full range
- 2 pole USA plug
- No load power consumption <0.075W
- **Energy efficiency Level VI**
- Comply with EISA 2007/DoE
- Compact size
- Class II power (without earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Pass LPS
- 100% full load burn-in test
- Fully enclosed plastic case
- Low cost, high reliability
- 2 years warranty




SPECIFICATION


ORDER NO.		GS05U-USB
OUTPUT	SAFETY MODEL NO.	GS05U
	DC VOLTAGE Note.2	5V
	RATED CURRENT	1.00A
	CURRENT RANGE	0 ~ 1.00A
	RATED POWER	5W
	RIPPLE & NOISE (max.) Note.3	90mVp-p
	VOLTAGE TOLERANCE Note.4	±4.0%
	LINE REGULATION Note.5	±1.0%
	LOAD REGULATION Note.6	±4.0%
SETUP, RISE, HOLD UP TIME	1500ms, 20ms, 15ms at full load	
INPUT	VOLTAGE RANGE	90 ~ 264VAC 127 ~ 370VDC
	FREQUENCY RANGE	47 ~ 63Hz
	EFFICIENCY (Typ.)	74%
	AC CURRENT	0.15A / 100VAC
	INRUSH CURRENT (max.)	35A / 230VAC
	LEAKAGE CURRENT(max.)	0.25mA / 240VAC
PROTECTION	OVERLOAD	105 ~ 135% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed
	OVER VOLTAGE	105 ~ 160% rated output voltage, detect on main control IC Protection type : Hiccup mode, recovers automatically after fault condition is removed
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down
ENVIRONMENT	WORKING TEMP.	-20 ~ +50°C (Refer to "Derating curve")
	WORKING HUMIDITY	20% ~ 90% RH non-condensing
	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 40°C)
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes
SAFETY & EMC (Note. 7)	SAFETY STANDARDS	UL60950-1, CSA C22.2 approved
	WITHSTAND VOLTAGE	I/P-O/P:4242VDC
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH
	EMI CONDUCTION & RADIATION	Compliance to FCC part 15 Class B
OTHERS	MTBF	1100Khrs min. MIL-HDBK-217F(25°C)
	DIMENSION	41.86*32.76*23.8mm (L*W*H)
	PACKING	26g ; 102pcs / 5Kg / CARTON
CONNECTOR	PLUG	USB Type A
NOTE	<p>1.All parameters are specified at 115VAC input, rated load, 25°C 70% RH ambient. 2.DC voltage: The output voltage set at point measure by plug terminal & 50% load. 3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor. 4.Tolerance: includes set up tolerance, line regulation, load regulation. 5.Line regulation is measured from low line to high line at rated load. 6.Load regulation is measured from 0% to 100% rated load 7.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</p>	

■ Mechanical Specification

Unit:mm

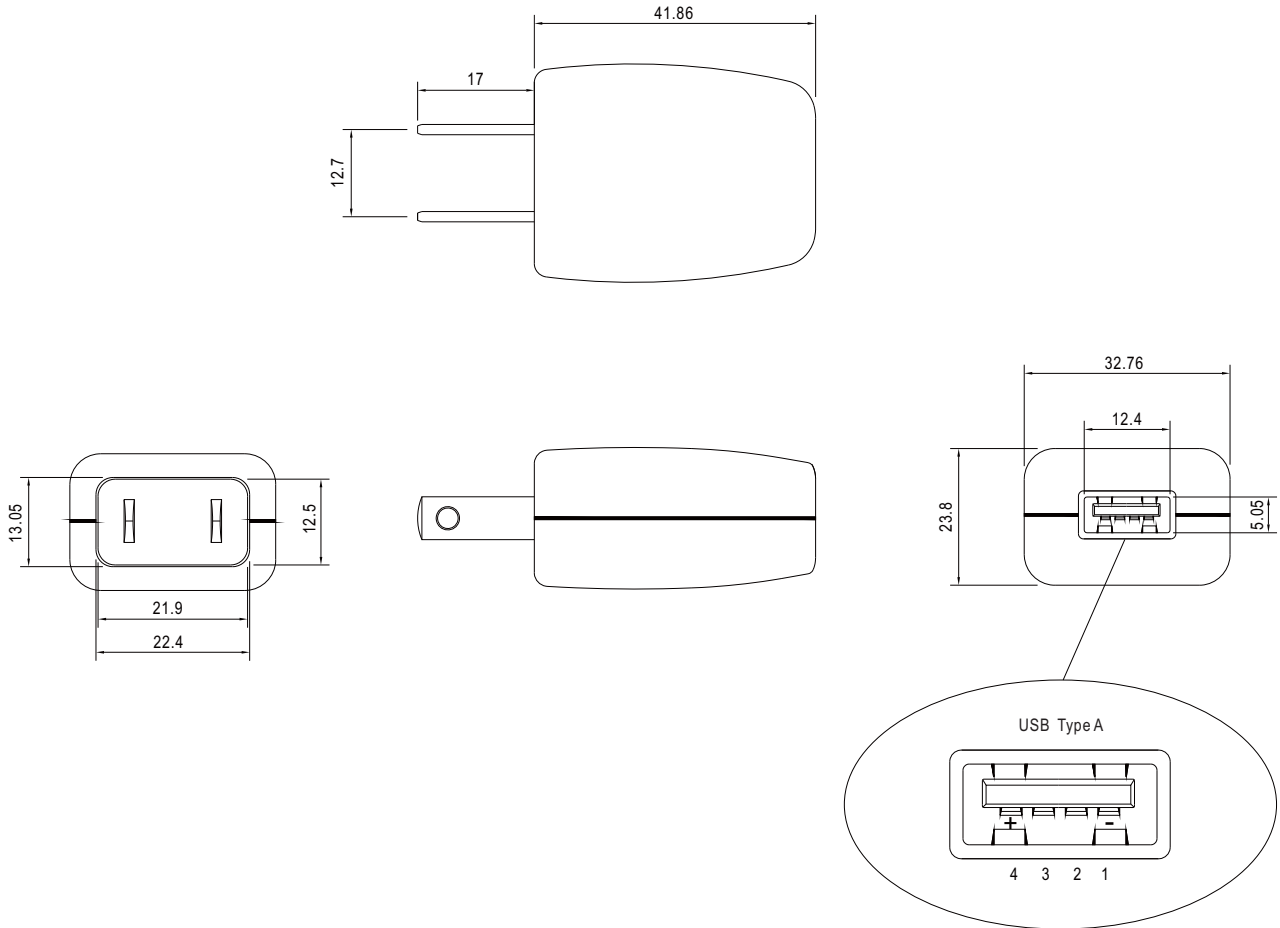

■ Derating Curve

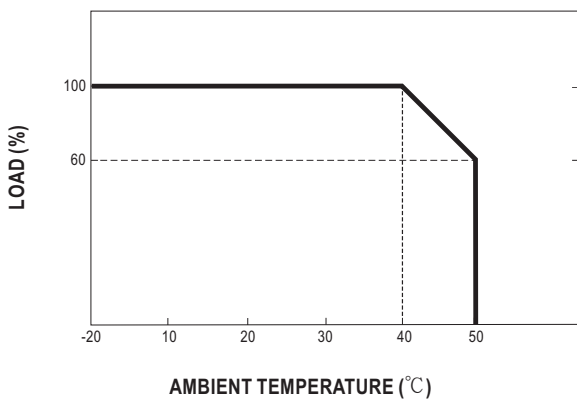

■ Static Characteristics

