



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






# GainSpan GS1011M EVK Mrk II Evaluation Kit


## PRODUCT OVERVIEW

The GS1011M EVK Mrk II Evaluation Kit provides GainSpan customers the means to evaluate capabilities of the GS1011 ultra-low power wireless system-on-a-chip and the Serial-to-WiFi embedded software for Wi-Fi networks. The Serial-to-WiFi embedded software allows devices and appliances manufacturers to easily add Wi-Fi capabilities to their products with minimal impact on host microcontroller firmware.

The GS1011M EVK Mrk II Evaluation Kit provides all the hardware and software necessary to quickly set up a serial (UART or SPI) based link to a PC or external microcontroller. In order to evaluate the ease of adding secure Wi-Fi communications to a product using the GainSpan AT command set, the kit includes all the software tools necessary for configuration of Serial-to-Wi-Fi and GS1011M modules, data transfer using "AT" command-set and protocol analyzer for validation of packet & frame fields. For additional details on the module features, please refer to the GS1011M module product briefs.

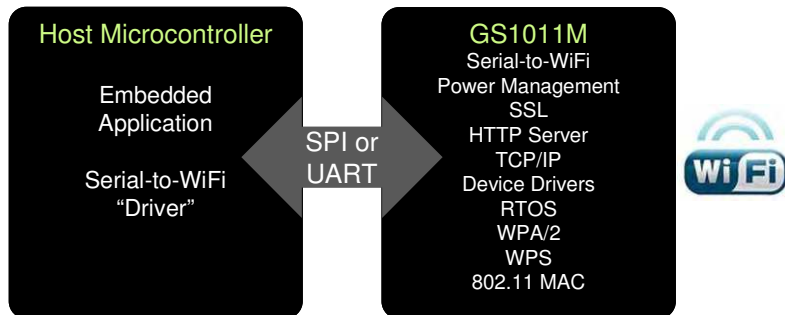

The GS1011M EVK Mrk II Evaluation Kit enables GainSpan customers to develop software on their existing microcontrollers to support the "AT" command set, and connect it to either the UART or SPI interface on the evaluation kit reference board.

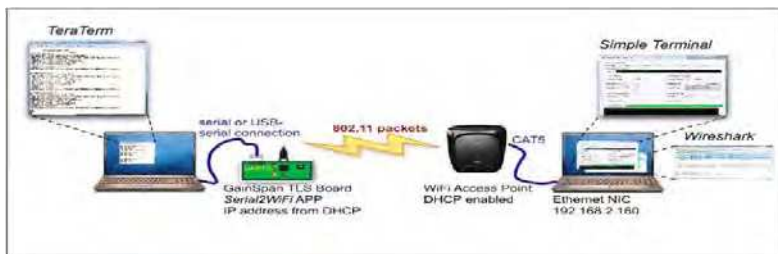

## BENEFITS:

- **GS1011M highly integrated ultra- low power 802.11b Wi-Fi radio Family of modules**
- **Easy integration of Wi-Fi and web connectivity to devices with existing microcontroller and UART or SPI interface**
- **Easy device provisioning through Limited-AP (embedded web pages) or Wi-Fi Protected Set-up (WPS)**
- **Serial to Wi-Fi firmware allows easy addition of Wi-Fi capabilities to embedded system**
- **Offloads Wi-Fi and TCP/ IP networking from smaller host microcontrollers**
- **Simple AT commands for configuration and data communication**
- **Support for over the air firmware updates using external flash**

## FEATURES:

- **Supports Infrastructure, Limited AP and Adhoc networking**
- **Two UART and SPI ports. Clock Data rates are**
  - **UART: up to 921 Kbps**
  - **SPI: up to 3 Mbps**
- **Push button for Alarms and Firmware Restore from External Flash**
- **Full Wi-Fi and networking stack services including TCP/UDP/IP, DNS, DHCP, HTTP and SSL**
- **Wi-Fi Security**
  - **WEP, WPA/WPA2 Personal**
  - **WPA/WAP2 Enterprise**
  - **Wi-Fi Protected Setup (WPS 2.0)**
- **Power Save Modes – PS-Poll, Sleep, Deep Sleep, Standby**



### AT COMMAND SET

The 'AT' command set supports the full range of capabilities provided by the underlying GainSpan network services software that abstract the complexity of IP networking and Wi-Fi communication from the embedded application, allowing complete control.

Types	Commands
<b>Serial Interface Configuration</b>	Set Serial Parameters (baud rate, flow control)
<b>Profile Management</b>	Load/Save/Restore profiles
<b>Wi-Fi Interface</b>	Scan/associate/disassociate
<b>Security</b>	Enable/set security
<b>Network Management</b>	Static or DHCP client/server, DNS client/server
<b>Connection management</b>	UDP/TCP/HTTP client/server
<b>Power management</b>	Enable/disable PS-Poll, deep sleep and standby
<b>Services</b>	Upgrade firmware

### EVALUATION BOARD SPECIFICATIONS

Feature	Description
<b>Radio Protocol</b>	IEEE 802.11b (IEEE 802.11 b/g/n Compatible)
<b>RF Module</b>	GS1011M Ultra-Low Power Module Family (GS1011MIP, GS1011MIE, GS1011MEP, GS1011MEE)
<b>RF Output Power (Typical)</b>	8 dBm (GS1011Mlx), 18 dBm (GS1011MEx)
<b>Radio Frequency</b>	2.412 – 2.484 GHz
<b>Antenna Type</b>	PCB Trace (GS1011MxP) or u.FL connector for external antenna (GS1011MxE)
<b>I/O Port</b>	6-pin serial UART interface, 15540 compatible; DB9 RS232 Connector; SPI
<b>Power Source</b>	1.5 V Lithium Batteries (2x) or External Power Adapter
<b>GS1011M Firmware</b>	Serial to Wi-Fi (default); Temperature and light sensor (TLS) Application
<b>Dimensions</b>	3.5 in X 3.0 in (includes module and RS232 connector)

### EVALUATION KIT CONTENTS

ITEM	Description
<b>GS1011M Evaluation Board</b>	Evaluation board based on low power GS1011M module
<b>USB Memory Stick</b>	Installation software for firmware, Documentation, Tools and Utilities
<b>Batteries</b>	Two 1.5V Lithium AA Batteries
<b>Wi-Fi Access Point</b>	Off the Shelf Wi-Fi Access Point for out of box functionality
<b>Cable</b>	6-pin serial UART to USB cable to connect to host PC
<b>Software Tools</b>	TeraTerm --- Open Source Serial Terminal Emulator Wireshark --- Open Source, Network Protocol Analyzer GSDemo – GainSpan tool to demonstrate TLS application GS Flash Program --- GainSpan tool for Firmware Upgrade
<b>Documentation</b>	Quick Start Guide, Programmers Guide, Schematics

### EVALUATION KIT ORDERING INFORMATION

ITEM	PART NUMBER	Description
<b>GS1011M EVK Mrk II Evaluation Kit</b>	GS1011MIP-EVK2-S2W-WEB GS1011MEP-EVK2-S2W-WEB GS1011MIE-EVK2-S2W-WEB GS1011MEE-EVK2-S2W-WEB	Serial to Wi-Fi Evaluation kit based on the ultra-low power GS1011M module base board. The Serial to Wi-Fi firmware supports embedded web-server for provisioning