



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




GU140X16J-7000B

SIMPLIFIED DATASHEET

Features

VFD module larger than GU140X16G, using a larger VFD. Choose this if the number of dots is sufficient, but a larger display is desired.

Physical dimension

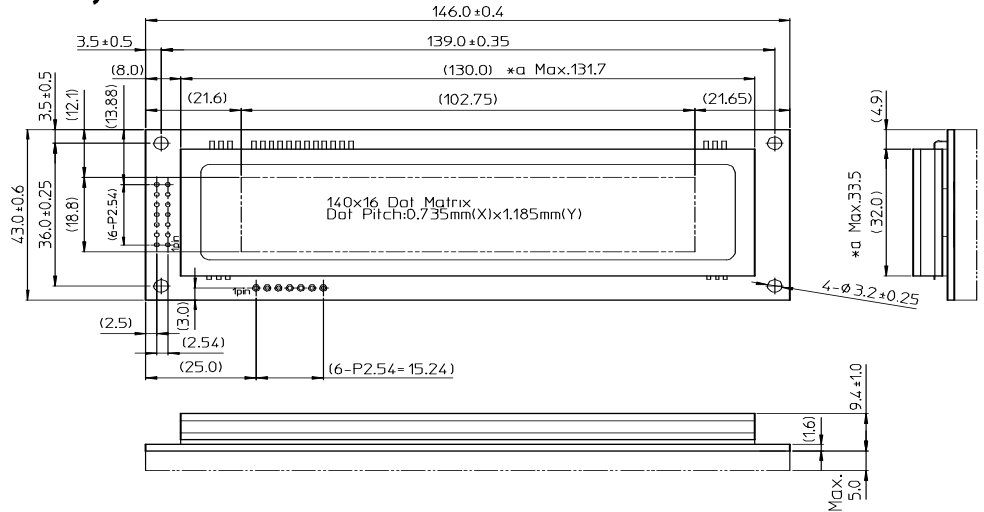

Get full specification



Click here to go to request form.

Specifications

Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	VCC	4.75	5.00	5.25	VDC	-

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
'L' Logic Input Current						
D0-D7, /WR, /RD	IIL1	-	-	-0.15	mA	VIN=0V
/RESET	IIL2	-	-	-0.6	mA	VIN=0V
'H' Logic Input Current						
D0-D7, /WR, /RD, /RESET	IiH	-	-	1.0	μADC	VIN=5V
Logic Input Voltage	VIH	0.8VCC	-	VCC	VDC	-
D0-D7, /WR, /RD, /RESET	VIL	0	-	0.2VCC	VDC	-
Logic Output Voltage	VOH	3.8	-	VCC	VDC	I _{OH} =-1.5mA
D7(Busy flag), PBUSY	VOL	0	-	0.6	VDC	I _{OL} =1.6mA
Logic input resistance						
SIN	RIN	3	-	-	KΩ	-
Logic Input Voltage	VIH	3.0	-	+15	VDC	-
SIN	VIL	-15	-	0.5	VDC	-
Logic Output Voltage	VOH	4.0	-	VCC	VDC	RL=3KΩ
SBUSY	VOL	0	-	0.5	VDC	RL=3KΩ
Power Supply Current 1	ICC-1	-	500	650	mADC	All dots ON
Power Supply Current 2	ICC-2	-	390	510	mADC	All dots OFF
Power Supply Current 3	ICC-3	-	25	35	mADC	Display power OFF
Power Consumption		-	2.50	3.25	W	All dots ON

Optical Specifications

Parameter	
Luminance	350 cd/m ² Min. (1000 cd/m ² Typ.)
Color of illumination	Green (Blue-Green)

Environmental Specifications

Parameter	
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-60 ~ +85 degrees (Under 168 hours)/-40 ~ +85 degrees (Or more)
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Storage Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (non-operating)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	392m/s ² (40G) 9ms X-Y-Z, 3 times each direction

Physical Specifications

Parameter	
Number of Dots	2,240 (140 x 16)
Display Area	102.75 mm x 18.80 mm
Dot Size (X x Y)	0.585 mm x 1.025 mm
Dot Pitch (X x Y)	0.735 mm x 1.185 mm
Weight	About 74 g

Interface

Parallel(CMOS), Asynchronous Serial (RS232)

Pin Assignment (Parallel)

Pin No.	Signal	Pin No.	Signal
1	GND	2	VCC
3	NC	4	RS
5	/WR	6	/RD
7	D0	8	D1
9	D2	10	D3
11	D4	12	D5
13	D6	14	D7(PBUSY)

(Asynchronous Serial)

Pin No.	Signal	Baud Rate Setting
1	VCC	9600bps
2	SIN	19200bps
3	GND	38400bps*
4	SBUSY	115200bps
5	NC	(*:Default setting)
6	/RESET	
7	NC	

Selectable Font

Parameter		* ANK(Alphabet, Numeric, Kana)
Character font type	5 x 7	ANK, International
Character width	Fixed/Proportional	character format 1&2
Character numbers	20 x 2 by 5 x 7 dot ASCII	
	23 x 2 by 5 x 7 dot Proportional	

Functions

Parameter	
Control command	
Scroll display action	
Proportional Font function	
User-Window function	
AND/OR/XOR Mixture display	
Reverse display	
Dot unit real-time bit image display	
Download character function	
Font Magnification function	
etc.	