



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Dot Graphic VFD Module

GU280x16G-7002

- ❑ 280x16 Dot Graphic
- ❑ Single 5V Supply
- ❑ High Brightness Blue Green Display
- ❑ Operating Temp -40°C to +85°C
- ❑ 11 Multi Sized Fonts
- ❑ High Speed 8 Bit Parallel Interface
- ❑ Async. & Sync. Serial Interface

The module includes the Vacuum Fluorescent Display glass, VF drivers and micro-controller ICs with refresh RAM, character generator and interface logic. The high speed 8 bit parallel interface is 5V TTL/CMOS compatible suitable for connection to a host CPU bus. The asynchronous serial interface accepts baud rates up to 115,200 with none parity. The module is ready to receive ASCII characters without initialization commands.

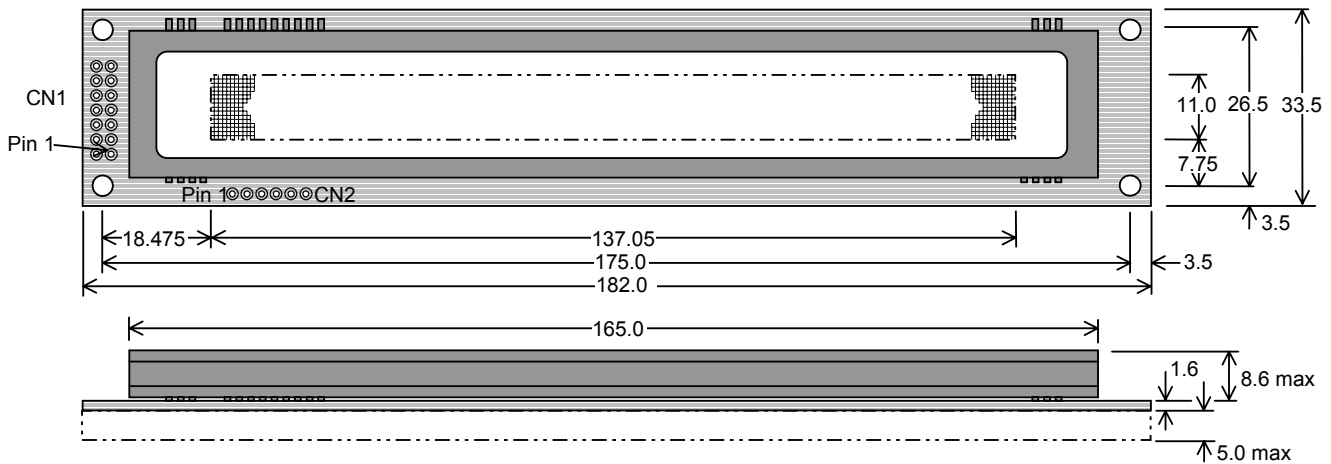

Dimensions in mm & subject to tolerances. Mounting holes 3.5mm dia.

ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Condition
Power Supply Voltage	VCC	5.0VDC +/- 5%	GND=0V
Power Supply Current	ICC	290mADC typ.	VCC=5V
Logic High Input	VIH	0.8VDC min. Vcc max.	VCC=5V
Logic Low Input	VIL	0VDC min. 0.2VDC max.	VCC=5V
Logic High Output	VOH	3.8VDC min. Vcc max.	IOH = -1.5mA
Logic Low Output	VOL	0VDC min. 0.6VDC max.	IOL =1.6mA

The power on rise time should be less than 100ms. Inrush current at power on can be 2 x ICC.

OPTICAL and ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
Display Area (XxY mm)	137.05 x 11.00
Dot Size/Pitch (XxY mm)	0.34 x 0.5 / 0.49 x 0.7
Luminance	500 cd/m ² Typ.
Colour of Illumination	Blue-Green (Filter for colours)
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Operating Humidity (non condensing)	20 to 80% RH @ 25°C

SOFTWARE COMMANDS – Popular codes, more included

Command	Code
Write Character to Display	20H-FFH
BS, HT, LF, CR, Display Clear	08H, 09H, 0AH, 0DH, 0CH
Initialize Display	1BH 40H
Specify International Font	1BH 52H n
Vertical Scroll Mode	1FH 02H
Horizontal Scroll Mode	1FH 03H
Cursor Set	1FH 24H xL xH yL yH
Scroll Display Action	1FH 28H 61H 10H wL wH cL cH s
Display Blank	1FH 28H 61H 11H p t1 t2 c
Screen Saver	1FH 28H 61H 40H p
Bit Image Display Group	1FH 28H 66H 11H xL xH
Font Magnified Display	1FH 28H 67H 40H x y
Brightness Level Setting	1FH 58H n

The module defaults to 5x7 font, cursor top left at power on.

COMMON FONT

	00	10	20	30	40	50	60	70
00				0	1	2	3	4
01				5	6	7	8	9
02				A	B	C	D	E
03				F	G	H	I	J
04				K	L	M	N	O
05				P	Q	R	S	T
06				U	V	W	X	Y
07				Z	[]	^	_
08				`	a	b	c	d
09				e	f	g	h	i
0A				j	k	l	m	n
0B				o	p	q	r	s
0C				t	u	v	w	x
0D				y	z	{	}	~
0E				?	N	n	~	
0F				/	0	o		

INTERNATIONAL FONTS (n=0)

	80	90	A0	B0	C0	D0	E0	F0
00	€	£	¥	¤	¢	£	¤	¥
01	€	£	¥	¤	¢	£	¤	¥
02	€	£	¥	¤	¢	£	¤	¥
03	€	£	¥	¤	¢	£	¤	¥
04	€	£	¥	¤	¢	£	¤	¥
05	€	£	¥	¤	¢	£	¤	¥
06	€	£	¥	¤	¢	£	¤	¥
07	€	£	¥	¤	¢	£	¤	¥
08	€	£	¥	¤	¢	£	¤	¥
09	€	£	¥	¤	¢	£	¤	¥
0A	€	£	¥	¤	¢	£	¤	¥
0B	€	£	¥	¤	¢	£	¤	¥
0C	€	£	¥	¤	¢	£	¤	¥
0D	€	£	¥	¤	¢	£	¤	¥
0E	€	£	¥	¤	¢	£	¤	¥
0F	€	£	¥	¤	¢	£	¤	¥

PARALLEL INTERFACE – CN1

Pin	Sig	Pin	Sig
1	GND	8	D1
2	VCC	9	D2
3	NC*	10	D3
4	RS	11	D4
5	/WR	12	D5
6	/RD	13	D6
7	DN	14	D7/PRI(SY)

*Pin 3 can be changed to /RESET or PBUSY terminal by selection of Jumper JRB. RS is not used. Full specification available on request.

SERIAL INTERFACE – CN2 (J2)

Pin	Async. Sig	Syn. Sig
1	VCC (5V)	VCC (5V)
2	SIN	SIN
3	GND	GND
4	SBUSY	SBUSY
5	NC	SCK
6	/RESET	/RESET

CONTACT

Noritake Sales Office Tel Nos
 Nagoya Japan: +81 (0)52-561-9867
 Canada: +1-416-291-2946
 Chicago USA: +1-847-439-9020
 Munchen (D): +49 (0)89-3214-290
 Itron UK: +44 (0)1493 601144
 Rest Europe: +49 (0)61-0520-9220
www.noritake-itron.com

Subject to change without notice.
 IUK Doc Ref:04175 Iss:1 26Nov02