



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Midi-Contactors

Auxiliary contacts/contact blocks characteristics

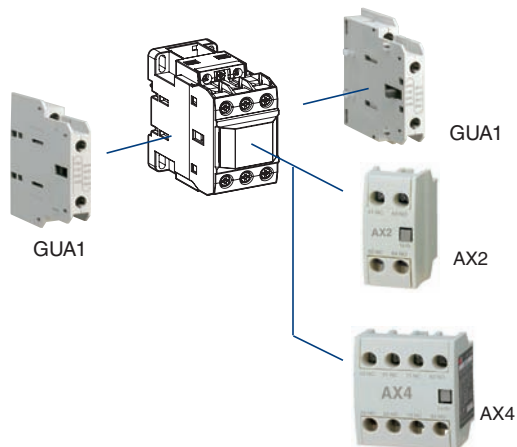


Contactor frame	
Contactor types	
Number of auxiliary contact	
Normally open	[EA]
Normally closed	[EA]
Auxiliary contact blocks, optional	
Type	
Number of auxiliary contact	
Normally open	[EA]
Normally closed	[EA]
Characteristics	
Rated operational voltage, Ue [V]	
Rated insulation voltage, Ui	
Conforming to IEC 947-1	[V]
Conforming to UL, CSA	[V]
Operating current frequency [Hz]	
Short-circuit protection	
Minimum switching capacity	
U min.	DC [V]
I min.	[mA]
Thermal current, Ith [A]	
Operational current	
AC15 duty (A600)	120V [A]
	240V [A]
	380V [A]
	480V [A]
	600V [A]
DC13 duty (P600)	125V [A]
	250V [A]
	440V [A]
	500V [A]
	600V [A]
Lifetime (mil.operations)	
AC15 duty	220V
	440V
DC13 duty	220V
	440V
Operation cycles per hour	

		12AF	32AF	63AF	95AF						
		GC 9 GC12	GC18 GC25 GC32	GC35 GC40 GC50 GC63	GC65 GC75 GC85 GC95						
		1 (standard) or 1 (optional)	1 1	2 2	2 2						
		AX2		AX4							
		2	1	0	4	3	2	1	0	GUA1	
		0	1	2	0	1	2	3	4	1	
		690									
		600					1000V				
		25~400									
		gLgG fuse: 16A (conforming to IEC EN947-5-1)									
		24					17				
		10					5				
		16									
		6									
		3									
		1.9									
		1.5									
		1.2									
		1.1									
		0.55									
		0.31									
		0.27									
		0.2									
		0.5									
		0.5									
		0.5									
		0.5									
		1800									

Accessories Auxiliary contact blocks

for contactors and reversing contactors

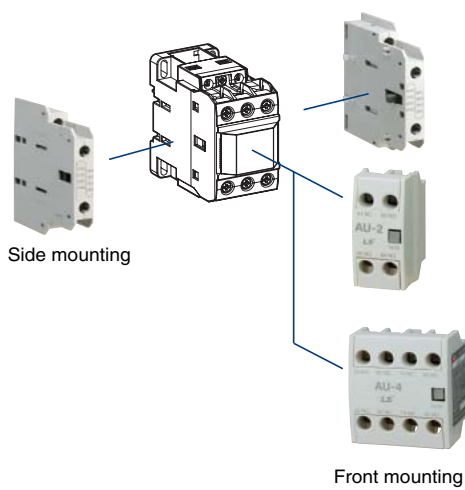

Using contactors	Mounting	Number of contacts per block	Composition		Type	Weight
			NO	NC		g
Contactors and reversing contactors GC9 ~ 95 GC9R ~ 95R	Front	2	1	1	AX2	28
			2	-		
	Side	4	2	2	AX4	50
			1	3		
4			-			
3	4	1	GUA1	53		

