



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

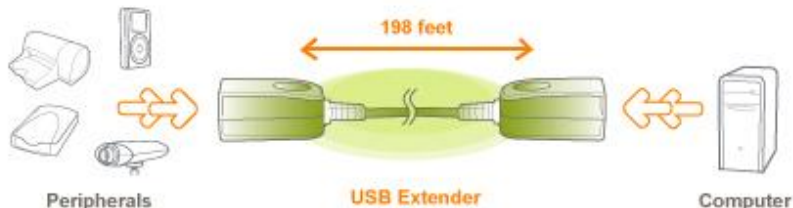


Model: GUCE51**USB Extender for USB 1.0 and 1.1**

Extend USB up to 198 ft via Cat5, Cat5e or Cat6 RJ45 cabling

**Functions**

The GUCE51 comprises two units, Local and Remote. These units are interconnected with Cat5, Cat5e, or Cat6 cabling. Now you can extend peripherals to locations up to 198 feet away without any signal loss.

**Description**

The GUCE51 comprises two units, Local and Remote. These units are interconnected with Cat5, Cat5e, or Cat6 cabling. Now you can extend USB peripherals to locations up to 198 feet away.

Features

- Use Cat5, Cat5e, or Cat6 RJ45 cabling to extend your USB peripherals up to 198 feet away
- Transparent data extension
- Extremely easy to install
- Compact design, allows for easy placement
- Fully compliant with (1.0, 1.1) USB standards
- For use with any USB compatible computer
- No software required

Specifications

- | | |
|---------------------------|---|
| • USB Specification | USB 1.0, 1.1 compliant |
| • Humidity | 20-80% RH, (Non Condensing) |
| • USB bandwidth | 12 Mbps (1.5Mbps) |
| • Operating Temperature | 20° to 50° (Celsius) |
| • Storage Temperature | 0° to 70° (Celsius) |
| • OS Support | Win 98, 98SE, 2000, ME, XP, MAC OS 8.6 or greater |
| • Unit Dimensions | 1.9 x 1.3 x .9 in (4.9 x 3.3 x 2.3 cm) |
| • Local Unit cable length | 18 in (45 cm) |
| • Package Dimensions | 2.5 x 6 x 4.8 in (6.4 x 15.2 x 12.2 cm) |
| • Pack Weight | 0.4 lbs (0.181 kg) |
| • Unit Weight | 0.3 lbs (0.135 kg) |
| • Housing | Plastic |
| • Power | 300ma @ 5.0V (powered from USB Host port) |

Packing List

- 1 - GUCE51 Remote Unit
- 1 - GUCE51 Local Unit
- 1 - Quick Start Guide
- 1 - Warranty/Registration Card