



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Surface Mount QSOP Resistor Networks

## QSOP Series

- Reliable, no internal cavity
- High resistor density - .025" lead spacing
- Standard JEDEC 16, 20, and 24 pin packages
- Ultra-stable TaNSiI® resistors on silicon substrate
- RoHS compliant and Sn/Pb terminations available

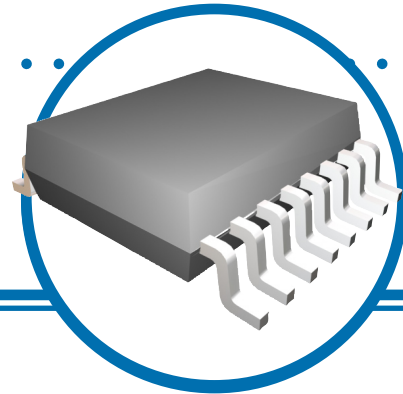

IRC's TaNSiI® QSOP resistor networks are the perfect solution for high volume applications that demand a small wiring board footprint. The 0.025" lead spacing provides higher lead density, increased component count, lower resistor cost, and high reliability.

The tantalum nitride film system on silicon provides precision tolerance, exceptional TCR tracking, low cost and miniature package. Excellent performance in harsh, humid environments is a trademark of IRC's self-passivating TaNSiI® resistor film.

The QSOP series is ideally suited for the latest surface mount assembly techniques and each lead can be 100% visually inspected. The compliant gull wing leads relieve thermal expansion and contraction stresses created by soldering and temperature excursions.

For applications requiring high performance resistor networks in a low cost, surface mount package, specify IRC QSOP resistor networks.

## Electrical Data

<b>Resistance Range</b>	10 to 250KΩ
<b>Absolute Tolerance</b>	To ±0.1%
<b>Ratio Tolerance to R1</b>	To ±0.05%
<b>Absolute TCR</b>	To ±25ppm/°C
<b>Tracking TCR</b>	To ±5ppm/°C
<b>Element Power Rating @ 70°C</b>	
<b>Isolated Schematic</b>	100mW
<b>Bussed Schematic</b>	50mW
<b>Package Power Rating @ 70°C</b>	16-Pin 750mW 20-Pin 1.0W 24-Pin 1.0W
<b>Rated Operating Voltage (not to exceed <math>\sqrt{P \times R}</math>)</b>	100 Volts
<b>Operating Temperature</b>	-55°C to +125°C
<b>Noise</b>	<-30dB

## Environmental Data

<b>Test Per MIL-PRF-83401</b>	<b>Typical Delta R</b>	<b>Max Delta R</b>
<b>Thermal Shock</b>	±0.02%	±0.1%
<b>Power Conditioning</b>	±0.03%	±0.1%
<b>High Temperature Exposure</b>	±0.03%	±0.05%
<b>Short-time Overload</b>	±0.02%	±0.05%
<b>Low Temperature Storage</b>	±0.03%	±0.05%
<b>Life</b>	±0.05%	±2.0%

### General Note

IRC reserves the right to make changes in product specification without notice or liability. All information is subject to IRC's own data and is considered accurate at time of going to print.

© IRC Advanced Film Division • Corpus Christi Texas 78411 USA  
Telephone: 361 992 7900 • Facsimile: 361 992 3377 • Website: www.irctt.com



A subsidiary of  
TT electronics plc

# Surface Mount QSOP Resistor Networks




## Manufacturing Capability Data


Absolute TCR (ppm/°C)	ISOLATED SCHEMATIC A				BUSSED SCHEMATIC B			
	Ohmic Range (Ω)	Available Tolerances	Available Ratio Tolerances	Best Tracking (±ppm/°C)	Ohmic Range (Ω)	Available Tolerances	Available Ratio Tolerances	Best Tracking (±ppm/°C)
250	10-25	F G J	F G	100	10-25	F G J	F G	200
	26-50	D F G J	C D F G	50	26-50	F G J	D F G	100
	51-200	C D F G J	C D F G	10	51-100	D F G J	C D F G	50
	201-250K	B C D F G J	A B C D F G	5	101-200	D F G J	B C D F G	25
					201-500	B C D F G J	B C D F G	20
					501-100K	B C D F G J	A B C D F G	5
100	26-50	D F G J	C D F G	50	26-50	F G J	D F G	100
	51-200	C D F G J	C D F G	5	51-100	D F G J	C D F G	50
	201-250K	B C D F G J	A B F G	5	101-200	D F G J	B C D F G	25
					201-500	B C D F G J	B C D F G	20
					501-100K	B C D F G J	A B C D F G	5
50	26-50	D F G J	C D F G	50	51-100	D F G J	C D F G	50
	51-200	C D F G J	C D F G	10	101-200	D F G J	B C D F G	25
	201-250K	B C D F G J	A B F G	5	201-500	B C D F G J	B C D F G	20
					501-100K	B C D F G J	A B C D F G	5
25	51-200	C D F G J	C D F G	10	201-500	B C D F G J	B C D F G	20
	201-250K	B C D F G J	A B F G	5	501-100K	B C D F G J	A B C D F G	5

# Surface Mount QSOP Resistor Networks


## Physical Data

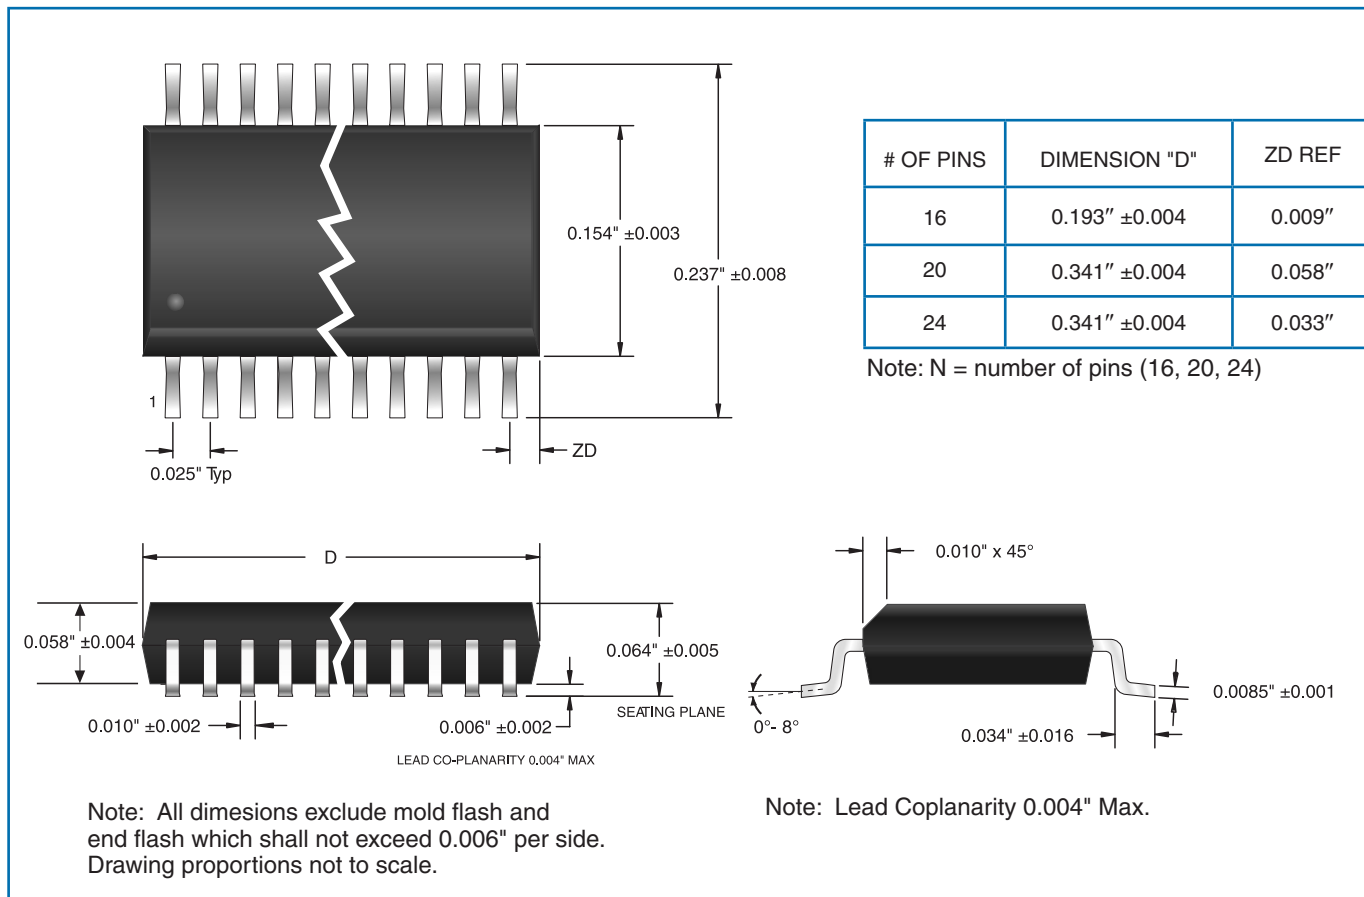

## Schematic Data

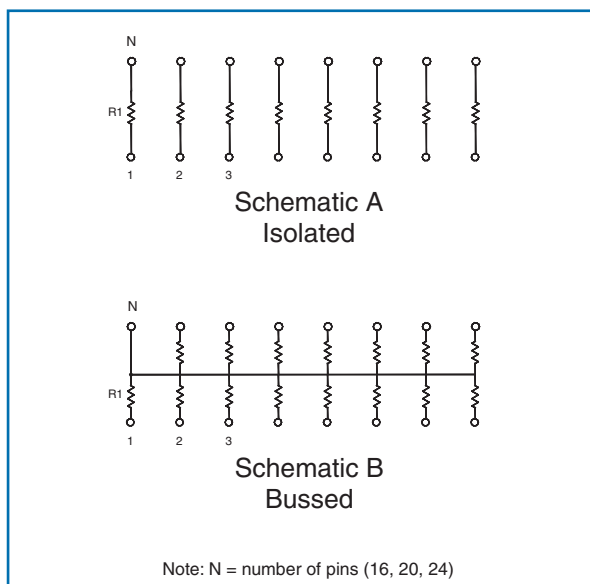

## Power Derating Curve

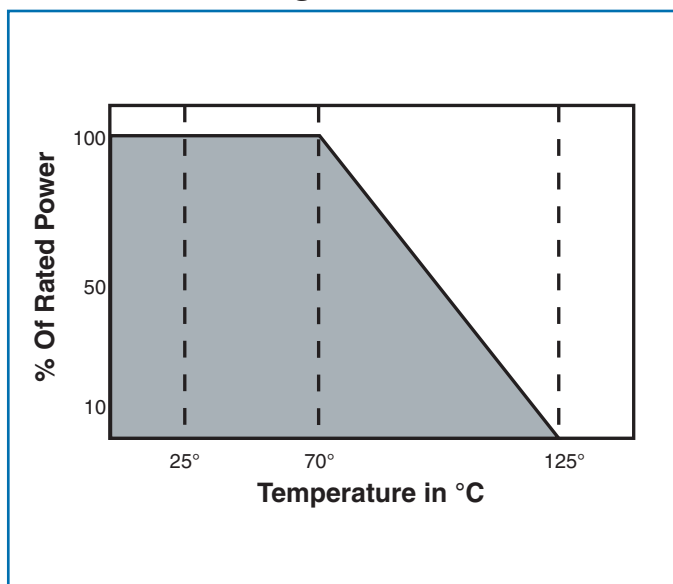

# Surface Mount QSOP Resistor Networks



## Ordering Data

Prefix ..... **GUS** - **QS8A** - **01** - **1002** - **F** **B**

### Style, Schematic and Termination

QS8A = 16-pin, 8 Isolated Resistors, with standard Sn/Pb terminations  
QS8ALF = 16-pin, 8 Isolated Resistors, with 100% matte tin, Pb-free terminations  
QS8B = 16-pin, 15 Bussed Resistors, with standard Sn/Pb terminations  
QS8BLF = 16-pin, 15 Bussed Resistors, with 100% matte tin, Pb-free terminations

QS0A = 20-pin, 10 Isolated Resistors, with standard Sn/Pb terminations  
QS0ALF = 20-pin, 10 Isolated Resistors, with 100% matte tin, Pb-free terminations  
QS0B = 20-pin, 19 Bussed Resistors, with standard Sn/Pb terminations  
QS0BLF = 20-pin, 19 Bussed Resistors, with 100% matte tin, Pb-free terminations

QSCA = 24-pin, 12 Isolated Resistors, with standard Sn/Pb terminations  
QSCALF = 24-pin, 12 Isolated Resistors, with 100% matte tin, Pb-free terminations  
QSCB = 24-pin, 23 Bussed Resistors, with standard Sn/Pb terminations  
QSCBLF = 24-pin, 23 Bussed Resistors, with 100% matte tin, Pb-free terminations

### Absolute TCR Code

00 =  $\pm 250$  ppm/ $^{\circ}$ C; 01 =  $\pm 100$  ppm/ $^{\circ}$ C; 02 =  $\pm 50$  ppm/ $^{\circ}$ C; 03 =  $\pm 25$  ppm/ $^{\circ}$ C

### Resistance Code

4-Digit Resistance Code  
Ex: 1002 = 10K $\Omega$ , 50R1 = 50.1 $\Omega$

### Absolute Tolerance Code

J =  $\pm 5\%$ ; G =  $\pm 2\%$ ; F =  $\pm 1\%$ ; D =  $\pm 0.5\%$ ; C =  $\pm 0.25\%$ ; B =  $\pm 0.1\%$

### Ratio Tolerance Code (optional)

G =  $\pm 2\%$ ; F =  $\pm 1\%$ ; D =  $\pm 0.5\%$ ; C =  $\pm 0.25\%$ ; B =  $\pm 0.1\%$ ; A =  $\pm 0.05\%$

### Packaging

Specify tubes or tape & reel.

For additional information or to discuss your specific requirements,  
please contact our Applications Team using the contact details below.