

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









SPECIFICATION

Part No. : **GW26.0151**

Product Name : 2.4GHz Miniature Screw mount Monopole

Antenna

Feature : RP-SMA(M) Connector

IP65

Peak Gain Max 1.8dBi

Height 30.3mm Diameter 7.9mm

ROHS Compliant





1 Introduction

The GW.26 2.4 GHz Monopole RP-SMA(M) mount antenna is ideal for 2.4 GHz wireless applications such as Bluetooth and Wireless LAN.

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

Connector mount is fully customizable.



2 Specification

Wi-Fi 2.4GHz				
Frequency	2400~2500MHz			
Bandwidth	100MHz			
Peak Gain	Max 1.8dBi			
Radiation Efficiency	> 40%			
Radiation	Omni-directional			
Polarization	Vertical			
Power Handling 1W Max	Power Handling 1W Max			
Electrical Wave	½ Monopole			
Impedance	50Ω			
Operating Temperature	-40°C ~ +85°C			
Storage Temperature	-40°C ~ +85°C			


3 Mechanical Properties

Mechanical Properties			
Colour	Black and Green		
IP rating	IP-65		
Connector	RP-SMA(M)		




4 Antenna Characteristics

4.1 Antenna S11

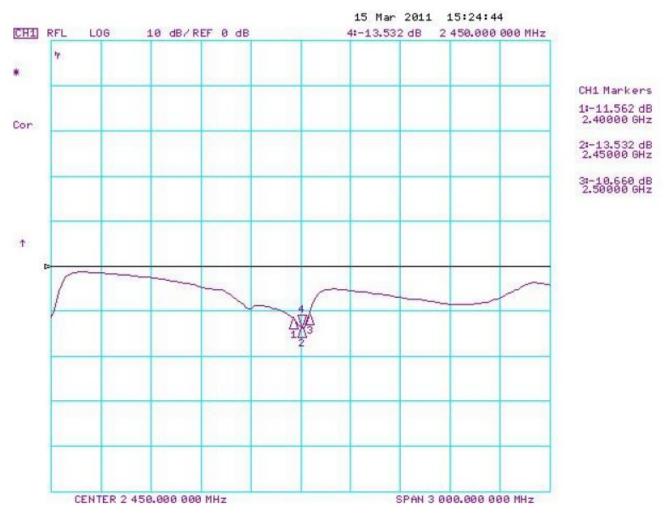




4.2 Antenna Peak Gain

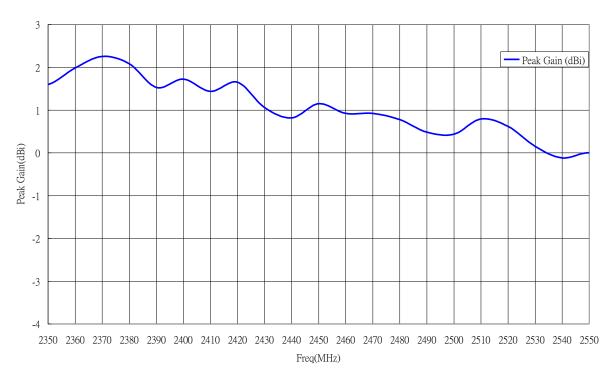


4.3 Antenna Efficiency

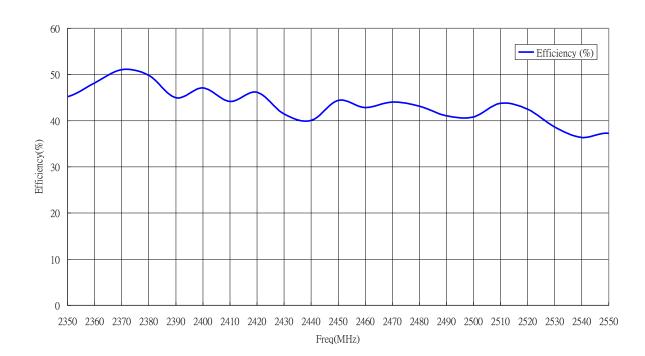






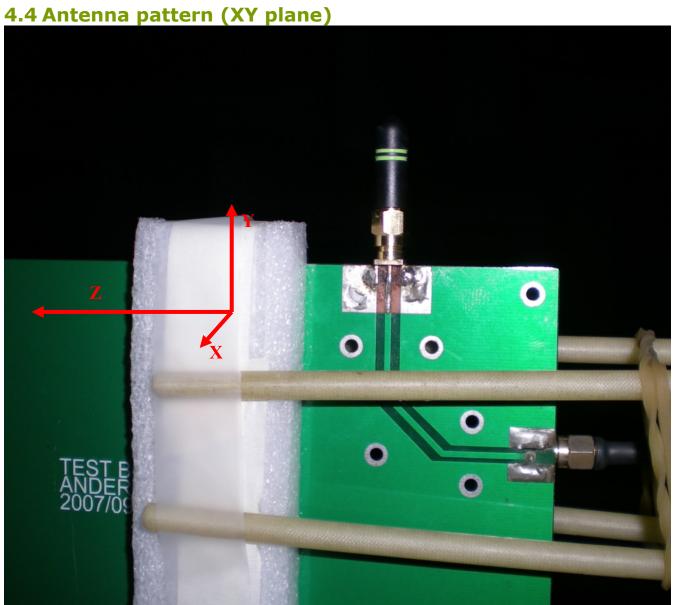




4.5 Antenna pattern (XY plane)

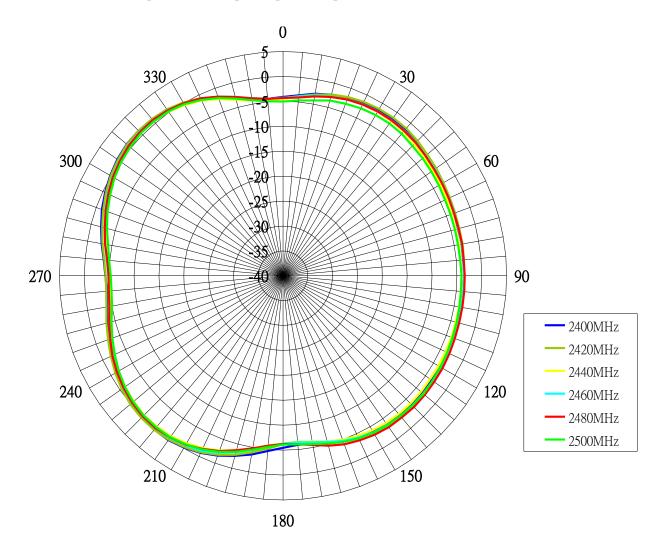




4.6 Antenna pattern (XZ plane)

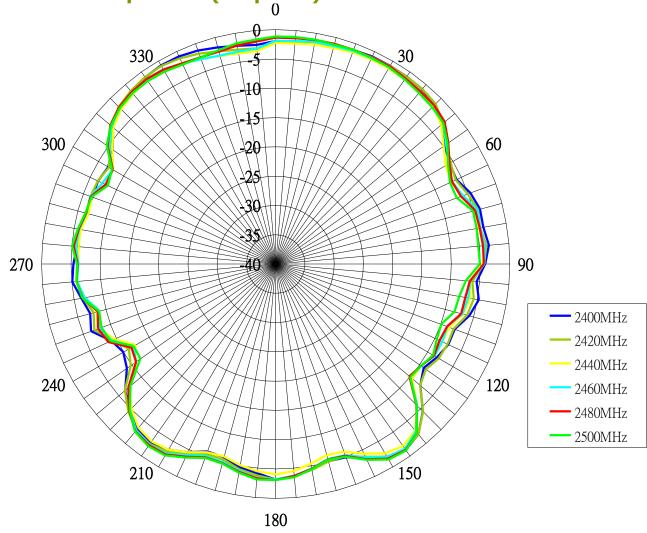




4.7 Antenna pattern (YZ plane)

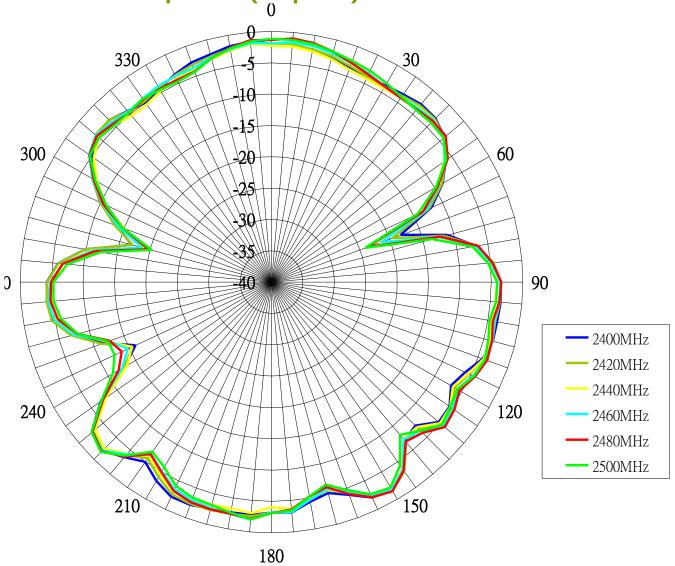



5. Outline Drawings and Structure

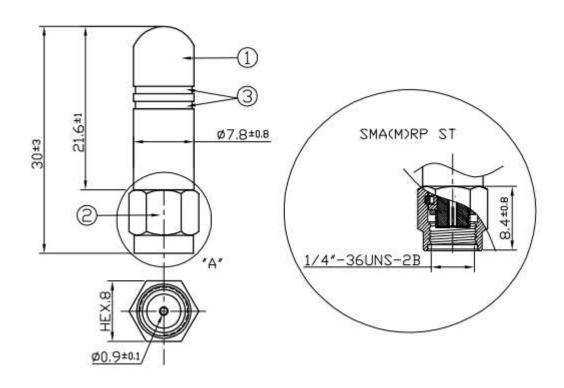

ř.	Name	Material	Finish	QTY
1	Antenna Housing	TPEE	Black	1
2	SMA(M)RP ST	Brass	Gold	1
3	Colour Stripes	Acrylic Paint	Green	1



6. Packaging

GW.26.0151


Packaging Specifications


1 pcs GW.26.0151 per PE Bag Bag Dimensions - 74 x 42 mm Weight - 4g


100 pcs GW.26.0151 per PE Large Bag Bag Dimensions - 280x 180mm Weight - 400kg


1500 pcs GW.26.0151 per carton Carton - 360x 310 x 160mm Weight - 6.5Kg

Pallet Dimensions 120x 100 x 143cm 72 Cartons per Pallet 12 Cartons per layer 6 Layers





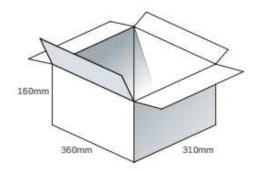





Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice.

Taoglas reserves the rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.