



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



GW5BTF15L0B


White LED (High Color Rendering)

- High power consumption 6.7W & high CRI LED emitters for solid-state lighting application.
- Blue LED die + Red and Green phosphor technique to achieve high CRI.
- Based on "ceramic substrate" to achieve high level reliability and heat release.

Feature

- (1) Outside dimension 18 x 18 x 1.5mmt *1 (Emitting part excluded)
- (2) 48 LED dice mounted.
- (3) CRI Ra=87(Avg.), Color temperture 3,000K
- (4) Not required wiring on board. Possible to attach easily and directly to heat sink.
- (5) CCT and Ra characteristics are based on EnergyStar program.

External dimensions and equivalent circuit (unit : mm)

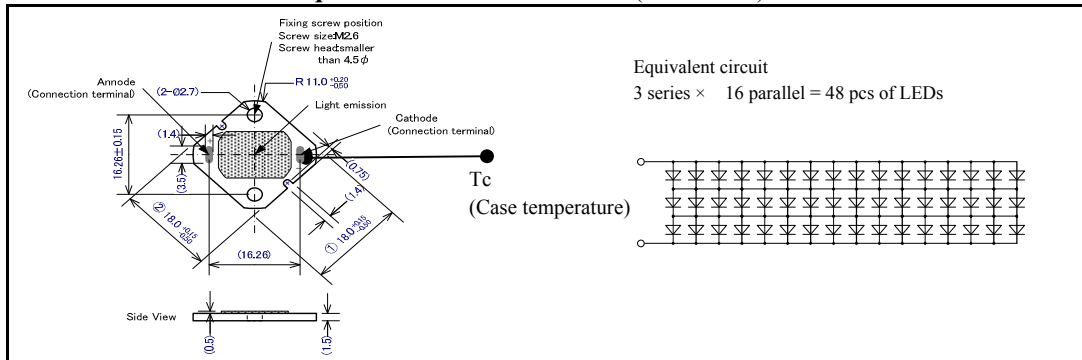

Absolute maximum ratings (Reference value)

Item	Symbol	Rating	Unit
Power Dissipation	P	8.0	W
Forward Current	I _F	700	mA
Reverse Voltage	V _R	15	V
Operating Temperature	T _{opr}	- 30 ~ + 90	°C
Storage Temperature	T _{stg}	- 40 ~ + 100	°C


Electro-optical characteristics (Reference value) (Tc=25°C)

Item	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Forward Voltage	V _F	I _F = 640 mA	8.5	(10.5)	11.5	V
Luminous Flux	Φ	I _F = 640 mA	270	(360)	-	lm
Chromaticity Coordinates	x	I _F = 640 mA	-	0.434	-	-
	y		-	0.403	-	-
Color Temperature	-	I _F = 640 mA	(2870)	3045	(3220)	K
CRI	Ra	I _F = 640 mA	-	(87)	-	-

Chromaticity coordinate

Rank	Chromaticity table				
	Point 1	Point 2	Point 3	Point 4	
-	x	0.4562	0.4299	0.4147	0.4373
	y	0.4260	0.4165	0.3814	0.3893

(I_F=640mA T_c=25°C)

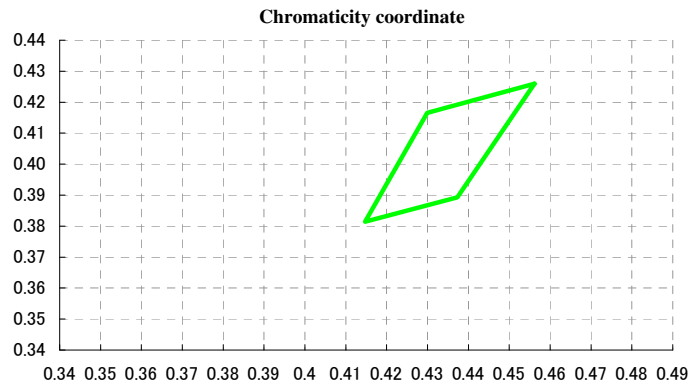

The information of this leaflet is tentative difinition. Please confirm it with specifications when you adopt it.