



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832



Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Three phase full Bridge with Trench MOSFETs in DCB isolated high current package

$V_{DSS} = 100\text{ V}$
 $I_{D25} = 90\text{ A}$
 $R_{DSon\text{ typ.}} = 7.5\text{ m}\Omega$

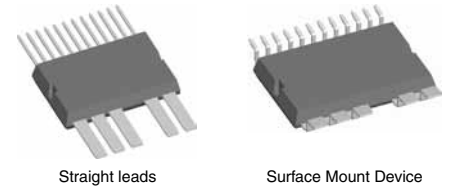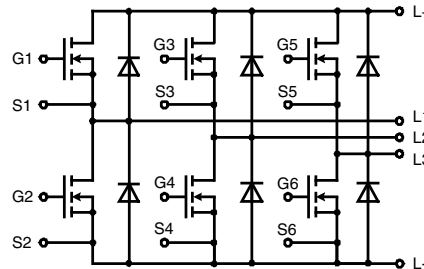

MOSFETs			
Symbol	Conditions	Maximum Ratings	
V_{DSS}	$T_J = 25^\circ\text{C to } 150^\circ\text{C}$	100	V
V_{GS}		± 20	V
I_{D25}	$T_C = 25^\circ\text{C}$	90	A
I_{D90}	$T_C = 90^\circ\text{C}$	68	A
I_{F25}	$T_C = 25^\circ\text{C (diode)}$	90	A
I_{F90}	$T_C = 90^\circ\text{C (diode)}$	68	A

Applications

- AC drives
 - in automobiles
 - electric power steering
 - starter generator
 - in industrial vehicles
 - propulsion drives
 - fork lift drives
- in battery supplied equipment

Features

- MOSFETs in trench technology:
 - low R_{DSon}
 - optimized intrinsic reverse diode
- package:
 - high level of integration
 - high current capability 300 A max.
 - aux. terminals for MOSFET control
 - terminals for soldering or welding connections
 - isolated DCB ceramic base plate with optimized heat transfer
- Space and weight savings

Package options

- 2 lead frames available
 - straight leads (SL)
 - SMD lead version (SMD)

Symbol	Conditions	Characteristic Values			
		$(T_J = 25^\circ\text{C, unless otherwise specified})$			
		min.	typ.	max.	
$R_{DSon}^{1)}$	on chip level at $V_{GS} = 10\text{ V}; I_D = 80\text{ A}$	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$		7.5 14	mΩ mΩ
$V_{GS(th)}$	$V_{DS} = 20\text{ V}; I_D = 250\text{ }\mu\text{A}$	2.5		4.5	V
I_{DSS}	$V_{DS} = V_{DSS}; V_{GS} = 0\text{ V}$		0.1	1	μA mA
I_{GSS}	$V_{GS} = \pm 20\text{ V}; V_{DS} = 0\text{ V}$			0.2	μA
Q_g Q_{gs} Q_{gd}	$V_{GS} = 10\text{ V}; V_{DS} = 65\text{ V}; I_D = 90\text{ A}$		90 30 30		nC nC nC
$t_{d(on)}$ t_r $t_{d(off)}$ t_f			130 95 290 55		ns ns ns ns
E_{on} E_{off} E_{recoff}			0.4 0.4 0.007		mJ mJ mJ
R_{thJC} R_{thJH}	with heat transfer paste (IXYS test setup)		1.3	1.0 1.6	K/W K/W

¹⁾ $V_{DS} = I_D \cdot (R_{DS(on)} + 2R_{Pin\text{ to Chip}})$

Recommended replacements: MTI 85W100GC

Source-Drain Diode

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
V_{SD}	(diode) $I_F = 70\text{ A}$; $V_{GS} = 0\text{ V}$		0.9	1.2
t_{rr}	$I_F = 70\text{ A}$; $-di_F/dt = 800\text{ A}/\mu\text{s}$; $V_R = 48\text{ V}$		55	ns
Q_{RM}			0.95	μC
I_{RM}			33	A


Component

Symbol	Conditions	Maximum Ratings	
I_{RMS}	per pin in main current paths (P+, N-, L1, L2, L3) may be additionally limited by external connections	300	A
T_J		-55...+175	$^{\circ}\text{C}$
T_{stg}		-55...+125	$^{\circ}\text{C}$
V_{ISOL}	$I_{ISOL} \leq 1\text{ mA}$, 50/60 Hz, $f = 1\text{ minute}$	1000	V~
F_C	mounting force with clip	50 - 250	N


Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$R_{pin\text{ to chip}}^{1)}$			0.6	$\text{m}\Omega$
C_P	coupling capacity between shorted pins and mounting tab in the case		160	pF
Weight			25	g

¹⁾ $V_{DS} = I_D \cdot (R_{DS(on)} + 2R_{Pin\text{ to Chip}})$

Straight Leads GWM 100-01X1-SL

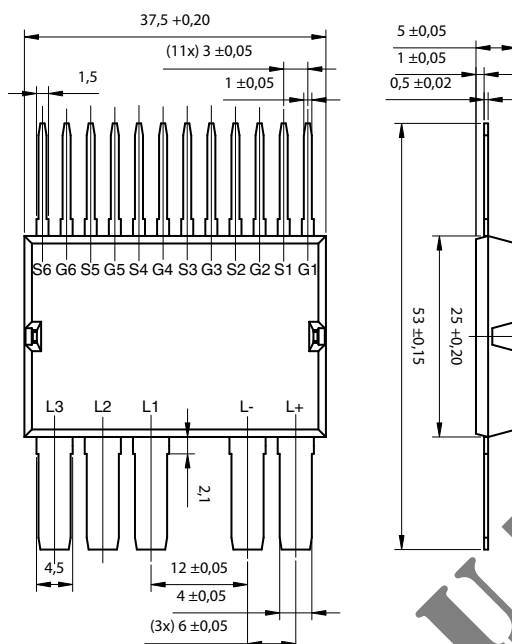

Surface Mount Device GWM 100-01X1-SMD

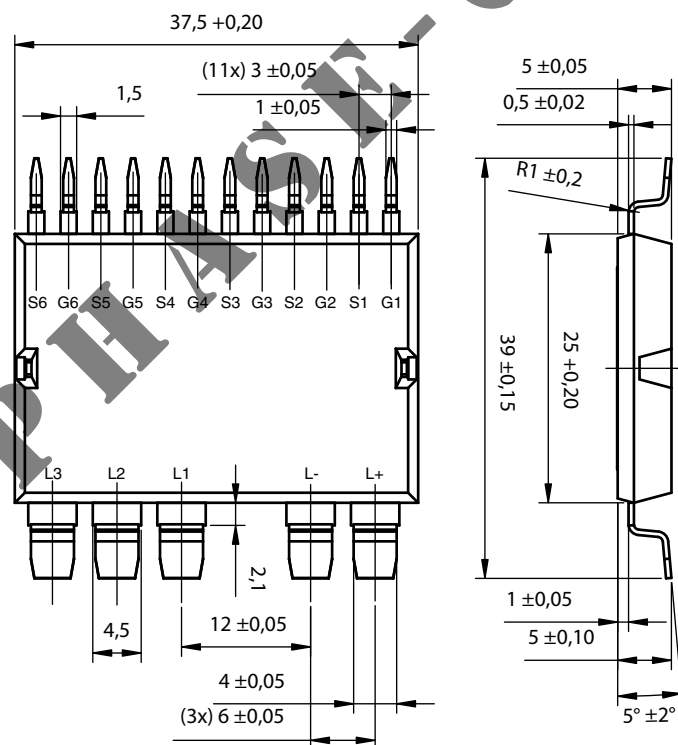

Leads	Ordering	Part Name & Packing Unit Marking	Part Marking	Delivering Mode	Base Qty.	Ordering Code
Straight	Standard	GWM 100-01X1 - SL	GWM 100-01X1	Blister	28	505 535
SMD	Standard	GWM 100-01X1 - SMD	GWM 100-01X1	Blister	28	505 542

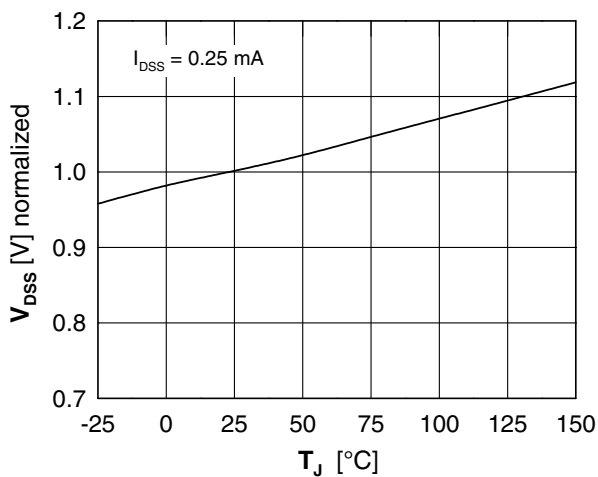


Fig. 1 Drain source breakdown voltage V_{DS} vs. junction temperature T_J

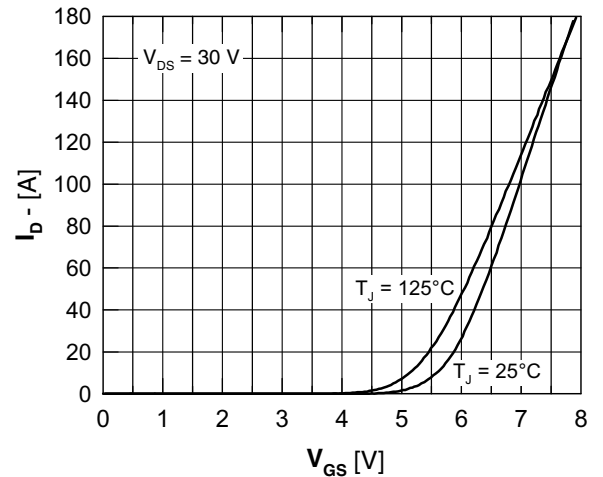


Fig. 2 Typical transfer characteristic

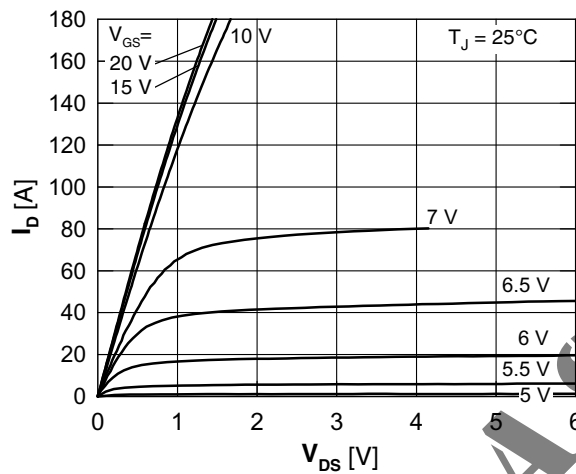


Fig. 3 Typical output characteristic

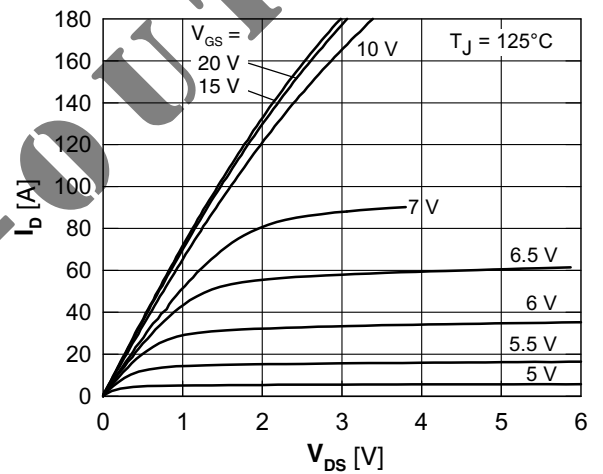


Fig. 4 Typical output characteristic

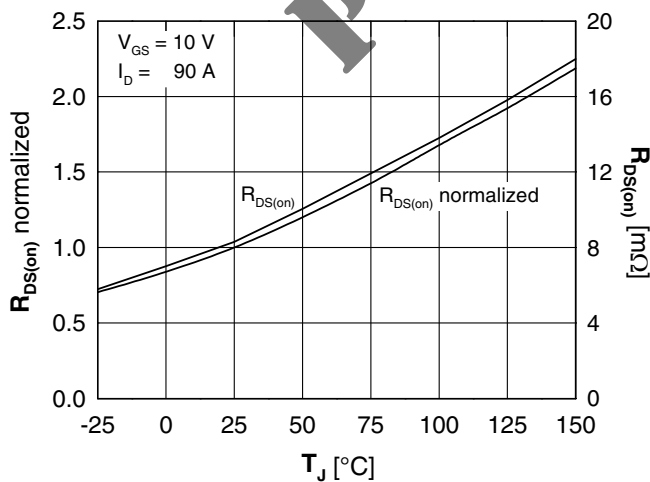


Fig. 5 Drain source on-state resistance $R_{DS(on)}$ versus junction temperature T_J

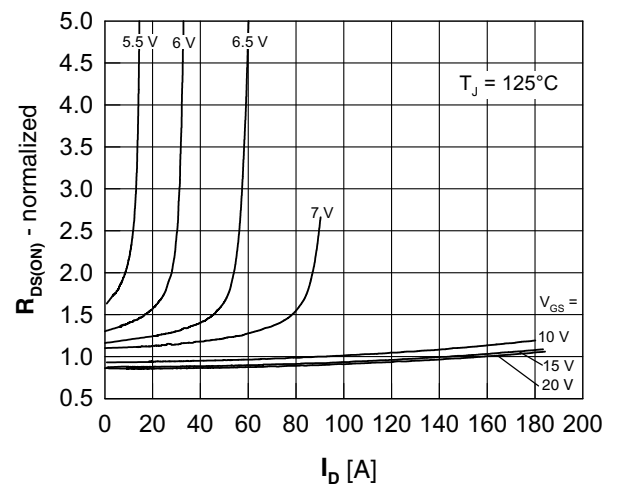


Fig. 6 Drain source on-state resistance $R_{DS(on)}$ versus I_D

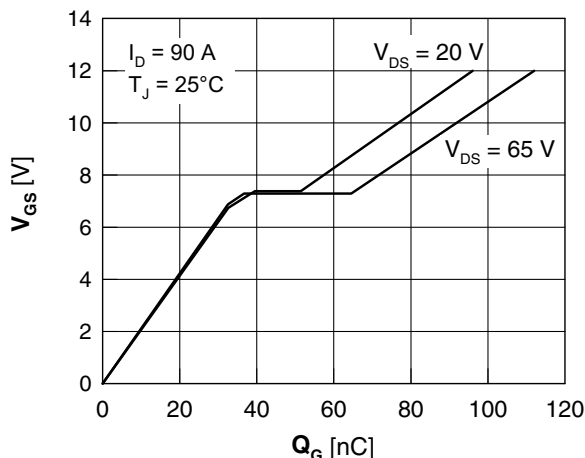


Fig. 7 Gate charge characteristic

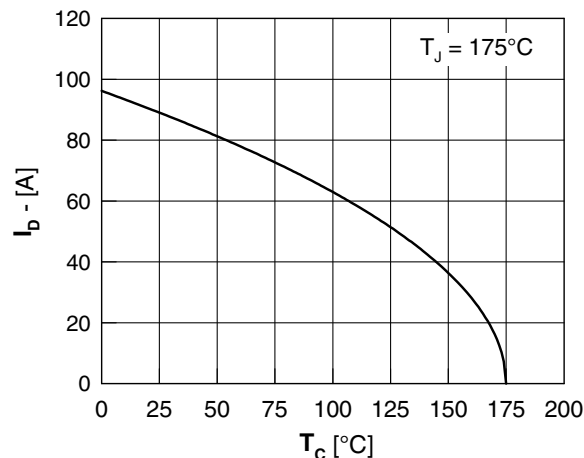


Fig. 8 Drain current I_D vs. case temperature T_c

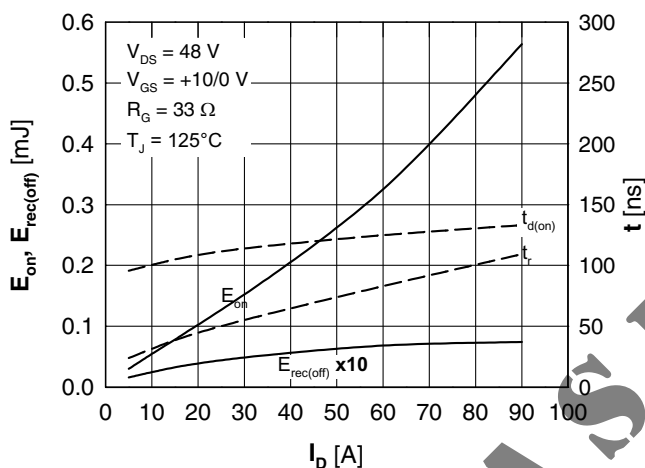


Fig. 9 Typ. turn-on energy & switching times vs. collector current, inductive switching

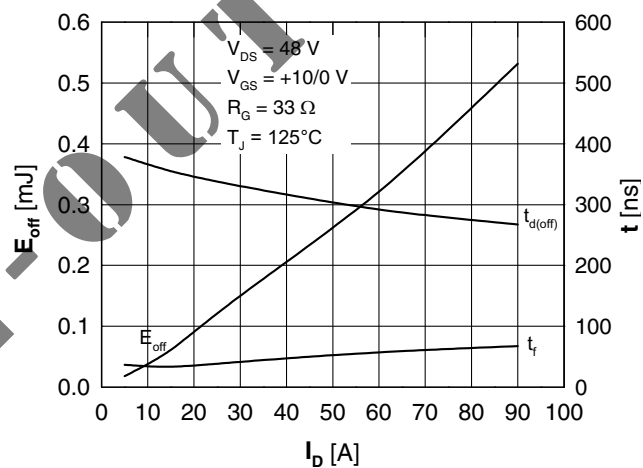


Fig. 10 Typ. turn-off energy & switching times vs. collector current, inductive switching

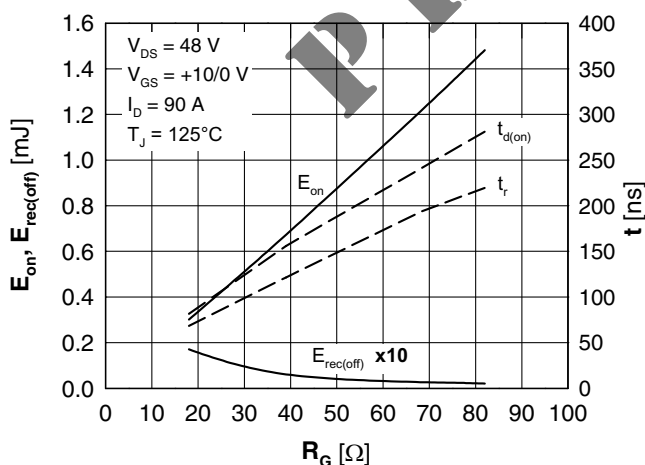


Fig. 11 Typ. turn-on energy & switching times vs. gate resistor, inductive switching

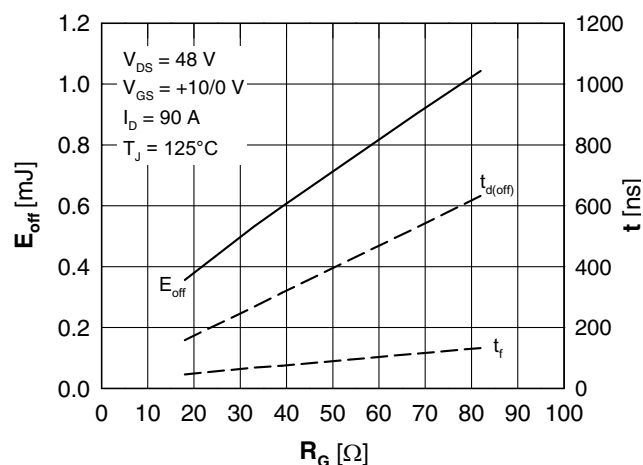


Fig. 12 Typ. turn-off energy & switching times vs. gate resistor, inductive switching

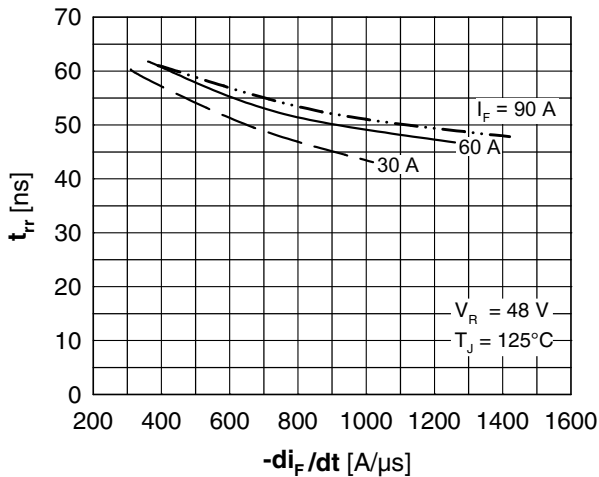


Fig. 13 Reverse recovery time t_{rr} of the body diode vs. di/dt

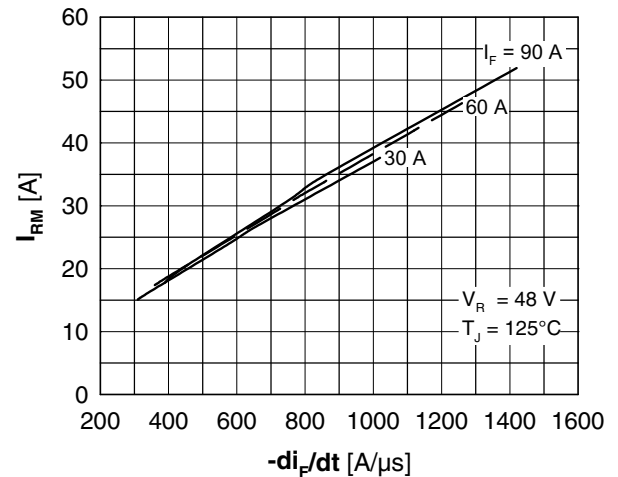


Fig. 14 Reverse recovery current I_{RM} of the body diode vs. di/dt

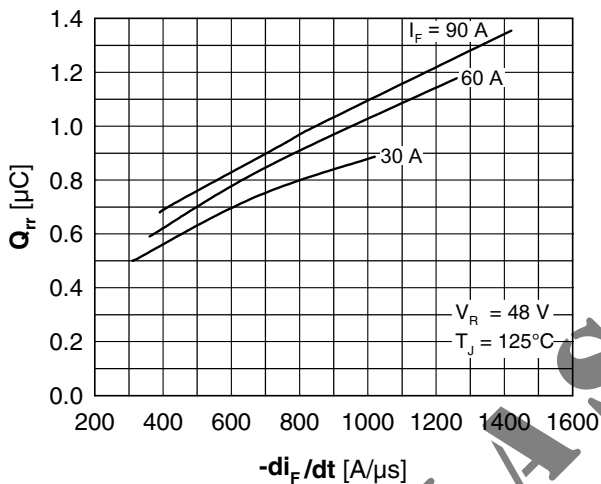


Fig. 15 Reverse recovery charge Q_{rr} of the body diode vs. di/dt

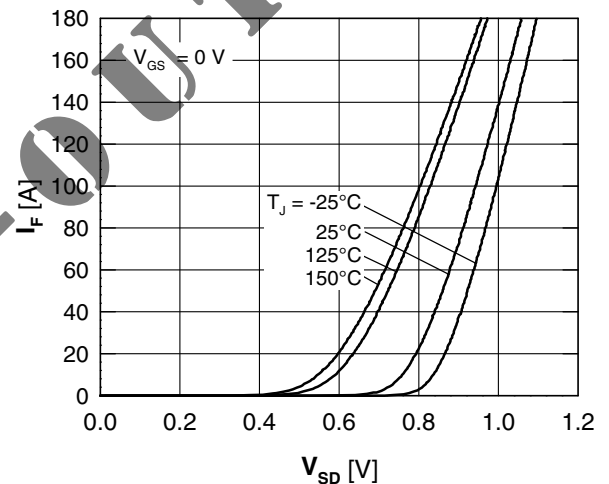


Fig. 16 Source drain diode current I_F vs. source drain voltage V_{SD} (body diode)

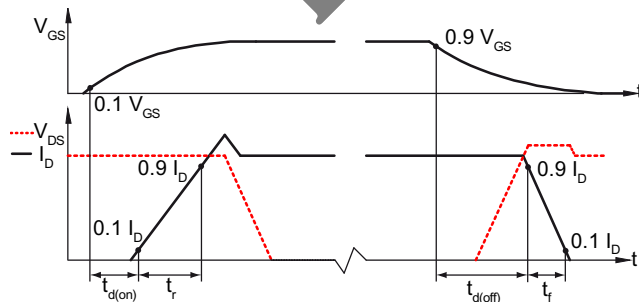


Fig. 17 Definition of switching times

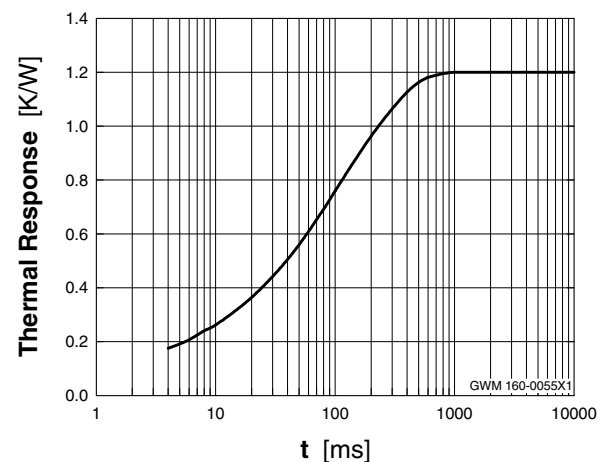


Fig. 18 Typ. thermal impedance junction to heatsink Z_{thJH} with heat transfer paste