



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





SINGLE COLOR LED


5mm Round Shape



H-1000L / H-2000L / H-3000L

HIGH BRIGHTNESS COLOR

Outline Dimensions

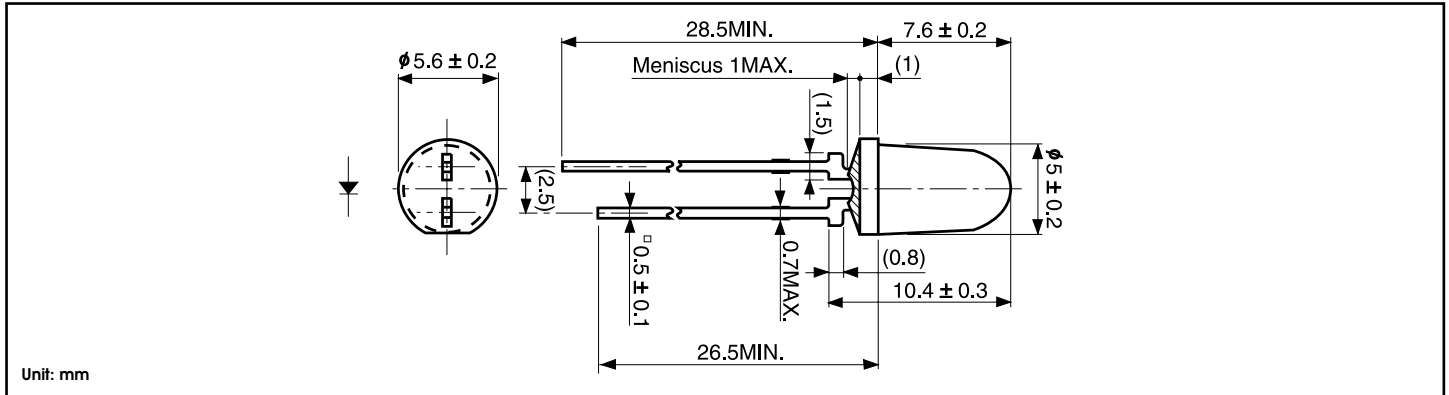

Absolute Maximum Ratings

(Ta=25°C)

Item	Symbol	Red		Units
		H (KR)		
Power Dissipation	Pd	125		mW
Forward Current	If	50		mA
Peak Forward Current	IfM	300		mA
Reverse Voltage	VR	4		V
Operating Temperature	Topr	-30 to +85		°C
Storage Temperature	Tstg	-30 to +100		°C
Derating (DC)*	If	0.67		mA/°C


* Ta=25°C, IfM applies for the pulse width 1msec. and duty cycle 1/20
The current derating for operation applies when the temperature is above 25°C

Electro-Optical Characteristics

*The viewing angle is an average and will vary by color (Ta=25°C)

Part No.	Material	Emitted Color	Lens Color	Luminous Intensity Iv			Wavelength				Forward Voltage Vf			Reverse Current IR		Viewing Angle (2 1/2)
				MIN.	TYP.	If	Peak P TYP.	Spectral Line Half Width		TYP.	MAX.	If	MAX.	VR		
								Dominant d TYP.	TYP.						If	
H-3000L	GaAlAs	Red	Water Clear	2,400	3,000	20	660	647	25	20	1.8	2.5	20	100	4	10°
H-2000L				1,400	2,000	20	660	647	25	20	1.8	2.5	20	100	4	
H-1000L				700	1,000	20	660	647	25	20	1.8	2.5	20	100	4	
Units				mcd		mA	nm		mA	V		mA	µA	V	Deg.	

Spatial Distribution (x)

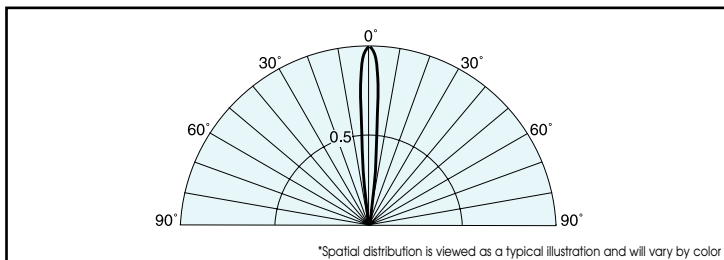

Operation Current Derating Chart

