

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









ITEM	Q'TY	PART NUMBER	PART DESCRIPTION
1	1	H-100C	T-1 (3mm) LED Holder, 90° Mount, Interlocking Center
2	1	3XX-S	T-1 (3mm) N-Flange Shouldered LED, See Page 2

REV.	DESCRIPTION	DATE	APPROVED
Α	Engineering Update w/o Changes	03/05/04	M. C.
В	LED Package Change to 3XX-S LEDs	12/14/07	M. C.
С	Engineering Update w/o Changes	06/20/16	J. C.

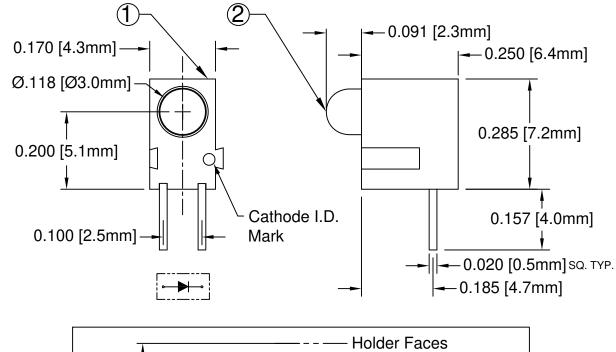

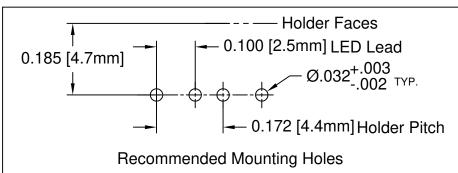

ABSOLUTE MAXIMUM RATINGS (Ta=25° C)

 REVERSE VOLTAGE
 5V

 REVERSE CURRENT
 100uA

 OPERATING TEMPERATURE RANGE
 -25° C - 85° C

 STORAGE TEMPERATURE
 -30° C - 100° C

 LEAD SOLDERING TEMPERATURE(1/16" FROM BODY)
 260° C FOR 5 SECONDS

STA	NDARD TO	LERA	NCE	
(UNLES	SS OTHERWIS	SE SPE	SIFIED)	
DECIMALS		ANG	ULAR	
.X	± .1	Χ°	± 1°	
.XX	±.02			Ц
	± .010		\Box	T
.,,,,,,,	± .010	1 9		
DESIGNED)·	DATE:)

4 THOMAS, IRVINE, CA. 92618
TEL: (949) 951-8808 FAX: (949) 951-3974

TITLE: T-1 (3MM) INTERLOCKING
90° SINGLE-LEVEL LED ASSEMBLY
ART NO: REVISION:

REV.	DESCRIPTION	DATE	APPROVED	
	SEE SHEET #1			

	Peak Wave Length Emitted Color λp(nm)	Lens	Electro-Optical Data				Viewing Angle		
LED Assy. No.		Emitted Color	Appearance	If	Vf		lv	2 ⊕ ½	LED P/N
	, κ ρ ()			(m A)	(\		(mcd)	(Deg)	
				TYP	TYP	MAX	TYP		
STANDARD				Data @	20m A				
H100CBWD	430	BLUE	DIFFUSED	20	4.0	4.5	20	45	3BWD-S
H100CGD	565	GREEN	DIFFUSED	20	2.2	2.6	30	45	3GD-S
H100CYD	585	YELLOW	DIFFUSED	20	2.1	2.6	20	45	3YD-S
H100CHD	635	HE RED	DIFFUSED	20	2.0	2.6	30	45	3HD-S
H100CRD	655	RED	DIFFUSED	20	1.7	2.0	6	45	3RD-S
H100CSRD	660	SUPER RED	DIFFUSED	20	1.7	2.6	90	45	3SRD-S
LOW CURRENT			Data @ 2m A						
H100CGDL	565	GREEN	DIFFUSED	2	1.9	2.2	6	45	3GDL-S
H100CYDL	585	YELLOW	DIFFUSED	2	1.9	2.2	4	45	3YDL-S
H100CHDL	635	HE RED	DIFFUSED	2	1.8	2.2	6	45	3HDL-S
5 VOLT				Data @ 5V					
H100CGD5V	565	GREEN	DIFFUSED	10	-	5.0	30	45	3GD5V-S
H100CYD5V	585	YELLOW	DIFFUSED	10	-	5.0	20	45	3YD5V-S
H100CHD5V	635	HE RED	DIFFUSED	10	-	5.0	30	45	3HD5V-S

