



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PART NUMBER	COPPER CONDUCTOR SIZE RANGE	STUD HOLE SIZE (IN.)	STUD HOLE SPACING (IN.)	HEX KEY SIZE (IN.)	FIGURE DIMENSIONS (IN.)					TIGHTENING TORQUE (IN.-LBS.)	STD. PKG. QTY.
					L	W	H	T	P		
H2L4-2N-X	#8 SOL- #4 STR	1/2	1.75	***	3.75	1.25	.76	.19	3.00	35	10
H2L8-2N-2	#4 SOL- #1 STR	1/2	1.75	7/16	3.94	1.38	.92	.22	3.00	100	2
H2L13-2N-2	#1 SOL- 2/0 STR	1/2	1.75	9/16	4.00	1.63	1.06	.22	3.00	250	2
H2L21-2N-2	2/0 STR- 4/0 STR	1/2	1.75	9/16	4.19	1.88	1.34	.31	3.00	250	2
H2L30-2N-1	4/0 STR- 300 kcmil	1/2	1.75	5/8	4.38	2.00	1.45	.31	3.00	350	1

NOTES:

1. ALLOWS FOR TERMINATION OF TWO COPPER CONDUCTORS.
2. CAST FROM HIGH STRENGTH CORROSION RESISTANT COPPER ALLOY TO PROVIDE PREMIUM ELECTRICAL AND MECHANICAL PERFORMANCE.
3. WIRE RANGE-TAKING CAPABILITY MINIMIZES INVENTORY REQUIREMENTS.
4. INTERNAL PRESSURE PLATE PROVIDES UNIFORM CLAMPING FORCE ON CONDCUTOR FOR PREMIUM ELECTRICAL PERFORMANCE.
5. INTERNAL BARREL SERRATIONS PROVIDE PREMIUM WIRE PULL-OUT STRENGTH.
6. INSPECTION WINDOW TO VISUALLY ASSURE FULL CONDUCTOR INSERTION.
7. FLAT BOTTOM ALLOWS FOR COMPLETE CONTACT WITH MOUNTING SURFACE.
8. UL LISTED FOR USE UP TO 600V AND TEMPERATURE RATED 90° C.

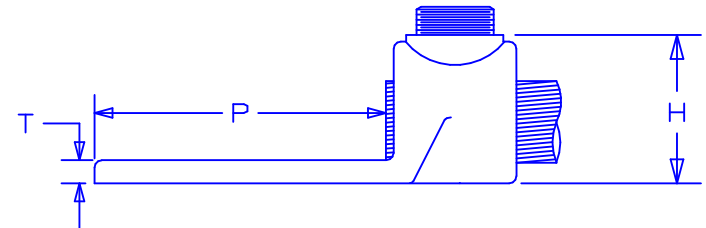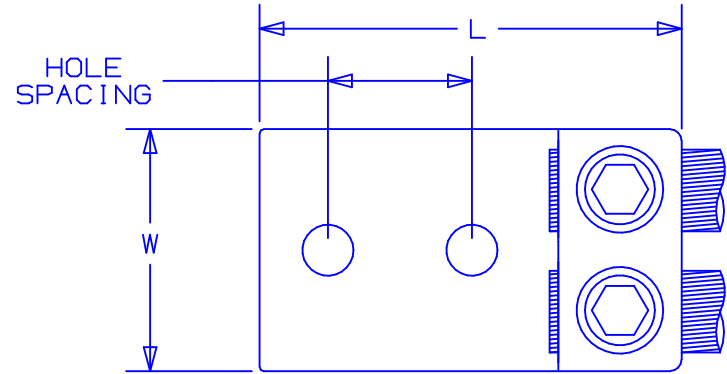

C41436\_00

00	9/04	KF		RELEASED			
----	------	----	--	----------	--	--	--

**PANDUIT**

CORP.

TINLEY PARK, ILLINOIS

TWO-HOLE, STRAIGHT TONGUE,  
TWO BARREL LUG  
H2L-2N FAMILY

REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST	DRAWN BY	CHK'D	SCALE	DRAWING NO.
								KLFU		NONE	C41436