



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- Shrink Temperature 248°F (120°C)
- High Operating Temperature 392°F (200°C) For Extreme Working Conditions
- Flame Retardant
- Resistant To Highly Corrosive Acids, Fluids, Fuels & Solvents
- Meets Military Specification MIL-DTL-23053/13

Put-Ups

Nominal Size	Part #	Unshrunk Diameter /mm	Shrunk Diameter /mm	Put-Ups		Available Colors	Lbs/100'
				Bulk Spool	Shop Spool		
1/8"	H2V0.13BK	3.2	1.6	200'	25'	Black (BK)	1.26
3/16"	H2V0.19BK	4.8	2.4	200'	25'	Black (BK)	1.45
1/4"	H2V0.25BK	6.4	3.2	200'	25'	Black (BK)	1.68
3/8"	H2V0.38BK	9.5	4.7	200'	25'	Black (BK)	2.27
1/2"	H2V0.50BK	12.7	6.4	100'	25'	Black (BK)	2.29
5/8"	H2V0.63BK	16.0	8.0	100'	25'	Black (BK)	2.50
3/4"	H2V0.75BK	19.1	9.5	100'	25'	Black (BK)	4.14
7/8"	H2V0.88BK	22.4	11.0	50'	25'	Black (BK)	4.83
1"	H2V1.00BK	25.4	12.7	50'	25'	Black (BK)	5.73
1 1/4"	H2V1.25BK	31.7	15.7	50'	25'	Black (BK)	8.20
1 1/2"	H2V1.50BK	38.1	19.1	50'	25'	Black (BK)	8.80
2"	H2V2.00BK	50.8	25.4	50'	25'	Black (BK)	13.40



Cut Cleanly
 Scissor

Material
 Fluoro-Elastomer

Grade
 H2V

2:1 Viton - Flexible Heatshrink Tubing Shrinks To 1/2 its original diameter!

2:1 Viton is a rubber-like, highly fluid resistant, flame retardant fluoro-elastomer heatshrink tubing with high solvent resistance.

The product is recommended for applications where resistance to aggressive solvents and high temperatures is required. Bundling, harnessing and environmental protection within engine compartments is one such application.

Colors Available:
 Black (BK)

High Temperature, Solvent Resistant, and Flame Retardant Flexible Fluoro-Elastomer





FLAMMABILITY

Moisture Absorption % *ASTM D-570* _____ 0.5
Flammability Rating *MIL-DTL-23053* _____ 15 Sec. Max.


CHEMICAL RESISTANCE

Corrosion *ASTM DTL-23053* _____ No Corrosion
Fluid Resistance (73°F/ 23°C 24 hrs.) _____ 1,200

Shrinks
248°F (120°C)

Maximum Continuous
Mil-I-23053
392°F (200°C)

Minimum Continuous
-67°F (-55°C)

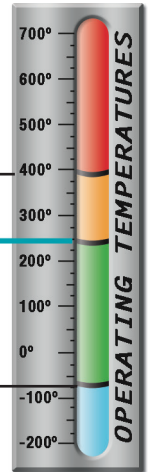

www.techflex.com



Measure the Shrinkflex® tubing to length and cut with a scissor. The thickness of your bundle, as well as the desired final appearance, will determine the length of the tubing you cut. Generally, a piece 1 1/2" - 2" long will accommodate almost any need. Single wires, or smaller bundles, require shorter pieces.



Slip the Shrinkflex® tubing over the bundle and position it so that both the sleeved and unsleeved portions are sufficiently covered. Notice the small pieces of tubing installed on single wires as part of a color coding system. If your project requires multiple operations, always work up from the smallest to the largest bundle.



Gently apply heat to Shrinkflex® tubing from a heat gun, hair dryer or torch with an appropriate attachment. Keep the heat source far enough away so that hot metal or direct flame does not come in contact with the tubing, wires or sleeving. Move the heat around the bundle to prevent damaging the sleeving and to ensure that all areas of the tubing have been shrunk. Once cooled, your installation is complete.

PHYSICAL PROPERTIES

Recommended Cutting _____ Scissors
Colors _____ 1
Tensile Strength PSI *ASTM D-638* _____ 1,200
Elongation % *ASTM D-638* _____ 250
Heat Shock (572°F/ 300°C, 4 Hrs.) _____ No Cracking
MIL-DTL-23053
Heat Resistance (482°F/ 250°C, 168 Hrs.) _____ 200
ASTM D-638
Longitudinal Change % _____ -20
MIL-DTL-23053
Cold Impact (-40°F/ -40°C) _____ No Cracking
ASTM D-746
Dielectric Strength (volts/mil) _____ 200
ASTM D-876
Volume Resistivity (ohm-cm) _____ 1.0 x 10¹¹
ASTM D-876