



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



The H38 absolute is an explosion proof version of the field-proven H25 encoder series. The H38 is UL certified for NEMA Class 4X and 6 (outdoor non-hazardous locations) and Class 4X and 13 (indoor non-hazardous locations). It is available with single and triple certifications for use in hazardous locations and includes a standard shaft seal, double bearing seals, and a cast aluminum housing with hard anodized and dichromate sealed finish. The H38 absolute encoder is suitable for use in petroleum service industries, solvent refining operations, spray painting applications, and explosive dust environments. When your application needs the ability to recover position information quickly after a power loss and you are operating in a hazardous area—the H38 may be the answer to your needs.



The H38 Absolute Encoder is available with the following certifications:

EN 61000-6-4 and EN 61000-6-2

II 2 G Ex d IIB T4 Gb

Class I, Group C & D;
Class II Group E, F & G;
Class I, XXXXX

IECEx (Exd IIB T4)
UL 14.0006X



The Mine Safety and Health Administration (MSHA) is an organization that operates in the United States and enforces compliance with safety and health standards in the Nation's mines. Consult factory for MSHA rated product.

Electrical Specifications

Code: 12 or 13 bits NB or GC; excess gray and BCD available

Counts Per Shaft Turn: 4096 or 8192

Count Transition Accuracy: ± 1/2 bit maximum

Supply Voltage: 5–28 VDC

Current Requirements: 120 mA typical

Output Formats: Parallel: Gray Code, Natural Binary and Binary Coded Decimal; Serial: Serial Synchronous Interface (SSI); Analog: 4–20 mA, 0–10V

Voltage/Output: (see note 5)
28V/V: Line Driver, 5–28 VDC in, $V_{out} = V_{in}$

28V/5: Line Driver, 5–28 VDC in, $V_{out} = 5$ VDC

28V/OC: Open Collector, 5–28 VDC in, O_{Cout}

SSI: 5–28 VDC in/5V $_{out}$

Protection Level: Reverse, overvoltage and output short circuit protection

Frequency Response: 100kHz (1200 RPM for 12-bits, 600 RPM for 13-bits)

Output Termination Pinouts: See table 3, back page

Mechanical Specifications

Shaft Diameter: 3/8" nominal

Flats On Shaft: Two flats, 0.80" long X 0.30" deep at 90°

Shaft Loading: Up to 40 pounds axial and 20 pounds radial applied 1/4" from housing

Shaft Runout: 0.0005 T.I.R.

Starting Torque at 25° C: 4.0 in-oz (max)

Bearings: Class ABEC 7 standard

Shaft Material: 303 stainless steel

Enclosure: Die cast aluminum, hard anodized with dichromate sealed finish. Shaft seals and sealed bearings are standard to achieve environmental ratings.

Bearing Life: 2 X 10⁶ revs (1300 hrs at 2500 RPM) at rated load; 1 X 10¹⁰ revs (67,000 hrs at 2500 RPM) at 10% of rated load

Maximum RPM: 10,000 RPM (see frequency response, below)

Moment of Inertia: 4.1 X 10⁻⁴ oz-in²

Weight: 64 oz typical (approx 4 lbs)

Environmental Specifications

Enclosure Rating: NEMA 4 X & 6 (IP66), outdoor Non-Hazardous locations, NEMA 4 X & 13 (IP66), indoor Non-Hazardous locations

Temperature: Standard operating all models, 0° to +70°C; Storage all models, -50° to +90°C; Extended temp testing avail.: for UL, -40° to +80°C; for CEN, -50° to +90°C

Shock: 50 g's at 11 msec

Vibration: 5 to 2000 Hz @ 20 g's

Humidity: 100% RH


Hazardous Area Rating: Underwriters Laboratories listed for use in hazardous locations; NEMA Enclosure 7, Class 1, Group C & D, Division 1, NEC Class 2 circuits only, or Class 2, Groups E, F, and G (see Table 1)

NOTES & TABLES: All notes and tables referred to in the text can be found on the back of this page.

H38 Absolute Encoder Ordering Options FOR ASSISTANCE CALL 800-350-2727

Use this diagram, working from left to right to construct your model number (example: H38D-12GC-28V/V-CW-SC-UL).

All notes and tables referred to can be found on the back of this page.

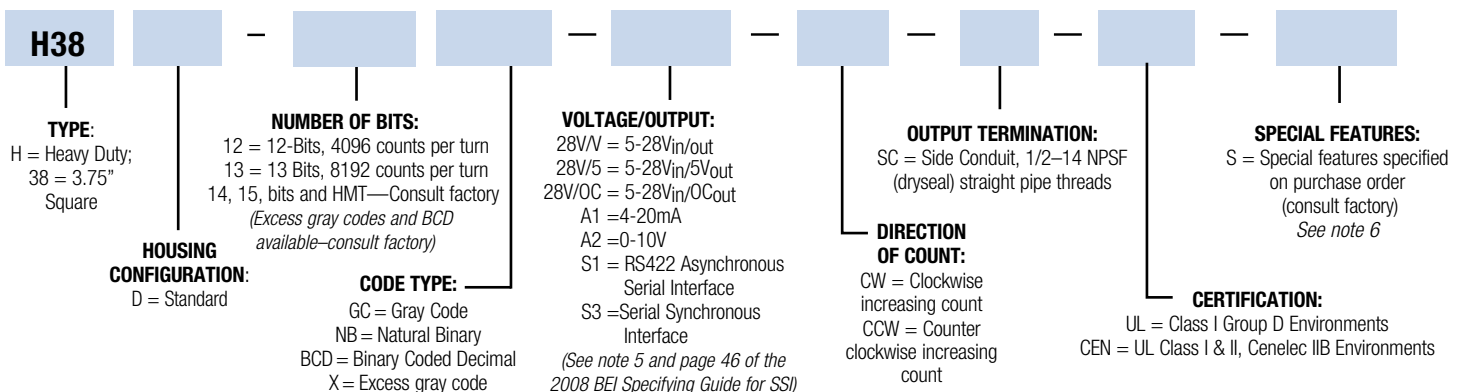

Options and Tables

Serial Synchronous Interface (SSI) SSI output provides effective synchronization in a closed-loop control system. A clock pulse train from a controller is used to clock out sensor data: one bit of position data is transmitted to the controller per one clock pulse received by the sensor. The use of a differential driver permits reliable transmission of data over long distances in environments that may be electrically noisy. The encoder utilizes a clock signal, provided by the user interface, to time the data transmission. Receiving electronics must include an appropriate receiver as well as line terminating resistors.

Features : • Synchronous transmission • Transmission lengths to 1000 feet • Accepts clock rates from 100 KHz to 1.8 MHz

Data Transmission Sequence

1. Output driver of the encoder is a MAX 491 transceiver in transmit mode. The recommended receiver is a MAX 491 transceiver in receive mode.
2. Controller provides a series of pulses (or differential pulse pairs) on the CLOCK input lines.
3. On the first HIGH-to-LOW CLOCK transition, the encoder latches its data at the current position and prepares to transmit.
4. Controller reads data on the falling edge of the next 15 clock cycles.
5. The first bit is a START bit and is always HIGH.
6. Next comes 13 data bits beginning with the most significant bit (MSB) and ending with the parity bit. On 12 bit encoders, bit 13 is LOW. When parity is not ordered, parity is LOW.
7. After the last CLOCK HIGH-to-LOW transition, a minimum of 40 microseconds must pass before the beginning of the next CLOCK series.

Interfacing Long Data Lines


Ordering SSI : HOW TO SPECIFY SSI OUTPUT IN THE ENCODER MODEL NUMBER: Use the designation, S3 between the Code Format designation and the Connector designation. **Example: H25D-SS-12GC-S3-CW-SM18**

Cable impedance can create a transmission delay, in effect, shifting the phase relationship between the clock pulse and the data. If this phase shift exceeds 180°, then the wrong bit position will be sampled by the receiver. As a result, the maximum allowable clock frequency is a function of the cable length. For 24 AWG, stranded, 3 pair cable (BEI part number 37048-003 or equivalent) the group delay is 1.36ns/ft. The table below shows the maximum transmission rate allowable as a function of cable length to ensure a phase shift of less than 90°.

CLOCK, Maximum (kHz) = 92,000 / Cable Length (ft)CW

| Cable Length (ft) | 50 | 100 | 200 | 300 | 500 | 1000 |
|-------------------|------|-----|-----|-----|-----|------|
| Max Freq (kHz) | 1800 | 900 | 500 | 300 | 200 | 100 |

SSI Timing

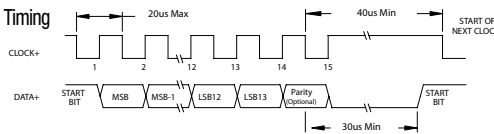

Notes

See Doc. 01059-000 supplied with encoders for important installation and Usage notes summarized here.

Encoder Installation:

1. Environment: Hazardous Locations — UL Complies with UL and cUL requirements;
2. **CEN** Shall comply with UL requirements plus CENELAC/ATEX plus IECEx standards
3. **WARNING:** Open all circuits prior to connecting this product to power and controller.
4. The installation must comply with NEC Class 2 circuits or with the regulations of the country of use.
5. AWG 14 - 22 stranded wire stripped to .25" [6.3mm] is recommended.
6. Use agency approved 105° C minimum rated cable/conductors housed within an approved rigid conduit.
7. Conduit runs must have a sealing fitting certified to 60079-0 Ex d IIB immediately at the entrance to the device.
8. Tightly close terminal block access cover prior to applying power.
9. For maximum bearing life, a flexible coupling is recommended between encoder shaft and driving shaft.
10. Thread sealant compound should be used for 1/2-14 fitting or cable gland to prevent ingress of contamination.

During Use:

1. Keep terminal block access tightly secured during use.
2. DO NOT loosen two 5/16" set screws at opposite face.

Maintenance and Service:

1. There are no user serviceable parts inside. Encoder must be returned to factory for service.
2. **WARNING:** Open all circuits to this product prior to opening access cover to disconnect wires.

Output Code and Terminations (12 & 13 Bit)

| | PARALLEL CODE | | | | TERMINATION TYPE | | |
|---------------------|-------------------|-----------------|-----------------|----------------------|------------------|----------------------|------------|
| | Gray Code | | Natural Binary | Binary Coded Decimal | Cable | Term Board H38 & H40 | |
| | 12 Bit | 13 Bit | 12 Bit | 13 Bit | | | |
| MSB | G ₁₁ | G ₁₂ | 2 ¹¹ | 2 ¹² | A ₀ | WHT/BLK 1 | |
| | G ₁₀ | G ₁₁ | 2 ¹⁰ | 2 ¹¹ | B ₀ | WHT/BRN 2 | |
| | G ₉ | G ₁₀ | 2 ⁹ | 2 ¹⁰ | C ₀ | WHT/RED 3 | |
| | G ₈ | G ₉ | 2 ⁸ | 2 ⁹ | D ₀ | WHT/ORN 4 | |
| | G ₇ | G ₈ | 2 ⁷ | 2 ⁸ | A ₁ | WHT/YEL 5 | |
| | G ₆ | G ₇ | 2 ⁶ | 2 ⁷ | B ₁ | WHT/GRN 6 | |
| | G ₅ | G ₆ | 2 ⁵ | 2 ⁶ | C ₁ | WHT/BLU 7 | |
| | G ₄ | G ₅ | 2 ⁴ | 2 ⁵ | D ₁ | WHT/IO 8 | |
| | G ₃ | G ₄ | 2 ³ | 2 ⁴ | A ₂ | WHT/GRY 9 | |
| | G ₂ | G ₃ | 2 ² | 2 ³ | B ₂ | WHT 10 | |
| | G ₁ | G ₂ | 2 ¹ | 2 ² | C ₂ | GRY/BLK 11 | |
| | LSB ₁₂ | G ₀ | G ₁ | 2 ⁰ | 2 ¹ | D ₂ | GRY/BRN 12 |
| | LSB ₁₃ | | G ₀ | | 2 ⁰ | A ₃ | GRY/RED 13 |
| 0V (CIRCUIT COMMON) | | | | | B ₃ | GRY/ORN | |
| DIRECTION OF COUNT | | | | | | ORN 18 | |
| CASE GROUND | | | | | | GRN 16 | |
| 0V (CIRCUIT COMMON) | | | | | | BLK 15 | |
| LATCH CONTROL | | | | | | YEL 17 | |
| +V (SUPPLY VOLTAGE) | | | | | | RED 14 | |
| SHIELD DRAIN | | | | | | BARE — | |

SSI Output Termination Table

| | Cable Conn | Term. Board |
|-------------------|------------|-------------|
| DATA + | YEL | 4 |
| DATA- | WHT/YEL | 7 |
| CLOCK+ | BLU | 5 |
| CLOCK- | WHT/BLU | 8 |
| DIR CONTROL | ORN | 6 |
| CASE GROUND | GRN | 1 |
| CIRCUIT COMMON | BLK | 2 |
| +V SUPPLY VOLTAGE | RED | 3 |
| SHIELD DRAIN | BARE | — |

Direction of Count: Standard is CW increasing when viewed from the shaft end. Pin 18 is normally HI (or N/C) and is pulled up internally to +V. To reverse the count direction, Pin 18 must be pulled LO (COMMON).

Latch control: Encoder outputs are active and provide continuous parallel position information when Pin 17 is HI (or N/C). Pin 17 is pulled up internally to +V. When Pin 17 is LO (COMMON) the encoder outputs are latched at the logic state that is present when the latch is applied and will stay latched until Pin 17 is no longer grounded.