



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- Shrink Temperature
194°F (90°C)
- Versatile And Economical
Termination Solution
- Wide Selection Of Sizes
And Colors
- Resists Common
Automotive Chemicals
- Easily Installs Over
Connectors And Splices

Put-Ups

Nominal Size	Part #	Unshrunk Diameter /mm	Shrunk Diameter /mm	Put-Ups		Available Colors	Lbs/ 100'
				Bulk Spool	Shop Spool		
1/16"	H3N0.06	1.5	0.5	500'	25'	11	0.18
1/8"	H3N0.13	3.0	1.0	500'	25'	11 & YG	0.37
3/16"	H3N0.19	4.5	1.5	500'	25'	11 & YG	0.55
1/4"	H3N0.25	6.0	2.0	250'	25'	11 & YG	0.74
3/8"	H3N0.38	9.0	3.0	200'	25'	11 & YG	1.01
1/2"	H3N0.50	12.0	4.0	200'	25'	11 & YG	1.28
3/4"	H3N0.75	18.8	6.0	200'	25'	11 & YG	1.87
1"	H3N1.00	24.0	8.0	100'	25'	11 & YG	2.86
1 1/2"	H3N1.50	38.0	13.0	100'	25'	11	4.51
2"	H3N2.00	50.0	17.0	100'	25'	11	6.33
3"	H3N3.00	75.0	25.4	100'	20'	BK	10.33



Cut Cleanly
Scissor

Material
Polyolefin

Grade
H3N

Economical 3:1 Heatshrink Tubing Shrinks To 1/3 its original diameter!

Shrinkflex heatshrink tubing is the ideal way to create a tight, professional finish on any wire, hose or cable management project. Once shrunk, the tubing will hold its reduced state even in elevated temperatures. The wide range of available colors and diameters makes a perfect solution for any termination application.

The high shrink ratio of 3:1 ensures that it will slip over large connectors or plugs and still provide a tight, professional seal.

Match the color of braided sleeving with our 3:1 Shrinkflex tubing and create a unified finished look.

Colors Available:
11= call for availability of colors.



Black (BK), Brown (BR), White (WH), Gray (GY), Clear (CL), Blue (BL), Green (GN), Yellow (YL), Orange (OR), Red (RD) and Purple (PP).

- Yellow Green(YG) is available in select sizes as a Ground ID

FLAMMABILITY

Moisture Absorption % *ASTM D-570* _____ 0.5
Flammability Rating _____ *UL 224, VW-1*

CHEMICAL RESISTANCE


Corrosion *ASTM DTL-23053* _____ No Corrosion
Fluid Resistance (73°F/ 23°C 24 hrs.) _____ 1,000

Shrinks
194°F (90°C)


Melt Point
ASTM D-2117
392°F (200°C)

Maximum Continuous
MIL-I-23053
275°F (135°C)


Minimum Continuous
-67°F (-55°C)

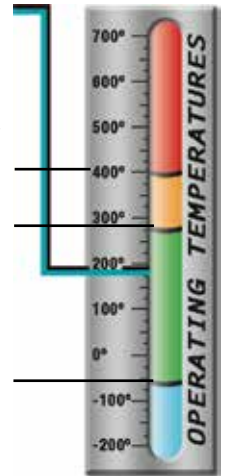


www.techflex.com



Measure the Shrinkflex® tubing to length and cut with a scissor. The thickness of your bundle, as well as the desired final appearance, will determine the length of the tubing you cut. Generally, a piece 1 1/2" - 2" long will accommodate almost any need. Single wires, or smaller bundles, require shorter pieces.



Slip the Shrinkflex® tubing over the bundle and position it so that both the sleeved and unsleeved portions are sufficiently covered. Notice the small pieces of tubing installed on single wires as part of a color coding system. If your project requires multiple operations, always work up from the smallest to the largest bundle.



Gently apply heat to Shrinkflex® tubing from a heat gun, hair dryer or torch with an appropriate attachment. Keep the heat source far enough away so that hot metal or direct flame does not come in contact with the tubing, wires or sleeving. Move the heat around the bundle to prevent damaging the sleeving and to ensure that all areas of the tubing have been shrunk. Once cooled, your installation is complete.

PHYSICAL PROPERTIES

Recommended Cutting _____ Scissors
Stock Colors _____ 12
Tensile Strength PSI *ASTM D-638* _____ 1,500
Elongation % *ASTM D-638* _____ 200
Specific Gravity _____ 1.35
ASTM D-792
Low Temperature flex (-67°F/-55°C) _____ No Cracking
MIL-DTL-23053
Heat Shock (482°F/250°C) _____ No Cracking
MIL-DTL-23053
Heat Resistance (347°F/175°C, 168 Hrs.) _____ 100
ASTM D-638
Secant Modulus PSI *ASTM D-882* _____ 25,000
Longitudinal Change _____ +5, -15
% MIL-DTL-23053
Dielectric Strength (volts/mil) _____ 500
ASTM D-876
Volume Resistivity (ohm-cm) _____ 1.0×10^{14}
ASTM D-876