



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# HA15-2 15.2mm Sub-miniature HV Reed Switch

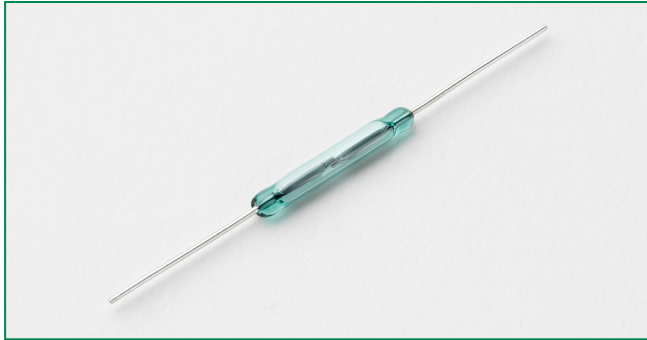

## Description

The HA15-2 Reed Switch is a sub-miniature, normally open switch with a 15.24mm long x 2.28mm diameter (0.600" x 0.090") glass envelope and capable of high voltage switching of 265Vac at 10VA. It has high insulation resistance of 10<sup>10</sup> ohms minimum and contact resistance less than 100 milli-ohms. It can handle light inductive loads with no suppression circuitry and switch European mains voltage.

## Features


- Sub-miniature normally open switch
- Capable of switching 100-265Vac or 0.3A up to 20VA loads outside of this window is rated 10W max (see Electrical Ratings)
- Minimum voltage breakdown 400Vdc (17-23AT) and 450Vdc (22+ AT)
- Available sensitivity range 17-33 AT

## Agency Approvals

| Agency | Agency File Number  | Ampere-Turns Range |
|--------|---------------------|--------------------|
|        | E47258<br>E471070   | 17-33 AT           |
|        | DEMKO 14 ATEX 1393U | 17-33 AT           |

## Dimensions

Dimensions in mm (inch)

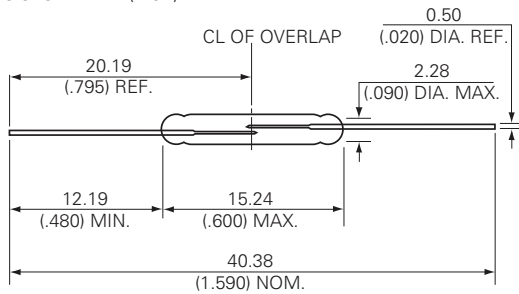

## Benefits

- Hermetically sealed switch contacts are not affected by and have no effect on their external environment
- Capable of switching European mains voltage
- Zero operating power required for contact closure

## Applications

- Reed Relays
- Security
- Limit Switching
- Office Equipment
- Light Inductive Loads
- European Mains Voltage Switching

## Switch Type

|              |   |
|--------------|---|
| Contact Form | A (SPST-NO)                                 |
| Materials    | Body: Glass<br>Leads: Tin-plated Ni-Fe wire |

Note: SPST-NO = Single-pole, single-throw, normally open

## Electrical Ratings

| Sensitivity <sup>6</sup>    |                             |             | 17-23  | 22+              |
|-----------------------------|-----------------------------|-------------|--|------------------|
| Contact Rating <sup>1</sup> |                             | W/VA - max. | 20W for 100-265 VAC loads<br>10W for all other loads |                  |
| Voltage <sup>3</sup>        | Switching <sup>2</sup>      | Vdc - max.  | 200  | 200              |
|                             | Breakdown <sup>4</sup>      | Vac - max.  | 265 rms  | 265 rms          |
| Current <sup>3</sup>        | Switching <sup>2</sup>      | Vdc - min.  | 400  | 450              |
|                             |                             | Adc - max.  | 0.40   | 0.50             |
|                             | Carry                       | Aac - max.  | 0.30   | 0.35             |
| Resistance                  | Contact, Initial Insulation | Adc - max.  | 1.4  | 1.5              |
|                             |                             | Ω - max.    | 0.100  | 0.100            |
| Capacitance                 | Contact                     | Ω - min.    | 10 <sup>10</sup>                                     | 10 <sup>10</sup> |
|                             |                             | pF - typ.   | 0.2  | 0.2              |
| Temperature                 | Operating                   | °C          | -20 to +125  | -20 to +125      |
|                             | Storage <sup>5</sup>        | °C          | -65 to +125  | -65 to +125      |

Notes:

1. Contact rating - Product of the switching voltage and current should never exceed the wattage rating. Contact Littelfuse for additional load/life information.
2. When switching inductive and/or capacitive loads, the effects of transient voltages and/or currents should be considered. Refer to Application Notes AN108A and AN107 for details.
3. Electrical Load Life Expectancy - Contact Littelfuse with voltage and current values along with type of load.
4. Breakdown Voltage - Per MIL-STD-202, Method 301.
5. Storage Temperature - Long time exposure at elevated temperature may degrade solderability of the lead.
6. Rating Sensitivity - The value at which contact ratings and operating characteristics are determined. Derating may be required for lower values.

## HA15-2 15.2mm Sub-miniature HV Reed Switch


### Product Characteristics

| Operating Characteristics       |                    |               |
|---------------------------------|--------------------|---------------|
| Operate Time <sup>1</sup>       |                    | 0.6ms - max.  |
| Release Time <sup>1</sup>       |                    | 0.2ms - max.  |
| Shock <sup>2</sup>              | 11ms 1/2 sine wave | 100G - max.   |
| Vibration <sup>2</sup>          | 50-2000 Hertz      | 30G - max.    |
| Resonant Frequency              |                    | 4.0kHz - typ. |
| Magnetic Characteristics        |                    |               |
| Pull-In Range <sup>3</sup>      | Ampere Turns       | 17-33         |
| Rating Sensitivity <sup>4</sup> | Ampere Turns       | 17 and 23     |
| Test Coil                       |                    | L4989         |

**Notes:**


- Operate (including bounce)/Release Time - per EIA/NARM RS-421-A, diode suppressed coil (Coil II).
- Shock and Vibration - per EIA/NARM RS-421-A and MIL-STD-202.
- Pull-In Range - Contact Littelfuse for narrower AT ranges available.
- Rating Sensitivity - The value at which contact ratings and operating characteristics are determined. Derating may be required below this value.
- Custom modifications of forming and/or cutting of reed switches are available. Please contact Littelfuse.

### Drop-Out vs. Pull-In Chart

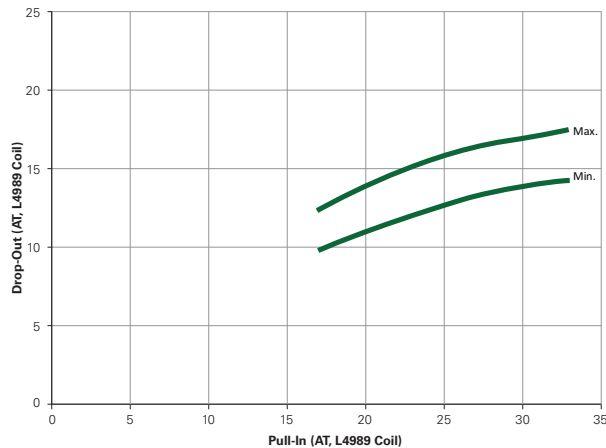

Note: Chart represents the range of Drop-Out, min to max for a given Pull-In value.

### Part Numbering System

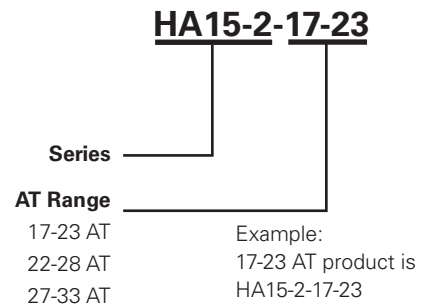

Note: These AT values are the before-modification values of the bare reed switch.

### Packaging

| Packaging Option | Packaging Specification | Quantity | Quantity & Packaging Code | Taping Width |
|------------------|-------------------------|----------|---------------------------|--------------|
| Bulk             | Bulk                    | 1000     | N/A                       | N/A          |