



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HAL 2xy

April/2009

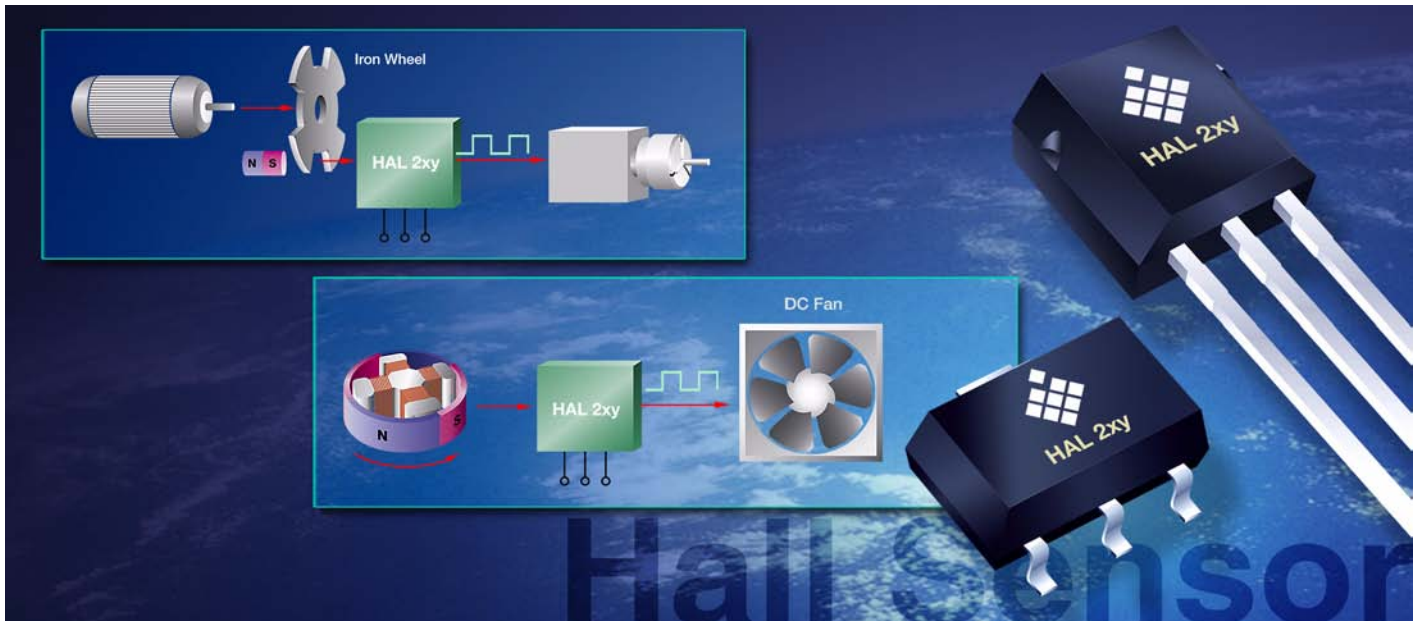

HAL 2xy Low-Cost Hall-Effect Sensor Family

The HAL 2xy Hall switch family is produced in CMOS technology. The sensors include a temperature-compensated Hall plate with active offset compensation, a comparator, and an open-drain output transistor.

The comparator compares the actual magnetic flux through the Hall plate (Hall voltage) with the fixed reference values (switching points). Accordingly, the output transistor is switched on or off.

The active offset compensation leads to magnetic parameters which are robust against mechanical stress effects. In addition, the magnetic characteristics are constant in the full supply voltage and temperature range.

The sensors are designed for industrial and automotive applications and operate with supply voltages from 3.8 V to 24 V in the ambient temperature range from -40 °C up to 125 °C.

The HAL 2xy family is available in the SOT89B SMD package and in the leaded TO92UA package.

Features

- ◆ Operates from 3.8 V to 24 V supply voltage
- ◆ Operates with static magnetic fields and dynamic magnetic fields up to 10 kHz
- ◆ Overvoltage protection at all pins
- ◆ Reverse-voltage protection at V_{DD} pin
- ◆ Magnetic characteristics are robust against mechanical stress effects
- ◆ Short-circuit protected open-drain output by thermal shut down
- ◆ Constant switching points over a wide supply voltage and temperature range
- ◆ The decrease of magnetic flux density caused by rising temperature in the sensor system is compensated by a built-in negative temperature coefficient of the magnetic characteristics
- ◆ High temperature stability for automotive or industrial applications
- ◆ High ESD rating

Major Applications

The HAL 2xy is the optimal system solution for applications, such as:

- ◆ Endposition detection
- ◆ RPM measurement of motors in various applications, such as power window
- ◆ Brushless DC motors
- ◆ RPM measurements in flow meters
- ◆ Replacement of micro switches

HAL 2xy

April/2009

Available Types and Behavior

Type	Switching Behavior	Sensitivity	Power-on and Undervoltage Reset
HAL 201	unipolar	low	–
HAL 202	latching	high	–
HAL 203	latching	medium	–
HAL 204	latching	low	–
HAL 206	unipolar	high	–
HAL 207	unipolar	low	–
HAL 208	unipolar	medium	–
HAL 210	unipolar	high	–
HAL 220	latching	high	•
HAL 221	unipolar	low	•

System Architecture

The Hall-effect sensor is a monolithic integrated circuit that switches in response to magnetic fields. If a magnetic field with flux lines perpendicular to the sensitive area is applied to the sensor, the biased Hall plate forces a Hall voltage proportional to this field. The Hall voltage is compared with the actual threshold level in the comparator.

The temperature-dependent bias is used to compensate the decreasing induction of magnets at higher temperatures. If the magnetic field exceeds the threshold levels, the open-drain output switches to the appropriate state. The built-in hysteresis eliminates oscillation and provides switching behavior of output without bouncing.

Magnetic offset caused by mechanical stress is compensated for by using the “switching offset compensation technique”.

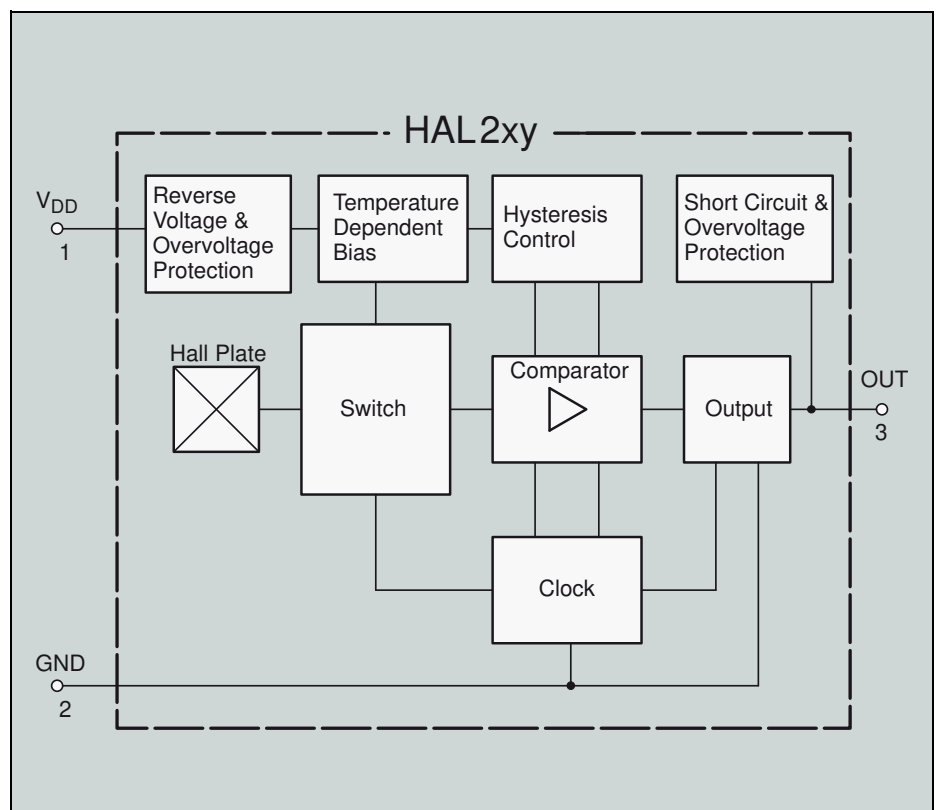


Fig. 1: Block diagram of the HAL 2xy

All information and data contained in this product information are without any commitment, are not to be considered as an offer for conclusion of a contract, nor shall they be construed as to create any liability. Product or development sample availability and delivery are exclusively subject to our respective order confirmation form. By this publication, Micronas GmbH does not assume responsibility for patent infringements or other rights of third parties which may result from its use.

No part of this publication may be reproduced, photocopied, stored on a retrieval system, or transmitted without the express written consent of Micronas GmbH.

Edition April 6, 2009; Order No. PI000010_002EN