



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Model HB Horizontal Stacking Banana Plug Patch Cord, Banana Plug Each End

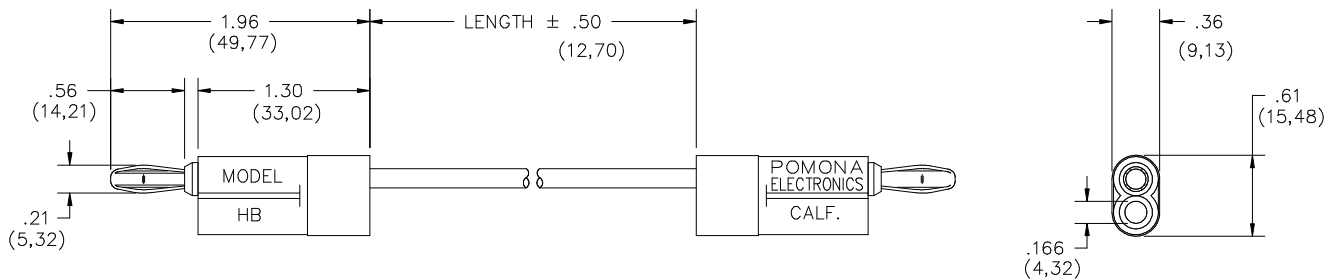

FEATURES:

- Front and vertical stacking banana plug.
- Mates to standard banana jacks.
- Ideal for providing jumpers on chassis boxes

MATERIALS:

Conn: Extension Stacking Banana Plug

Material: Spring, Beryllium Copper per QQ-C-533, Berylco 25, Cond. HT.

Plug Body and Plug Jack: Brass, per QQ-B-626, Alloy 360, ½ hard.

Finish: Nickel plate per QQ-N-290 class 2 (.0002 min.).

Insulation: Polypropylene molded to plug body, plug jack and wire

Color: Matches color of wire.

Marking: "MODEL HB-XX"

Wire: 18 AWG, stranding 65 x 36 t.c., PVC insulated (.050 wall thickness).

Color: See Ordering Information

Marking: "POMONA HB-XX-*

RATINGS: (Entire Assembly)

Operating Temperature: +55°C (+131°F) Max

Voltage: Hand-held testing: 33VRMS/70VDC Max

Hands free testing in controlled voltage environments: 5000 WVDC Max

Current: 15 Amperes Cont.

Contact Res.: Less than .001 Ohms per Banana Plug

ORDERING INFORMATION: Model HB-XX-*

XX = Cable Lengths, Standard Lengths: 12" (305mm), 24" (610mm), 36" (914mm), 48" (1219mm)

Additional lengths can be quoted upon request.

*= Color, -0 Black, -2 Red.

Ordering Example: HB-48-2, Indicates 48" in length, color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA