



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






# HCF4089B

## BINARY RATE MULTIPLIER

- CASCADABLE IN MULTIPLES OF 4-BITS
- SET TO "15" INPUT AND "15" DETECT OUTPUT
- QUIESCENT CURRENT SPECIFIED UP TO 20V
- STANDARDIZED SYMMETRICAL OUTPUT CHARACTERISTICS
- 5V, 10V AND 15V PARAMETRIC RATINGS
- INPUT LEAKAGE CURRENT  
 $I_l = 100\text{nA (MAX) AT } V_{DD} = 18\text{V } T_A = 25^\circ\text{C}$
- 100% TESTED FOR QUIESCENT CURRENT
- MEETS ALL REQUIREMENTS OF JEDEC JESD13B "STANDARD SPECIFICATIONS FOR DESCRIPTION OF B SERIES CMOS DEVICES"

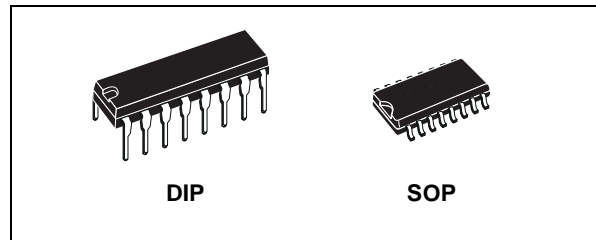

### ORDER CODES

| PACKAGE | TUBE       | T & R         |
|---------|------------|---------------|
| DIP     | HCF4089BEY |               |
| SOP     | HCF4089BM1 | HCF4089M013TR |


### DESCRIPTION

HCF4089B is a monolithic integrated circuit fabricated in Metal Oxide Semiconductor technology available in DIP and SOP packages. HCF4089B is a low power 4-bit digital rate multiplier that provides an output pulse rate that is the clock input pulse rate multiplied by 1/16 times the binary input. For example, when the binary input number is 13, there will be 13 output pulses for every 16 input pulses. HCF4089B has an internal synchronous 4-bit counter, which, together with one of the four


binary inputs bits, produces pulse trains as shown in the timing diagram.

If more than one binary input bit is high, the resulting pulse train is a combination of the above separate pulse trains. This device may be used to perform arithmetic operations (add, subtract, divide, raise to a power), solve algebraical and differential equations, generate natural logarithms and trigonometric functions, A/D and D/A conversions, and frequency division.

### PIN CONNECTION

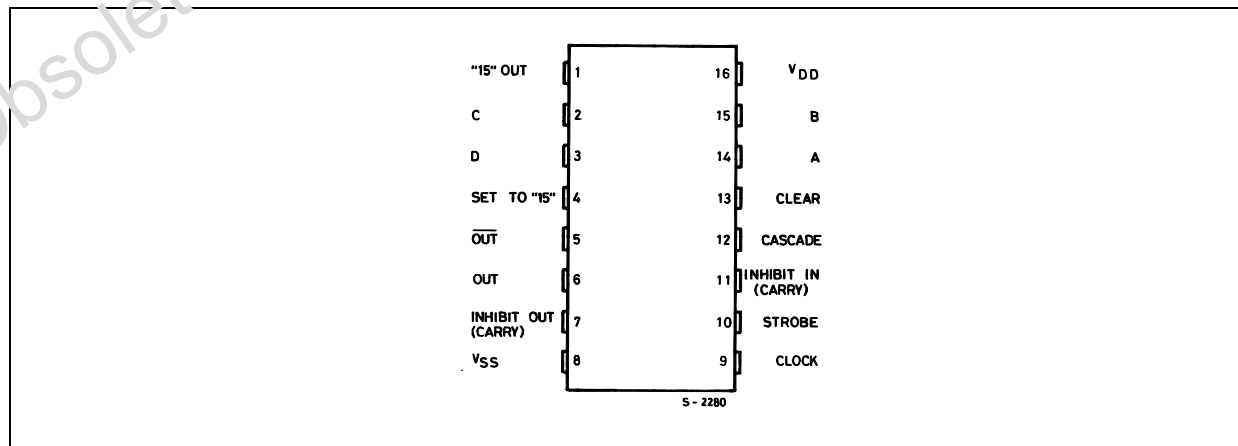


**IINPUT EQUIVALENT CIRCUIT**

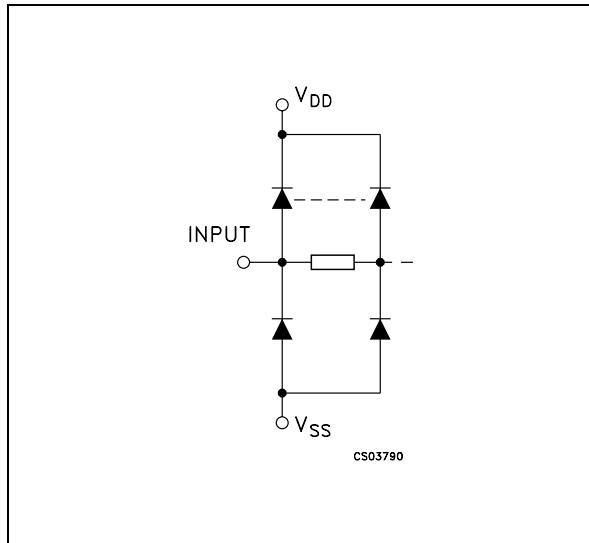

**PIN DESCRIPTION**

| PIN No       | SYMBOL                  | NAME AND FUNCTION         |
|--------------|-------------------------|---------------------------|
| 14, 15, 2, 3 | A, B, C, D              | Binary Rate Select Inputs |
| 5            | $\overline{\text{OUT}}$ | Rate Output               |
| 6            | OUT                     | Rate Output               |
| 4            | SET TO "15"             | Set Input                 |
| 1            | "15" OUT                | Output                    |
| 7            | INHIBIT OUT (CARRY)     | Inhibit Out (Carry)       |
| 13           | CLEAR                   | Clear Input               |
| 12           | CASCADE                 | Cascade                   |
| 11           | INHIBIT IN (CARRY)      | Inhibit Input (Carry)     |
| 10           | STROBE                  | Strobe                    |
| 9            | CLOCK                   | Clock Input               |
| 8            | $V_{SS}$                | Negative Supply Voltage   |
| 16           | $V_{DD}$                | Positive Supply Voltage   |

**FUNCTIONAL DIAGRAM**

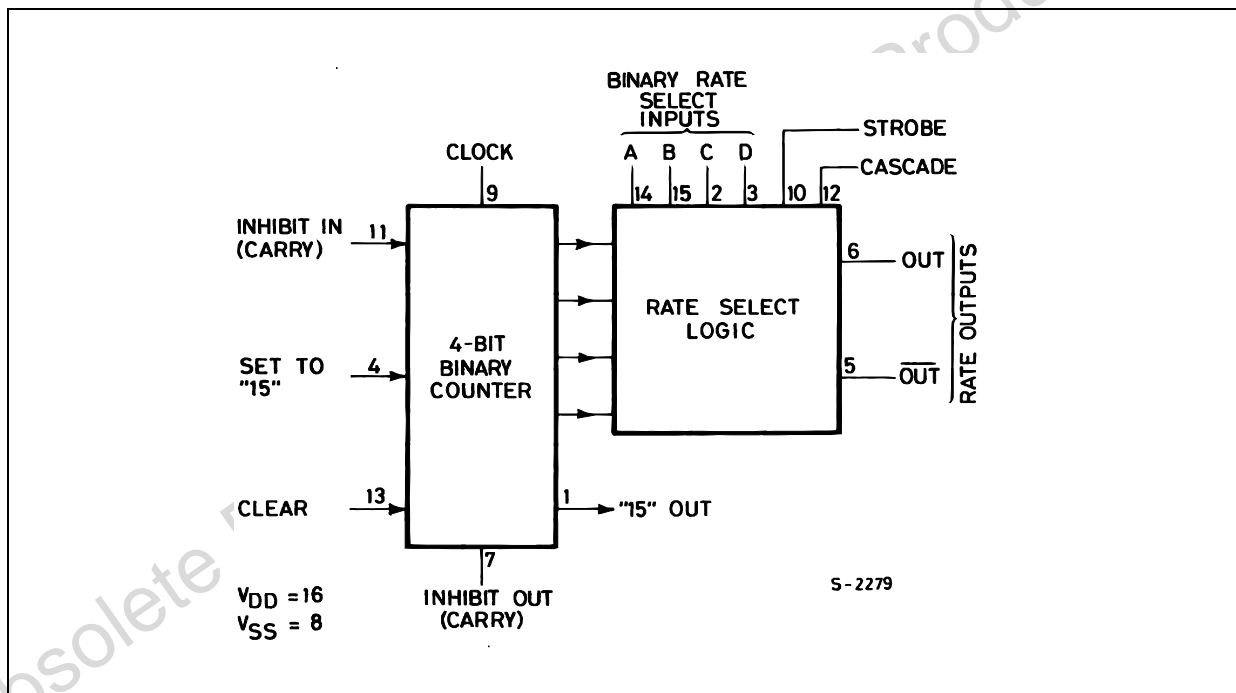

TRUTH TABLE


| INPUTS                                |   |   |   |       |        |      |      |       |     | OUTPUTS                                |                         |         |          |
|---------------------------------------|---|---|---|-------|--------|------|------|-------|-----|--|-------------------------|---------|----------|
| Number of Pulses or Input Logic Level |   |   |   |       |        |      |      |       |     | Number of Pulses or Output Logic Level |                         |         |          |
| D                                     | C | B | A | CLOCK | INH IN | STR. | CAS. | CLEAR | SET | OUT                                    | $\overline{\text{OUT}}$ | INH OUT | "15" OUT |
| L                                     | L | L | L | 16    | L      | L    | L    | L     | L   | L                                      | H                       | 1       | 1        |
| L                                     | L | L | H | 16    | L      | L    | L    | L     | L   | 1                                      | 1                       | 1       | 1        |
| L                                     | L | H | L | 16    | L      | L    | L    | L     | L   | 2                                      | 2                       | 1       | 1        |
| L                                     | L | H | H | 16    | L      | L    | L    | L     | L   | 3                                      | 3                       | 1       | 1        |
| L                                     | H | L | L | 16    | L      | L    | L    | L     | L   | 4                                      | 4                       | 1       | 1        |
| L                                     | H | L | H | 16    | L      | L    | L    | L     | L   | 5                                      | 5                       | 1       | 1        |
| L                                     | H | H | L | 16    | L      | L    | L    | L     | L   | 6                                      | 6                       | 1       | 1        |
| L                                     | H | H | H | 16    | L      | L    | L    | L     | L   | 7                                      | 7                       | 1       | 1        |
| H                                     | L | L | L | 16    | L      | L    | L    | L     | L   | 8                                      | 8                       | 1       | 1        |
| H                                     | L | L | H | 16    | L      | L    | L    | L     | L   | 9                                      | 9                       | 1       | 1        |
| H                                     | L | H | L | 16    | L      | L    | L    | L     | L   | 10                                     | 10                      | 1       | 1        |
| H                                     | L | H | H | 16    | L      | L    | L    | L     | L   | 11                                     | 11                      | 1       | 1        |
| H                                     | H | L | L | 16    | L      | L    | L    | L     | L   | 12                                     | 12                      | 1       | 1        |
| H                                     | H | L | H | 16    | L      | L    | L    | L     | L   | 13                                     | 13                      | 1       | 1        |
| H                                     | H | H | L | 16    | L      | L    | L    | L     | L   | 14                                     | 14                      | 1       | 1        |
| H                                     | H | H | H | 16    | L      | L    | L    | L     | L   | 15                                     | 15                      | 1       | 1        |
| X                                     | X | X | X | 16    | H      | L    | L    | L     | L   | •                                      | •                       | H       | •        |
| X                                     | X | X | X | 16    | L      | H    | L    | L     | L   | L                                      | H                       | 1       | 1        |
| X                                     | X | X | X | 16    | L      | L    | H    | L     | L   | H                                      | *                       | 1       | 1        |
| H                                     | X | X | X | 16    | L      | L    | L    | H     | L   | 16                                     | 16                      | H       | L        |
| L                                     | X | X | X | 16    | L      | L    | L    | H     | L   | L                                      | H                       | H       | L        |
| X                                     | X | X | X | 16    | L      | L    | L    | L     | H   | L                                      | H                       | L       | H        |

X : Don't Care


• : Depends on internal state of counter

\*: Output same as the first 16 lines of this truth table (depending on values of A, B, C, D)

LOGIC DIAGRAM

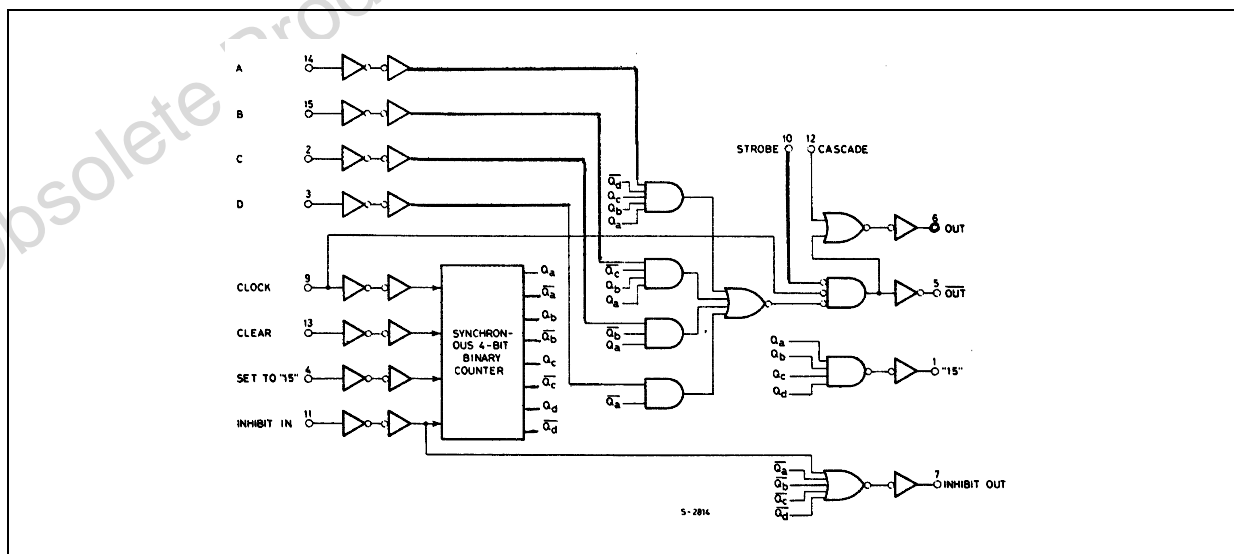

**TIMING CHART**

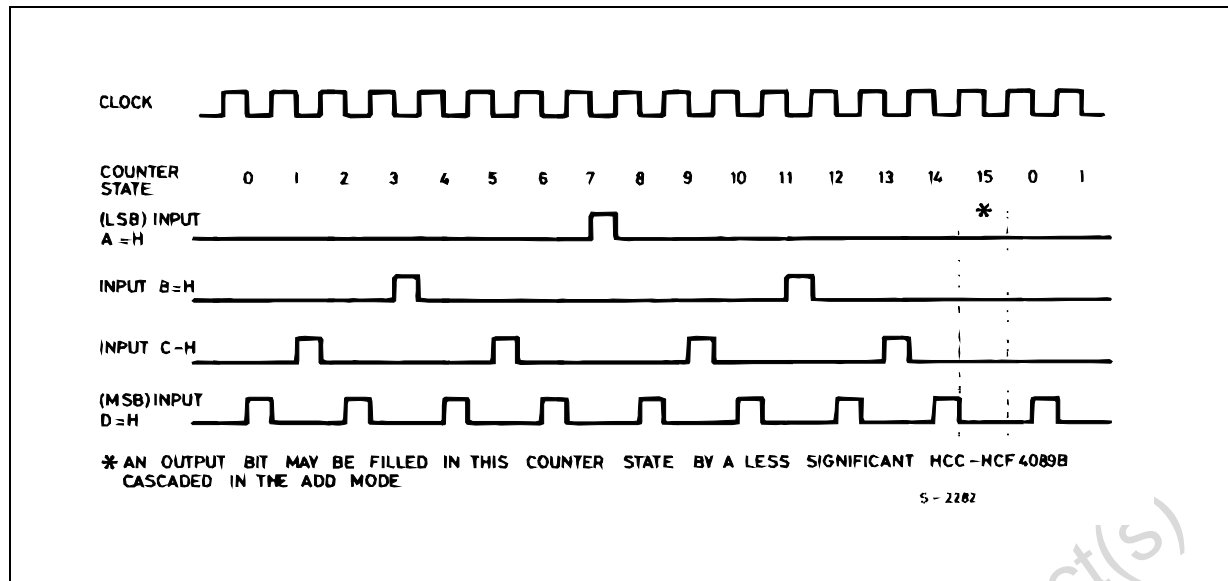

**ABSOLUTE MAXIMUM RATINGS**

| Symbol    | Parameter                               | Value                  | Unit        |
|-----------|---|------------------------|-------------|
| $V_{DD}$  | Supply Voltage                          | -0.5 to +22            | V           |
| $V_I$     | DC Input Voltage                        | -0.5 to $V_{DD} + 0.5$ | V           |
| $I_I$     | DC Input Current                        | $\pm 10$               | mA          |
| $P_D$     | Power Dissipation per Package           | 200                    | mW          |
|           | Power Dissipation per Output Transistor | 100                    | mW          |
| $T_{op}$  | Operating Temperature                   | -55 to +125            | $^{\circ}C$ |
| $T_{stg}$ | Storage Temperature                     | -65 to +150            | $^{\circ}C$ |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

All voltage values are referred to  $V_{SS}$  pin voltage.

**RECOMMENDED OPERATING CONDITIONS**

| Symbol   | Parameter             | Value         | Unit        |
|----------|-----------------------|---------------|-------------|
| $V_{DD}$ | Supply Voltage        | 3 to 20       | V           |
| $V_I$    | Input Voltage         | 0 to $V_{DD}$ | V           |
| $T_{op}$ | Operating Temperature | -55 to 125    | $^{\circ}C$ |

## DC SPECIFICATIONS

| Symbol          | Parameter                 | Test Condition        |                       |                                 |                        | Value                 |               |           |             |         |              | Unit    |         |
|-----------------|---------------------------|-----------------------|-----------------------|---------------------------------|------------------------|-----------------------|---------------|-----------|-------------|---------|--------------|---------|---------|
|                 |                           | V <sub>I</sub><br>(V) | V <sub>O</sub><br>(V) | I <sub>ol</sub>  <br>( $\mu$ A) | V <sub>DD</sub><br>(V) | T <sub>A</sub> = 25°C |               |           | -40 to 85°C |         | -55 to 125°C |         |         |
|                 |                           |                       |                       |                                 |                        | Min.                  | Typ.          | Max.      | Min.        | Max.    | Min.         |         | Max.    |
| I <sub>L</sub>  | Quiescent Current         | 0/5                   |                       |                                 | 5                      |                       | 0.04          | 5         |             | 150     |              | 150     | $\mu$ A |
|                 |                           | 0/10                  |                       |                                 | 10                     |                       | 0.04          | 10        |             | 300     |              | 300     |         |
|                 |                           | 0/15                  |                       |                                 | 15                     |                       | 0.04          | 20        |             | 600     |              | 600     |         |
|                 |                           | 0/20                  |                       |                                 | 20                     |                       | 0.08          | 100       |             | 3000    |              | 3000    |         |
| V <sub>OH</sub> | High Level Output Voltage | 0/5                   |                       | <1                              | 5                      | 4.95                  |               |           | 4.95        |         | 4.95         |         | V       |
|                 |                           | 0/10                  |                       | <1                              | 10                     | 9.95                  |               |           | 9.95        |         | 9.95         |         |         |
|                 |                           | 0/15                  |                       | <1                              | 15                     | 14.95                 |               |           | 14.95       |         | 14.95        |         |         |
| V <sub>OL</sub> | Low Level Output Voltage  | 5/0                   |                       | <1                              | 5                      |                       | 0.05          |           |             | 0.05    |              | 0.05    | V       |
|                 |                           | 10/0                  |                       | <1                              | 10                     |                       | 0.05          |           |             | 0.05    |              | 0.05    |         |
|                 |                           | 15/0                  |                       | <1                              | 15                     |                       | 0.05          |           |             | 0.05    |              | 0.05    |         |
| V <sub>IH</sub> | High Level Input Voltage  |                       | 0.5/4.5               | <1                              | 5                      | 3.5                   |               |           | 3.5         |         | 3.5          |         | V       |
|                 |                           |                       | 1/9                   | <1                              | 10                     | 7                     |               |           | 7           |         | 7            |         |         |
|                 |                           |                       | 1.5/13.5              | <1                              | 15                     | 11                    |               |           | 11          |         | 11           |         |         |
| V <sub>IL</sub> | Low Level Input Voltage   |                       | 4.5/0.5               | <1                              | 5                      |                       |               | 1.5       |             | 1.5     |              | 1.5     | V       |
|                 |                           |                       | 9/1                   | <1                              | 10                     |                       |               | 3         |             | 3       |              | 3       |         |
|                 |                           |                       | 13.5/1.5              | <1                              | 15                     |                       |               | 4         |             | 4       |              | 4       |         |
| I <sub>OH</sub> | Output Drive Current      | 0/5                   | 2.5                   | <1                              | 5                      | -1.36                 | -3.2          |           | -1.1        |         | -1.1         |         | mA      |
|                 |                           | 0/5                   | 4.6                   | <1                              | 5                      | -0.44                 | -1            |           | -0.36       |         | -0.36        |         |         |
|                 |                           | 0/10                  | 9.5                   | <1                              | 10                     | -1.1                  | -2.6          |           | -0.9        |         | -0.9         |         |         |
|                 |                           | 0/15                  | 13.5                  | <1                              | 15                     | -3.0                  | -6.8          |           | -2.4        |         | -2.4         |         |         |
| I <sub>OL</sub> | Output Sink Current       | 0/5                   | 0.4                   | <1                              | 5                      | 0.44                  | 1             |           | 0.36        |         | 0.36         |         | mA      |
|                 |                           | 0/10                  | 0.5                   | <1                              | 10                     | 1.1                   | 2.6           |           | 0.9         |         | 0.9          |         |         |
|                 |                           | 0/15                  | 1.5                   | <1                              | 15                     | 3.0                   | 6.8           |           | 2.4         |         | 2.4          |         |         |
| I <sub>I</sub>  | Input Leakage Current     | 0/18                  | Any Input             |                                 | 18                     |                       | $\pm 10^{-5}$ | $\pm 0.1$ |             | $\pm 1$ |              | $\pm 1$ | $\mu$ A |
| C <sub>I</sub>  | Input Capacitance         |                       | Any Input             |                                 |                        |                       | 5             | 7.5       |             |         |              |         | pF      |

The Noise Margin for both "1" and "0" level is: 1V min. with V<sub>DD</sub>=5V, 2V min. with V<sub>DD</sub>=10V, 2.5V min. with V<sub>DD</sub>=15V

DYNAMIC ELECTRICAL CHARACTERISTICS (T<sub>amb</sub> = 25°C, C<sub>L</sub> = 50pF, R<sub>L</sub> = 200K $\Omega$ , t<sub>r</sub> = t<sub>f</sub> = 20 ns)

| Symbol                            | Parameter   | Test Condition      |  | Value (*) |      |      | Unit |
|-----------------------------------|---|---------------------|--|-----------|------|------|------|
|                                   |   | V <sub>DD</sub> (V) |  | Min.      | Typ. | Max. |      |
| t <sub>PHL</sub> t <sub>PLH</sub> | Propagation Delay Time<br>CLOCK to OUT                                | 5                   |  |           | 110  | 220  | ns   |
|                                   |   | 10                  |  |           | 55   | 110  |      |
|                                   |   | 15                  |  |           | 45   | 90   |      |
| t <sub>PHL</sub> t <sub>PLH</sub> | Propagation Delay Time<br>CLOCK or STROBE to<br>OUT                   | 5                   |  |           | 150  | 300  | ns   |
|                                   |   | 10                  |  |           | 75   | 150  |      |
|                                   |   | 15                  |  |           | 60   | 120  |      |
| t <sub>PHL</sub> t <sub>PLH</sub> | Propagation Delay Time<br>CLOCK to INHIBIT High<br>Level to Low Level | 5                   |  |           | 360  | 720  | ns   |
|                                   |   | 10                  |  |           | 160  | 320  |      |
|                                   |   | 15                  |  |           | 110  | 220  |      |
| t <sub>PHL</sub> t <sub>PLH</sub> | Propagation Delay Time<br>LOW Level to HIGH Level                     | 5                   |  |           | 250  | 500  | ns   |
|                                   |   | 10                  |  |           | 100  | 200  |      |
|                                   |   | 15                  |  |           | 75   | 150  |      |

## HCF4089B


| Symbol                            | Parameter  | Test Condition      |  | Value (*) |      |      | Unit |
|-----------------------------------|--|---------------------|--|-----------|------|------|------|
|                                   |  | V <sub>DD</sub> (V) |  | Min.      | Typ. | Max. |      |
| t <sub>PHL</sub> t <sub>PLH</sub> | Propagation Delay Time<br>CLEAR to OUT                   | 5                   |  |           | 380  | 760  | ns   |
|                                   |  | 10                  |  |           | 175  | 350  |      |
|                                   |  | 15                  |  |           | 130  | 260  |      |
| t <sub>PHL</sub> t <sub>PLH</sub> | Propagation Delay Time<br>CLOCK to "9" or "15" OUT       | 5                   |  |           | 300  | 600  | ns   |
|                                   |  | 10                  |  |           | 125  | 250  |      |
|                                   |  | 15                  |  |           | 90   | 180  |      |
| t <sub>PHL</sub> t <sub>PLH</sub> | Propagation Delay Time<br>CASCADE to OUT                 | 5                   |  |           | 90   | 180  | ns   |
|                                   |  | 10                  |  |           | 45   | 90   |      |
|                                   |  | 15                  |  |           | 35   | 70   |      |
| t <sub>PHL</sub> t <sub>PLH</sub> | Propagation Delay Time<br>INHIBIT IN to INHIBIT<br>OUT   | 5                   |  |           | 160  | 320  | ns   |
|                                   |  | 10                  |  |           | 75   | 150  |      |
|                                   |  | 15                  |  |           | 55   | 110  |      |
| t <sub>PHL</sub> t <sub>PLH</sub> | Propagation Delay Time<br>SET to OUT                     | 5                   |  |           | 330  | 660  | ns   |
|                                   |  | 10                  |  |           | 150  | 300  |      |
|                                   |  | 15                  |  |           | 110  | 220  |      |
| t <sub>THL</sub> t <sub>TLH</sub> | Transition Time  | 5                   |  |           | 100  | 200  | ns   |
|                                   |  | 10                  |  |           | 50   | 100  |      |
|                                   |  | 15                  |  |           | 40   | 80   |      |
| f <sub>CL</sub>                   | Maximum Clock<br>Frequency                               | 5                   |  | 1.2       | 2.4  |      | MHz  |
|                                   |  | 10                  |  | 2.5       | 5    |      |      |
|                                   |  | 15                  |  | 3.5       | 7    |      |      |
| t <sub>W</sub>                    | Clock Pulse Width  | 5                   |  | 330       | 165  |      | ns   |
|                                   |  | 10                  |  | 170       | 85   |      |      |
|                                   |  | 15                  |  | 100       | 50   |      |      |
| t <sub>r</sub> t <sub>f</sub>     | Clock Rise or Fall Time                                  | 5                   |  |           |      | 15   | μs   |
|                                   |  | 10                  |  |           |      | 15   |      |
|                                   |  | 15                  |  |           |      | 15   |      |
| t <sub>W</sub>                    | SET or CLEAR pulse<br>Width                              | 5                   |  | 160       | 80   |      | ns   |
|                                   |  | 10                  |  | 90        | 45   |      |      |
|                                   |  | 15                  |  | 60        | 30   |      |      |
| t <sub>setup</sub>                | INHIBIT Input Set-Up<br>Time, High Level to Low<br>Level | 5                   |  | 100       | 50   |      | ns   |
|                                   |  | 10                  |  | 40        | 20   |      |      |
|                                   |  | 15                  |  | 20        | 10   |      |      |
| t <sub>R</sub>                    | INHIBIT Input Removal<br>Time                            | 5                   |  | 240       | 120  |      | ns   |
|                                   |  | 10                  |  | 130       | 65   |      |      |
|                                   |  | 15                  |  | 110       | 55   |      |      |
| t <sub>R</sub>                    | Minimum SET Removal<br>Time                              | 5                   |  | 150       | 75   |      | ns   |
|                                   |  | 10                  |  | 80        | 40   |      |      |
|                                   |  | 15                  |  | 50        | 25   |      |      |
| t <sub>R</sub>                    | CLEAR Removal Time                                       | 5                   |  | 60        | 30   |      | ns   |
|                                   |  | 10                  |  | 40        | 20   |      |      |
|                                   |  | 15                  |  | 30        | 15   |      |      |

(\*) Typical temperature coefficient for all V<sub>DD</sub> value is 0.3 %/°C.

**APPLICATION NOTES**

For words of more than 4 bits, HCF4089B device may be cascaded in two different modes : an ADD mode and a MULTIPLY mode.


**TWO HCF4089B'S CASCADED IN THE "ADD" MODE WITH A PRESET NUMBER OF 189**

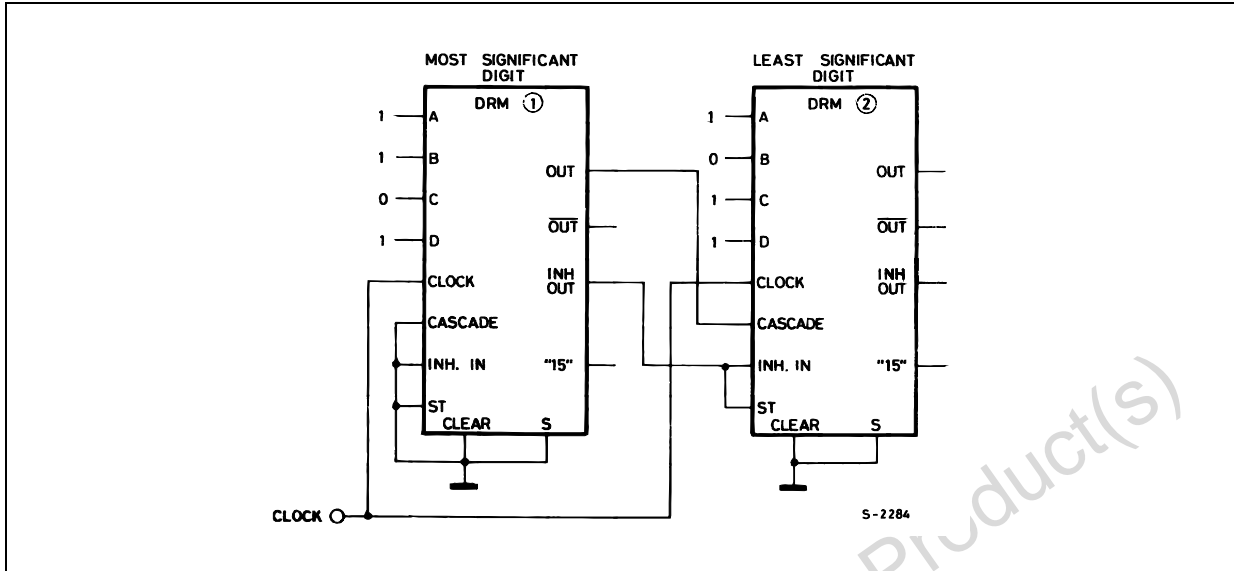

In the ADD mode some of the gaps left by the more significant unit at the count of 15 are filled in by the less significant units. For example, when two units are cascaded in the ADD mode and programmed to 11 and 13, respectively, the more significant unit will have 11 output pulses and the other unit will have 13 output pulses for every 256 input pulses for a total of :

$$\frac{11}{16} + \frac{13}{256} = \frac{189}{256}$$


**TWO HCF4089B'S CASCADED IN THE "MULTIPLY" MODE FOR MULTIPLICATION OF TWO VARIABLES A AND B WITH LOOP CIRCUIT CONTROL**

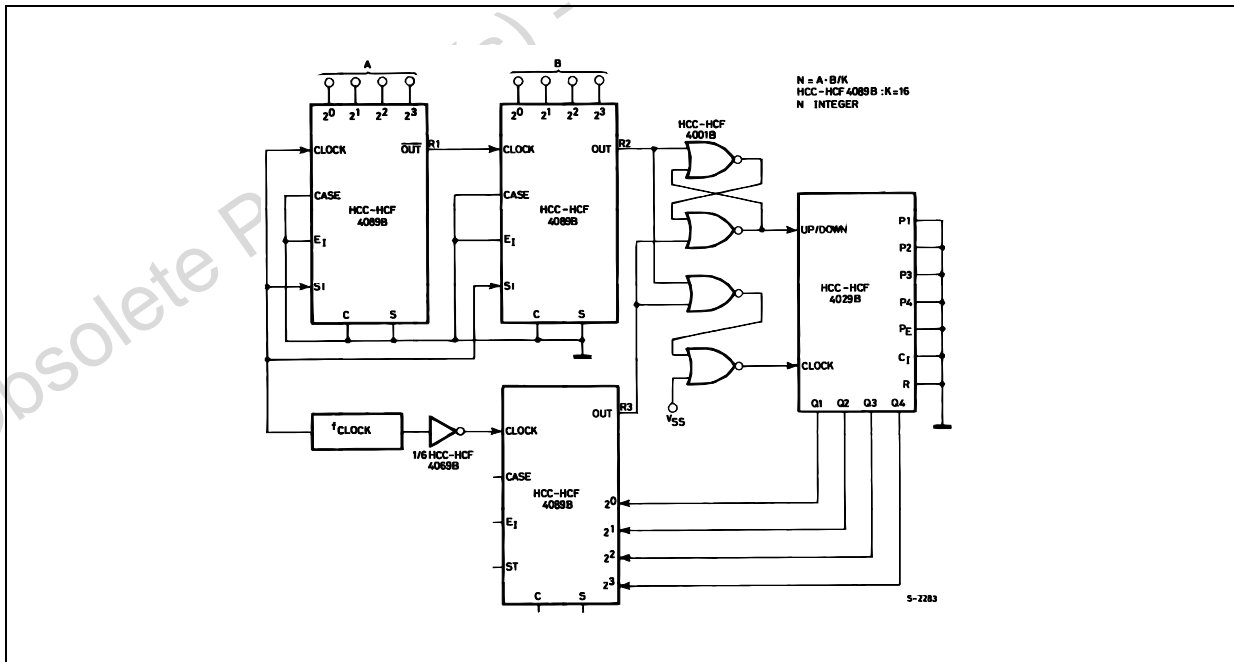

When the loop stabilities rate  $R2 = rate R3$ , thus  $f_{clock}(\frac{A}{16} \cdot \frac{B}{16}) = f_{clock}(\frac{1}{16} \cdot \frac{N}{16})$  therefore  $N = AB$



TEST CIRCUIT

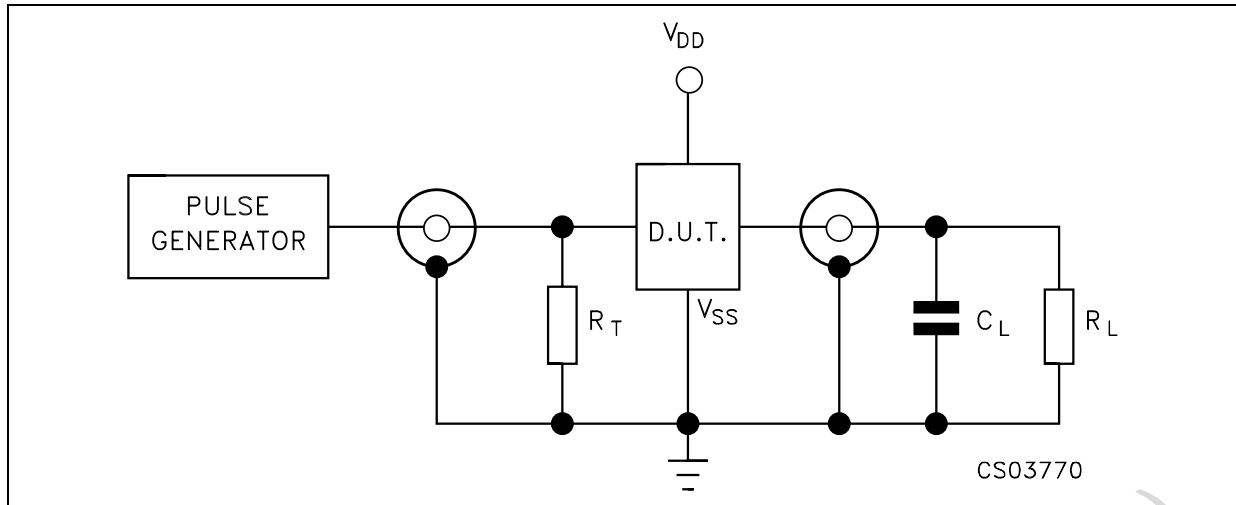


$C_L = 50\text{pF}$  or equivalent (includes jig and probe capacitance)  
 $R_L = 200\text{K}\Omega$   
 $R_T = Z_{OUT}$  of pulse generator (typically  $50\Omega$ )

Obsolete Product(s) - Obsolete Product(s)


**Plastic DIP-16 (0.25) MECHANICAL DATA**

| DIM. | mm.  |       |      | inch  |       |       |
|------|------|-------|------|-------|-------|-------|
|      | MIN. | TYP   | MAX. | MIN.  | TYP.  | MAX.  |
| a1   | 0.51 |       |      | 0.020 |       |       |
| B    | 0.77 |       | 1.65 | 0.030 |       | 0.065 |
| b    |      | 0.5   |      |       | 0.020 |       |
| b1   |      | 0.25  |      |       | 0.010 |       |
| D    |      |       | 20   |       |       | 0.787 |
| E    |      | 8.5   |      |       | 0.335 |       |
| e    |      | 2.54  |      |       | 0.100 |       |
| e3   |      | 17.78 |      |       | 0.700 |       |
| F    |      |       | 7.1  |       |       | 0.280 |
| I    |      |       | 5.1  |       |       | 0.201 |
| L    |      | 3.3   |      |       | 0.130 |       |
| Z    |      |       | 1.27 |       |       | 0.050 |

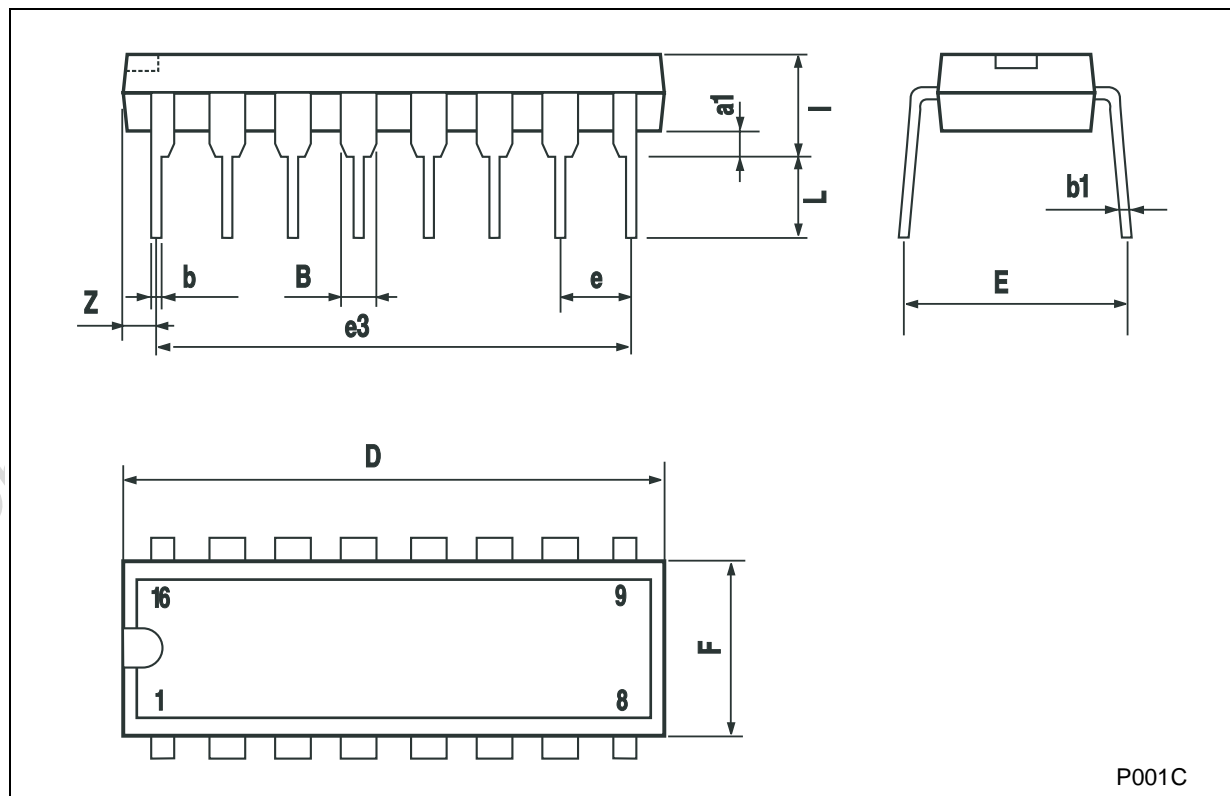

**SO-16 MECHANICAL DATA**

| DIM. | mm.        |      |      | inch  |       |       |
|------|------------|------|------|-------|-------|-------|
|      | MIN.       | TYP. | MAX. | MIN.  | TYP.  | MAX.  |
| A    |            |      | 1.75 |       |       | 0.068 |
| a1   | 0.1        |      | 0.2  | 0.003 |       | 0.007 |
| a2   |            |      | 1.65 |       |       | 0.064 |
| b    | 0.35       |      | 0.46 | 0.013 |       | 0.018 |
| b1   | 0.19       |      | 0.25 | 0.007 |       | 0.010 |
| C    |            | 0.5  |      |       | 0.019 |       |
| c1   | 45° (typ.) |      |      |       |       |       |
| D    | 9.8        |      | 10   | 0.385 |       | 0.393 |
| E    | 5.8        |      | 6.2  | 0.228 |       | 0.244 |
| e    |            | 1.27 |      |       | 0.050 |       |
| e3   |            | 8.89 |      |       | 0.350 |       |
| F    | 3.8        |      | 4.0  | 0.149 |       | 0.157 |
| G    | 4.6        |      | 5.3  | 0.181 |       | 0.208 |
| L    | 0.5        |      | 1.27 | 0.019 |       | 0.050 |
| M    |            |      | 0.62 |       |       | 0.024 |
| S    | 8° (max.)  |      |      |       |       |       |

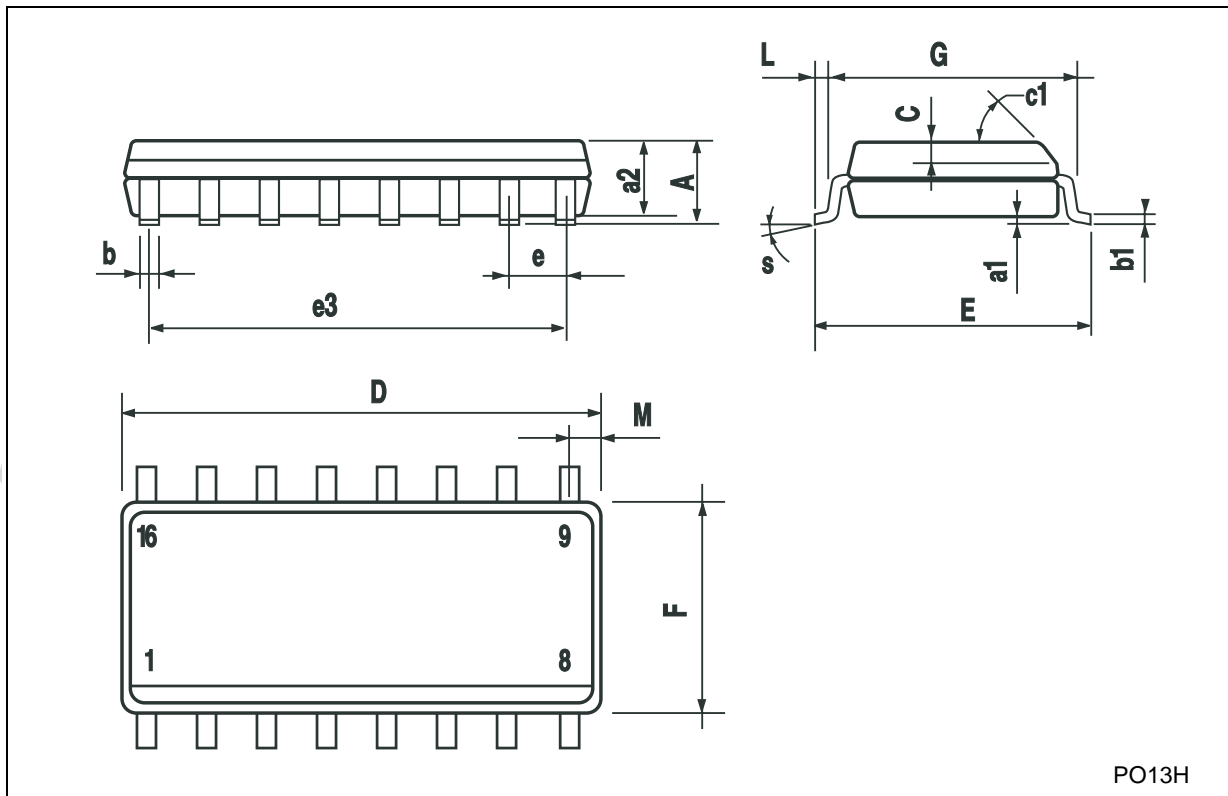

PO13H

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>