



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# HDSM-441x, HDSM-443x

0.39" (10.0mm)  
Dual digit surface mount LED display



## Data Sheet

### Description

The HDSM-441x/443x is a dual digit display of 0.39" (10.0mm) height. This device utilizes AlInGaP / GaAs chips and has a grey top surface with white segments.


### Features

- 0.39" digit height
- Low current operation
- Excellent characters appearance
- Available in CA and CC
- 500 pieces per reel
- Moisture sensitivity level: Level 3
- RoHS compliant

### Ordering Information

| Red       | Green     | Yellow    | Orange    | Description                        |
|-----------|-----------|-----------|-----------|------------------------------------|
| HDSM-441C | HDSM-441H | HDSM-441F | HDSM-441L | Common Anode, Right Hand Decimal   |
| HDSM-443C | HDSM-443H | HDSM-443F | HDSM-443L | Common Cathode, Right Hand Decimal |

### Package Dimensions

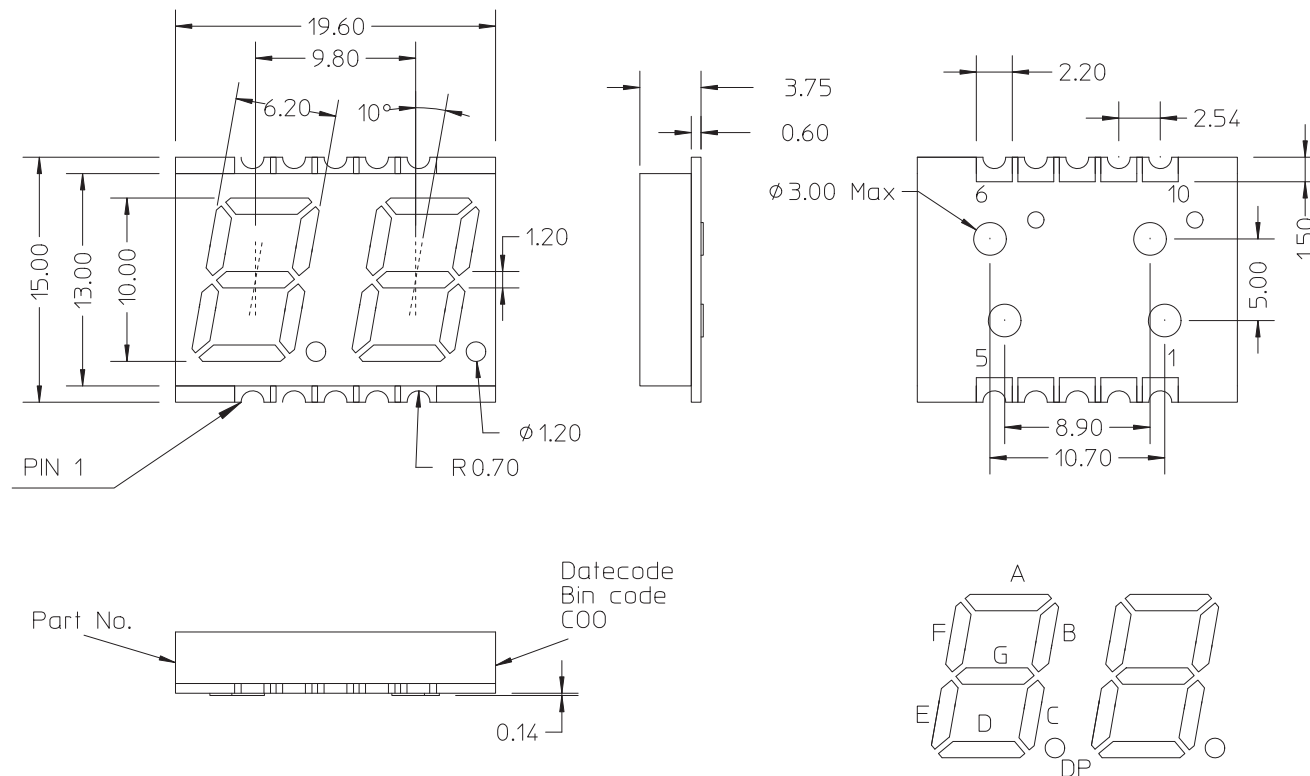

#### Note:

1. All dimensions are in millimeters.
2. Tolerance are +/- 0.25mm unless otherwise specified.


### Pin Connection (Common Anode)

| PIN No | Connection        |
|--------|-------------------|
| 1      | CATHODE G         |
| 2      | CATHODE DP        |
| 3      | CATHODE A         |
| 4      | CATHODE F         |
| 5      | COMMON ANODE DIG2 |
| 6      | CATHODE D         |
| 7      | CATHODE E         |
| 8      | CATHODE C         |
| 9      | CATHODE B         |
| 10     | COMMON ANODE DIG1 |


### Pin Connection (Common Cathode)

| PIN No | Connection           |
|--------|----------------------|
| 1      | ANODE G              |
| 2      | ANODE DP2            |
| 3      | ANODE A              |
| 4      | ANODE F              |
| 5      | COMMON CATHODE DIG2  |
| 6      | ANODE D              |
| 7      | ANODE E              |
| 8      | ANODE C              |
| 9      | ANODE B              |
| 10     | COMMON CATHODE DIG 1 |

### Internal Circuit Diagram (Common Anode)

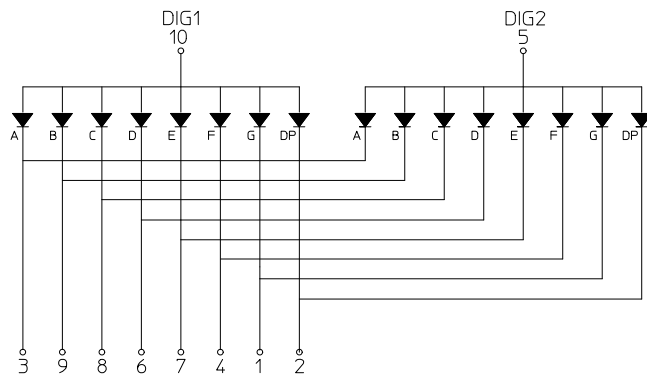

### Internal Circuit Diagram (Common Cathode)

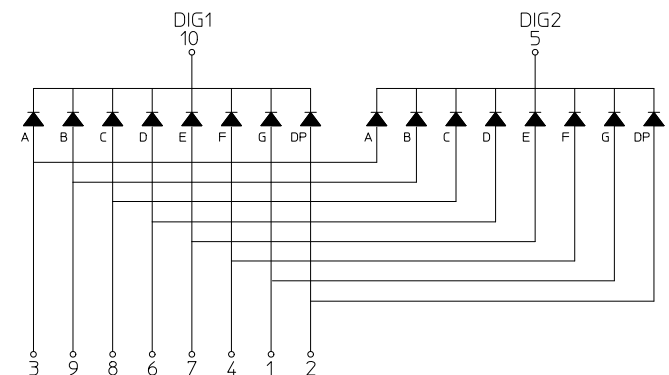

### Absolute Maximum Ratings @ $T_A=25^\circ$

| Parameter   | Green/Yellow/Red/Orange | Unit   |
|---|-------------------------|--------|
| Power Dissipation Per Segment   | 65                      | mW     |
| Peak Forward Current Per Segment<br>(1/10 Duty Cycle, .0.1ms pulse width) | 100                     | mA     |
| Continuous Forward Current Per Segment                                    | 25                      | mA     |
| Derating Linear From 25°C Per Segment                                     | 0.25                    | mA/ °C |
| Reverse Voltage Per Segment   | 5                       | V      |
| Operating Temperature Range   | -40°C to +105°C         |        |
| Storage Temperature Range   | -40°C to +105°C         |        |

## Electrical / Optical Characteristics @ T<sub>A</sub>=25°C

### Green

| Parameters                        | Symbol                         | Min | Typ     | Max | Unit | Test Condition        |
|-----------------------------------|--------------------------------|-----|---------|-----|------|-----------------------|
| Average Luminous Intensity        | I <sub>V</sub>                 | 5.4 | 9       | -   | mcd  | I <sub>F</sub> = 10mA |
| Emissions Wavelength              | λ <sub>p</sub> /λ <sub>d</sub> | -   | 572/571 | -   | nm   | I <sub>F</sub> = 20mA |
| Spectral Line Half-Width          | Δλ                             | -   | 20      | -   | nm   | I <sub>F</sub> = 20mA |
| Forward Voltage, Per Segment      | V <sub>F</sub>                 | -   | 2.1     | 2.6 | V    | I <sub>F</sub> = 20mA |
| Reverse Current, Per Segment      | I <sub>R</sub>                 | -   | -       | 100 | μA   | V <sub>R</sub> = 5V   |
| Luminous Intensity Matching Ratio | I <sub>V-M</sub>               | -   | -       | 2:1 | -    | I <sub>F</sub> = 10mA |

### Yellow

| Parameters                        | Symbol                         | Min | Typ     | Max | Unit | Test Condition        |
|-----------------------------------|--------------------------------|-----|---------|-----|------|-----------------------|
| Average Luminous Intensity        | I <sub>V</sub>                 | 8.6 | 15      | -   | mcd  | I <sub>F</sub> = 10mA |
| Emissions Wavelength              | λ <sub>p</sub> /λ <sub>d</sub> | -   | 591/589 | -   | nm   | I <sub>F</sub> = 20mA |
| Spectral Line Half-Width          | Δλ                             | -   | 15      | -   | nm   | I <sub>F</sub> = 20mA |
| Forward Voltage, Per Segment      | V <sub>F</sub>                 | -   | 2.1     | 2.6 | V    | I <sub>F</sub> = 20mA |
| Reverse Current, Per Segment      | I <sub>R</sub>                 | -   | -       | 100 | μA   | V <sub>R</sub> = 5V   |
| Luminous Intensity Matching Ratio | I <sub>V-M</sub>               | -   | -       | 2:1 | -    | I <sub>F</sub> = 10mA |

### Red

| Parameters                        | Symbol                         | Min | Typ     | Max | Unit | Test Condition        |
|-----------------------------------|--------------------------------|-----|---------|-----|------|-----------------------|
| Average Luminous Intensity        | I <sub>V</sub>                 | 8.6 | 14.3    | -   | mcd  | I <sub>F</sub> = 10mA |
| Emissions Wavelength              | λ <sub>p</sub> /λ <sub>d</sub> | -   | 644/630 | -   | nm   | I <sub>F</sub> = 20mA |
| Spectral Line Half-Width          | Δλ                             | -   | 20      | -   | nm   | I <sub>F</sub> = 20mA |
| Forward Voltage, Per Segment      | V <sub>F</sub>                 | -   | 2.0     | 2.6 | V    | I <sub>F</sub> = 20mA |
| Reverse Current, Per Segment      | I <sub>R</sub>                 | -   | -       | 100 | μA   | V <sub>R</sub> = 5V   |
| Luminous Intensity Matching Ratio | I <sub>V-M</sub>               | -   | -       | 2:1 | -    | I <sub>F</sub> = 10mA |

### Orange

| Parameters                        | Symbol                         | Min | Typ     | Max | Unit | Test Condition        |
|-----------------------------------|--------------------------------|-----|---------|-----|------|-----------------------|
| Average Luminous Intensity        | I <sub>V</sub>                 | 8.6 | 16      | -   | mcd  | I <sub>F</sub> = 10mA |
| Emissions Wavelength              | λ <sub>p</sub> /λ <sub>d</sub> | -   | 611/605 | -   | nm   | I <sub>F</sub> = 20mA |
| Spectral Line Half-Width          | Δλ                             | -   | 17      | -   | nm   | I <sub>F</sub> = 20mA |
| Forward Voltage, Per Segment      | V <sub>F</sub>                 | -   | 2.1     | 2.6 | V    | I <sub>F</sub> = 20mA |
| Reverse Current, Per Segment      | I <sub>R</sub>                 | -   | -       | 100 | μA   | V <sub>R</sub> = 5V   |
| Luminous Intensity Matching Ratio | I <sub>V-M</sub>               | -   | -       | 2:1 | -    | I <sub>F</sub> = 10mA |

Typical Electrical / Optical characteristic curves @  $T_A=25^\circ\text{C}$

Green

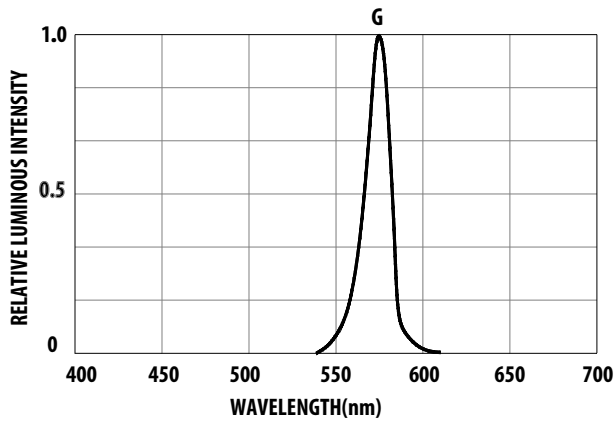


Figure 1. Relative Luminous Intensity vs. Wavelength

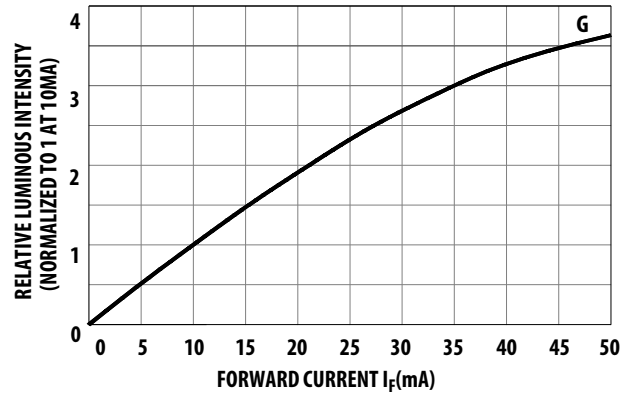


Figure 2. Relative Luminous Intensity vs. Forward Current

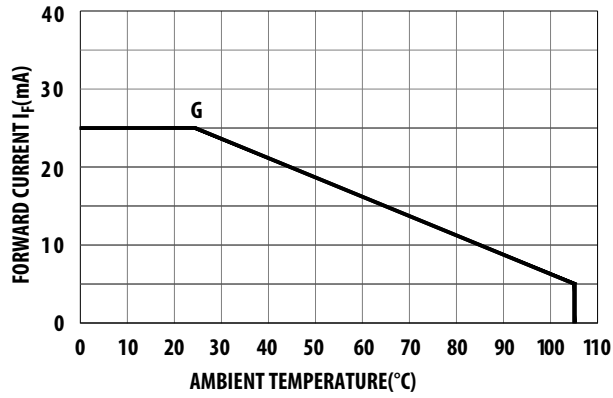


Figure 3. Allowable DC Current vs. Ambient Temperature

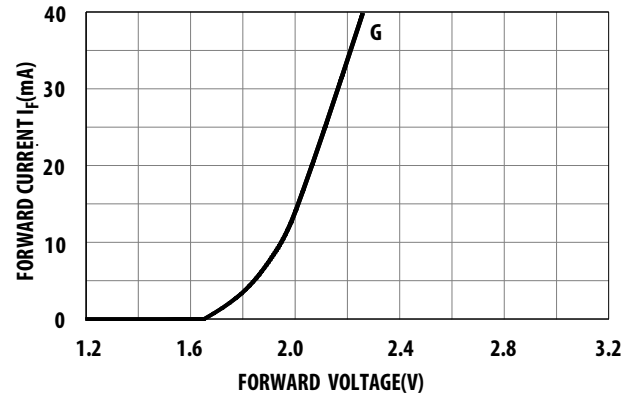


Figure 4. Forward Current vs. Forward Voltage

Yellow

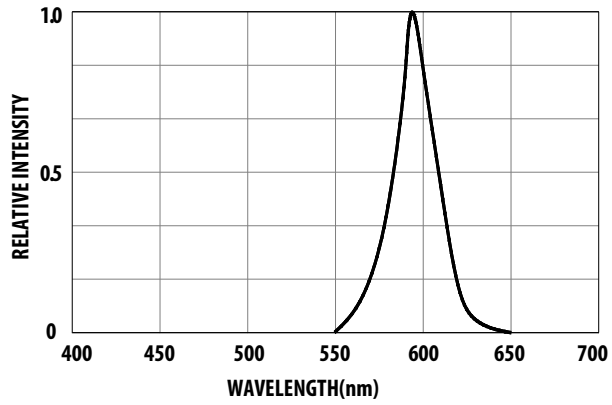


Figure 1. Relative Intensity vs. Wavelength

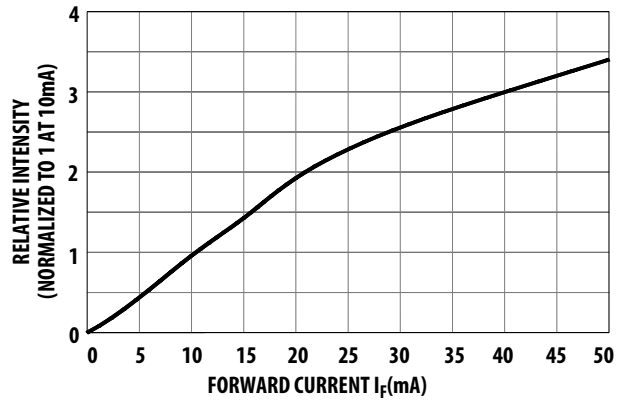


Figure 2. Relative Intensity vs. Forward Current

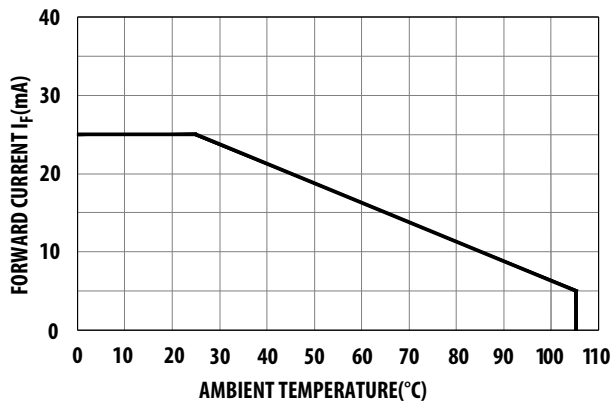


Figure 3. Allowable DC Current vs. Ambient Temperature

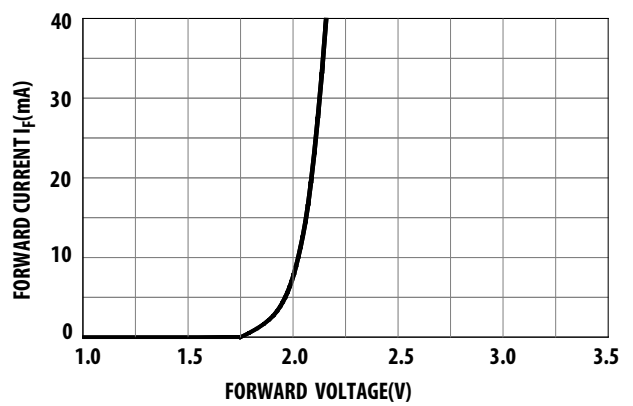


Figure 4. Forward Current vs. Forward Voltage

Red

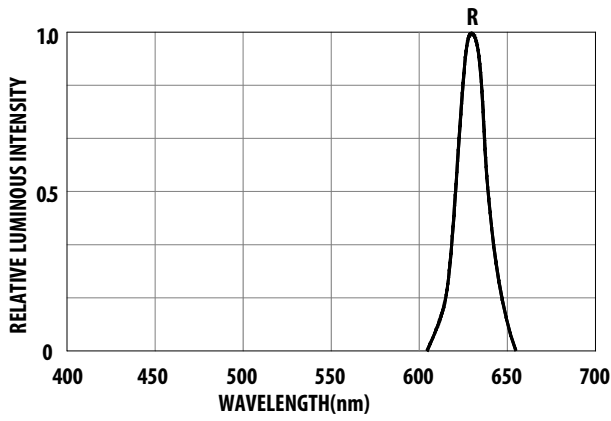


Figure 1. Relative Luminous Intensity vs. Wavelength

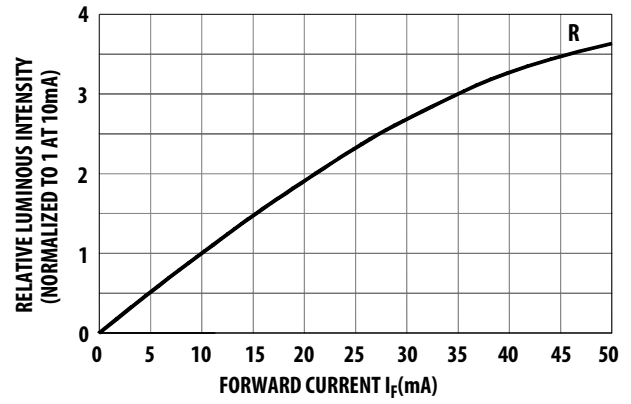


Figure 2. Relative Luminous Intensity vs. Forward Current

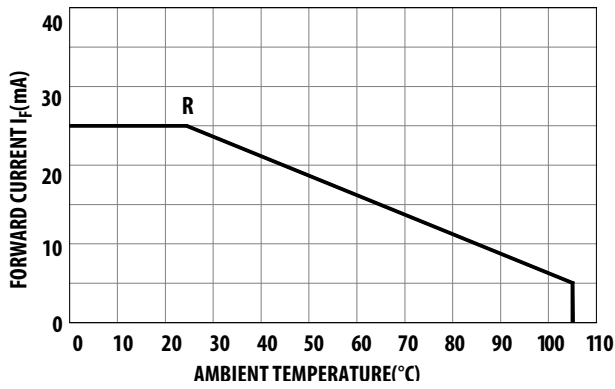


Figure 3. Allowable DC Current vs. Ambient Temperature

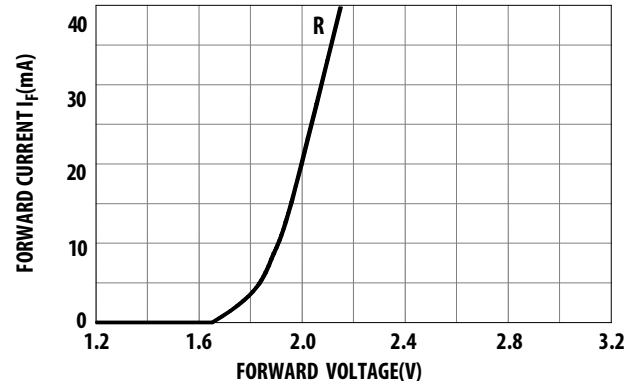


Figure 4. Forward Current vs. Forward Voltage

## Orange

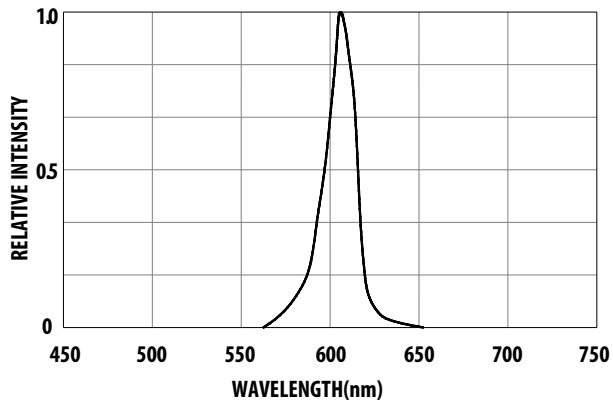


Figure 1. Relative Intensity vs. Wavelength

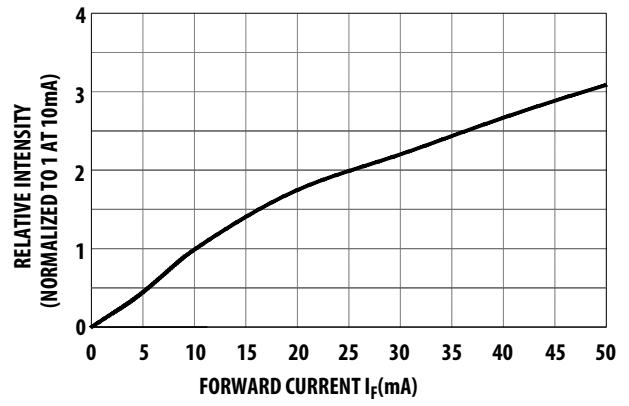


Figure 2. Relative Intensity vs. Forward Current

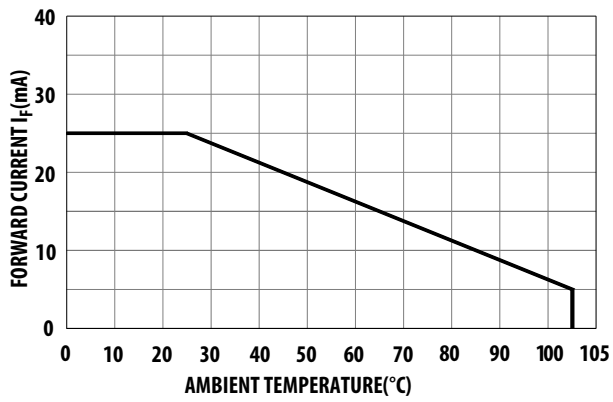


Figure 3. Allowable DC Current vs. Ambient Temperature

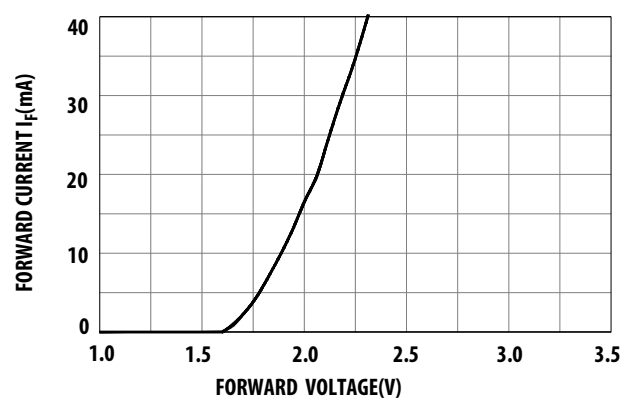


Figure 4. Forward Current vs. Forward Voltage



## Intensity Bin Limits (mcd)

### Green

| IV Bin Category | Min.   | Max.   |
|-----------------|--------|--------|
| M               | 5.401  | 8.600  |
| N               | 8.601  | 13.700 |
| P               | 13.701 | 21.8   |

Tolerance:  $\pm 15\%$

### Yellow / Red

| IV Bin Category | Min.   | Max.   |
|-----------------|--------|--------|
| N               | 8.601  | 13.700 |
| P               | 13.701 | 21.800 |
| Q               | 21.801 | 34.7   |

Tolerance:  $\pm 15\%$

### Orange

| IV Bin Category | Min.   | Max. |
|-----------------|--------|------|
| N               | 8.601  | 13.7 |
| P               | 13.701 | 21.8 |
| Q               | 21.801 | 34.7 |
| R               | 34.701 | 55.2 |


Tolerance:  $\pm 15\%$

#### Notes:

- Bin categories are established for classification of products. Products may not be available in all categories. Please contact your Avago representative for information on currently available bins.

## SMT Soldering Profile


### Pb free reflow soldering Profile

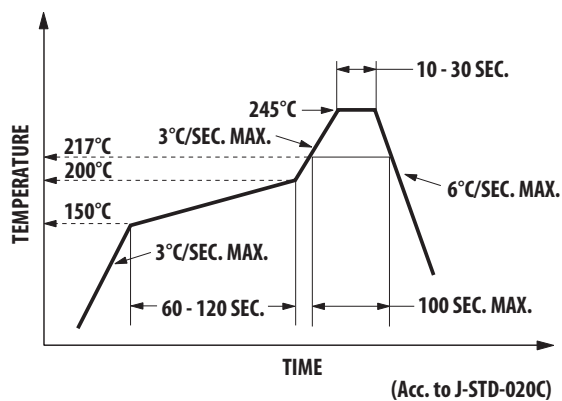


#### Notes:

- The peak temperature refers to the peak package body temperature.
- Number of reflow process shall be limited to maximum 2 times only. Cooling process to normal temperature is required between first and second soldering process.

## Recommended soldering pattern (unit: mm)

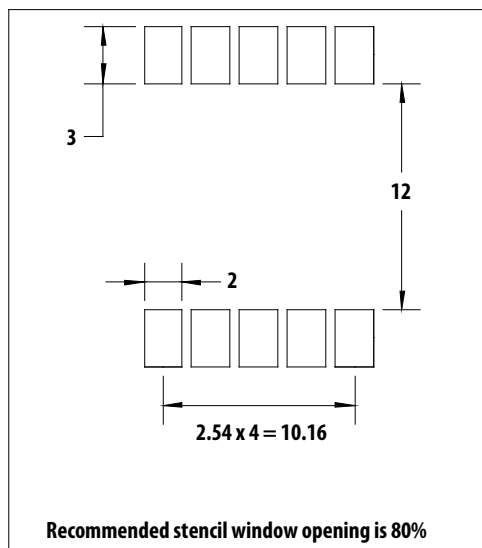

### Tape specification (unit: mm)

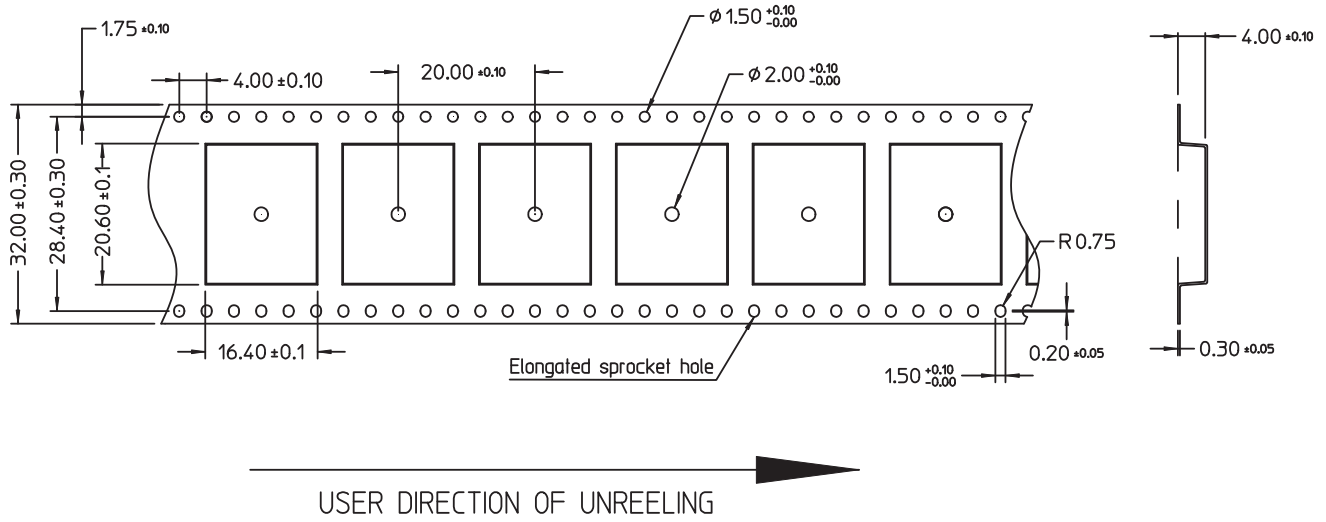

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2015 Avago Technologies. All rights reserved. AV02-0982EN - August 21, 2015

