



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# HDSP-70xE

17.3 mm (0.68 inch) General Purpose  
5x7 Dot Matrix Alphanumeric Displays



## Data Sheet

**HDSP-70xE Series, HDSP-71xE Series**  
**HDSP-70xG Series, HDSP-71xG Series**  
**HDSP-70xA Series, HDSP-71xA Series**

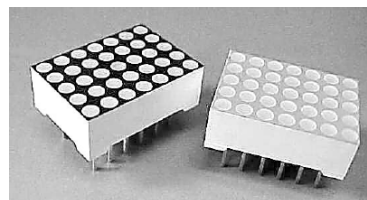

### Description

These displays have a 17.3 mm (0.68 inch) character height and use industry standard size and pin-out. The devices are available in either common row anode or common row cathode configurations. The displays come in either gray or black face paint and are available in a choice of high efficiency red (HER) or green colors or AlGaAs.

### Applications

- Suitable for indoor use
- Not recommended for industrial applications, i.e., operating temperature requirements exceeding 85°C or Below -40°C [1]
- Extreme temperature cycling not recommended [2]

### Features

- 5 x 7 dot matrix font
- Viewable up to 12 meters
- X-Y stackable
- Industry standard pin-out
  - 7.6 mm (0.3 in.) Dual-in-Line (DIP) leads on 2.54 mm (0.1 in.) centers
- Choice of colors
  - Red or Green or AlGaAs
- Choice of face paint colors
  - Gray or black
- Design flexibility
  - Common row anode or common row cathode
- Categorized for luminous intensity
- Green categorized for color




### Devices

HER HDSP-	Green HDSP-	AlGaAs HDSP-	Description
701E	701G	701A	17.3 mm Gray Surface Common Row Anode
703E	703G	703A	17.3 mm Gray Surface Common Row Cathode
711E	711G	711A	17.3 mm Black Surface Common Row Anode
713E	713G	713A	17.3 mm Black Surface Common Row Cathode

#### Notes:

1. For details, please contact your local Avago components sales office or an authorized distributor.


# Package Dimensions

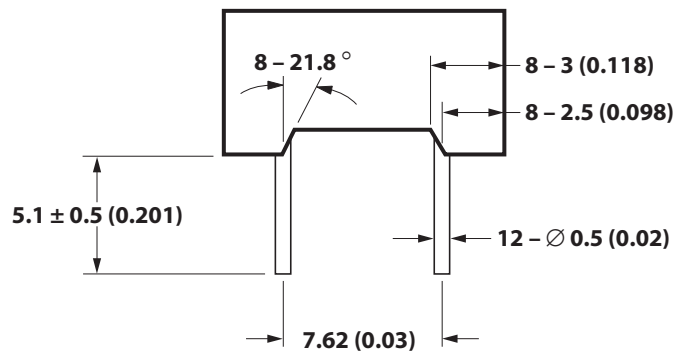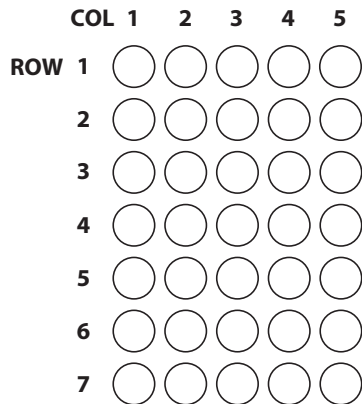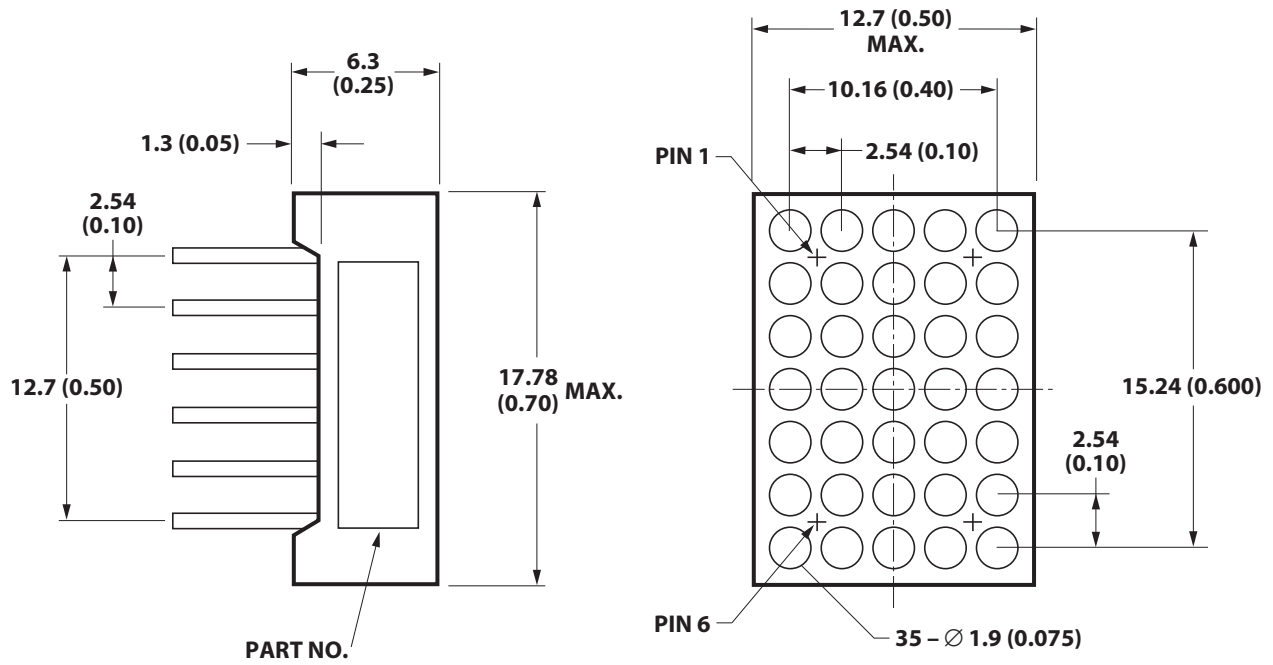

## NOTES:

1. ALL DIMENSIONS IN MILLIMETERS (INCHES).
2. UNLESS OTHERWISE STATED, TOLERANCE IS  $\pm 0.25$  mm (0.010).
3. FOR GREEN ONLY.

## Internal Circuit Diagram

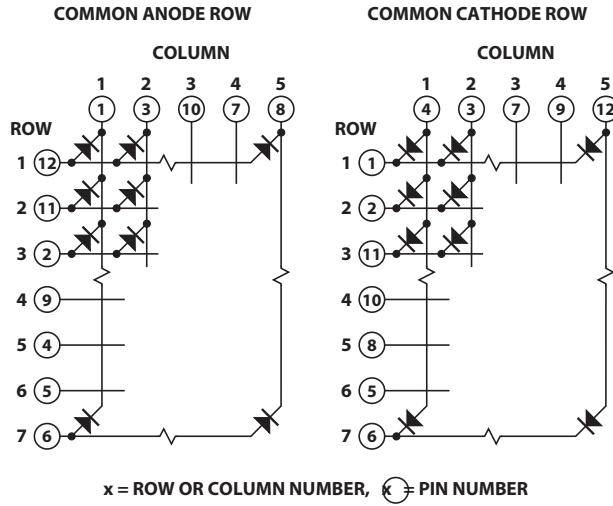

COMMON ROW ANODE		COMMON ROW CATHODE	
PIN	HDSP-701E/711E/ 701G/711G/701A/711A	PIN	HDSP-703E/713E/ 703G/713G/703A/713A
1	COLUMN 1 CATHODE	1	ROW 1 CATHODE
2	ROW 3 ANODE	2	ROW 2 CATHODE
3	COLUMN 2 CATHODE	3	COLUMN 2 ANODE
4	ROW 5 ANODE	4	COLUMN 1 ANODE
5	ROW 6 ANODE	5	ROW 6 CATHODE
6	ROW 7 ANODE	6	ROW 7 CATHODE
7	COLUMN 4 CATHODE	7	COLUMN 3 ANODE
8	COLUMN 5 CATHODE	8	ROW 5 CATHODE
9	ROW 4 ANODE	9	COLUMN 4 ANODE
10	COLUMN 3 CATHODE	10	ROW 4 CATHODE
11	ROW 2 ANODE	11	ROW 3 CATHODE
12	ROW 1 ANODE	12	COLUMN 5 ANODE

## Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	HER HDSP-701E/ 711E/703E/ 713E	AlGaAs HDSP-701A/ 703A/711A/ 713A	Green HDSP-701G/ 711G/703G/ 713G	Units
Average Power per Dot <sup>[1]</sup>	75	75	75	mW
Peak Forward Current per Dot <sup>[1,2]</sup> (1/10 Duty Cycle, 0.1 ms Pulse Width)	90	125	90	mA
Average Forward Current per Dot <sup>[1]</sup>	23	23 <sup>[3]</sup>	15 <sup>[2]</sup>	mA
Reverse Voltage per Dot	Not designed for reverse bias			V
Operating Temperature	-40 to +85	-40 to +85	-40 to +85	°C
Storage Temperature	-40 to +85	-40 to +85	-40 to +85	°C
Wave Soldering Temperature for 3 seconds <sup>[3]</sup> (1.6 mm [0.063 in.] below Body)	250	250	250	°C

### Notes:

- Do not exceed maximum average current per dot.
- Derate above 35°C at 0.2 mA/°C.
- Not recommended to be soldered more than 2 times. Minimum interval between solderings is 15 minutes. Total soldering time not to exceed 5 seconds.

## Optical/Electrical Characteristics at T<sub>A</sub> = 25°C

### High Efficiency Red Devices HDSP-701E/711E/703E/713E

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Luminous Intensity/Dot (Digit Average) <sup>[1]</sup>	I <sub>V</sub>	1.289	2.500		mcd	I <sub>F</sub> = 50 mA, 20% Duty Factor
Peak Wavelength	λ <sub>PEAK</sub>		632		nm	I <sub>F</sub> = 20 mA
Dominant Wavelength <sup>[2]</sup>	λ <sub>d</sub>		622		nm	I <sub>F</sub> = 20 mA
Forward Voltage	V <sub>F</sub>			3.40	V	I <sub>F</sub> = 50 mA
			2.05	2.50		I <sub>F</sub> = 20 mA
		1.60				I <sub>F</sub> = 5 mA
Reverse Voltage <sup>[3]</sup>	V <sub>R</sub>	5			V	I <sub>R</sub> = 100 μA
Luminous Intensity Matching Ratio	I <sub>V-M</sub>			2:1		I <sub>F</sub> = 50 mA, 20% Duty Factor

### Green Devices HDSP-701G/711G/703G/713G

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Luminous Intensity/Dot (Digit Average) <sup>[1]</sup>	I <sub>V</sub>	0.96	2.50		mcd	I <sub>F</sub> = 50 mA, 20% Duty Factor
Peak Wavelength	λ <sub>PEAK</sub>		568		nm	I <sub>F</sub> = 20 mA
Dominant Wavelength <sup>[2]</sup>	λ <sub>d</sub>		573		nm	I <sub>F</sub> = 20 mA
Forward Voltage	V <sub>F</sub>			3.40	V	I <sub>F</sub> = 50 mA
		1.80	2.25	2.60		I <sub>F</sub> = 20 mA
		1.60				I <sub>F</sub> = 5 mA
Reverse Voltage <sup>[3]</sup>	V <sub>R</sub>	5			V	I <sub>R</sub> = 100 μA
Luminous Intensity Matching Ratio	I <sub>V-M</sub>			2:1		I <sub>F</sub> = 50 mA, 20% Duty Factor

### AlGaAs Devices HDSP-701A/711A/703A/713A

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Luminous Intensity/Dot (Digit Average) <sup>[1]</sup>	I <sub>V</sub>	1.55	2.10		mcd	I <sub>F</sub> = 10 mA, 20% Duty Factor
Peak Wavelength	λ <sub>PEAK</sub>		660		nm	I <sub>F</sub> = 20 mA
Dominant Wavelength <sup>[2]</sup>	λ <sub>d</sub>		643		nm	I <sub>F</sub> = 20 mA
Forward Voltage	V <sub>F</sub>		1.8	2.0	V	I <sub>F</sub> = 20 mA
				2.0		I <sub>F</sub> = 10 mA
		1.5				I <sub>F</sub> = 5 mA
Reverse Voltage <sup>[3]</sup>	V <sub>R</sub>	5			V	I <sub>R</sub> = 100 μA
Luminous Intensity Matching Ratio	I <sub>V-M</sub>			1.5:1		I <sub>F</sub> = 10 mA, 20% Duty Factor

#### Notes:

1. The digits are categorized for luminous intensity. The intensity category is designated by a letter on the side of the package.
2. The dominant wavelength, λ<sub>d</sub>, is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
3. Indicates production final test condition only. Long term reverse biasing is not recommended.

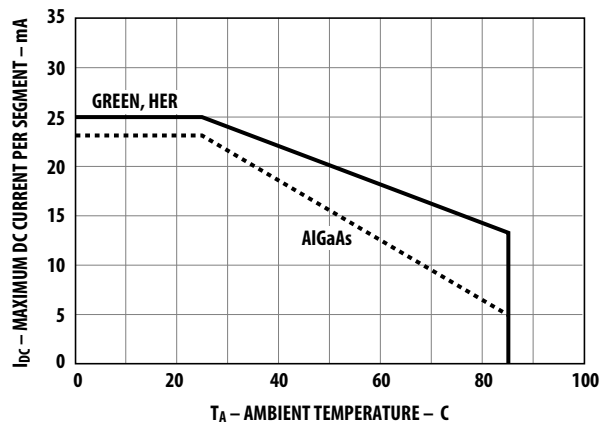


Figure 1. Maximum Allowable Average Current Per Dot vs. Ambient Temperature.

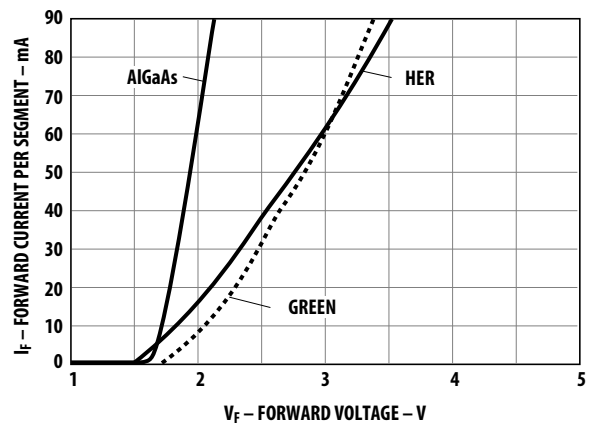


Figure 2. Forward Current vs. Forward Voltage.

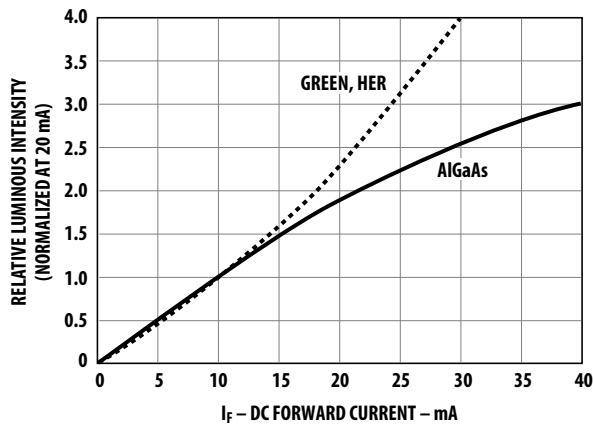


Figure 3. Relative Luminous Intensity vs. DC Forward Current.

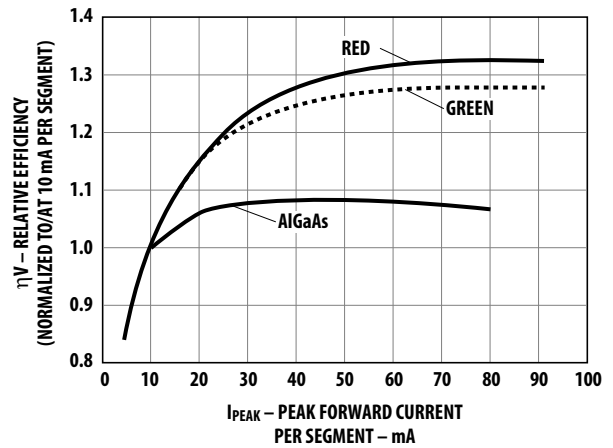


Figure 4. Relative Efficiency (Luminous Intensity Per Unit Current Per Dot) vs. Peak Current Per Dot.

**Intensity Bin Limits<sup>[1]</sup>**  
**(mcd at 50 mA, 20% Duty Factor)**

**High Efficiency Red**

Bin name	Min. <sup>[2]</sup>	Max. <sup>[2]</sup>
E	1.289	1.934
F	1.934	2.900
G	2.900	4.350
H	4.350	6.525

**Green**

Bin name	Min. <sup>[2]</sup>	Max. <sup>[2]</sup>
H	0.96	1.44
I	1.44	2.15
J	2.15	3.23
K	3.23	4.85
L	4.85	7.28

Notes:

- Bin categories are established for classification of products.  
Products may not be available in all bin categories.
- Tolerance for each intensity bin limit is  $\pm 10\%$ .

**Intensity Bin Limits<sup>[1]</sup>**  
**(mcd at 10 mA, 20% Duty Factor)**

**AlGaAs**

Bin name	Min. <sup>[2]</sup>	Max. <sup>[2]</sup>
I	1.55	2.33
J	2.33	3.49

Notes:

- Bin categories are established for classification of products.  
Products may not be available in all bin categories.
- Tolerance for each intensity bin limit is  $\pm 10\%$ .

**Color Bin Limits (Dominant Wavelength)**

Color	Bin	Dominant Wavelength (nm)	
		Min.	Max.
Green	2	573.6	576.5
	3	570.6	573.5
	4	567.6	570.5
	5	564.5	567.5

Note:

All categories are established for classification of products. Products may not be available in all categories. Please contact your local Avago representatives for further clarification/information.

**Contrast Enhancement**

For information on contrast enhancement, please see Application Note 1015.

**Soldering/Cleaning**

Cleaning agents from the ketone family (acetone, methyl ethyl ketone, etc.) and from the chlorinated hydrocarbon family (methylene chloride, trichloro-ethylene, carbon tetrachloride, etc.) are not recommended for cleaning LED parts. All of these various solvents attack or dissolve the encapsulating epoxies used to form the package of plastic LED parts.

For information on soldering LEDs, please refer to Application Note 1027.

**Device Reliability**

For reliability information, please see the reliability datasheet

*17.3 mm General Purpose*

*5 x 7 Dot Matrix Alphanumeric Displays.*

For product information and a complete list of distributors, please go to our website: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005–2015 Avago Technologies. All rights reserved. Obsoletes 5988-8400EN AV02-0450EN - October 5, 2015

