imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








HET200VC

Door mount



HET200VC series

Dimension drawing

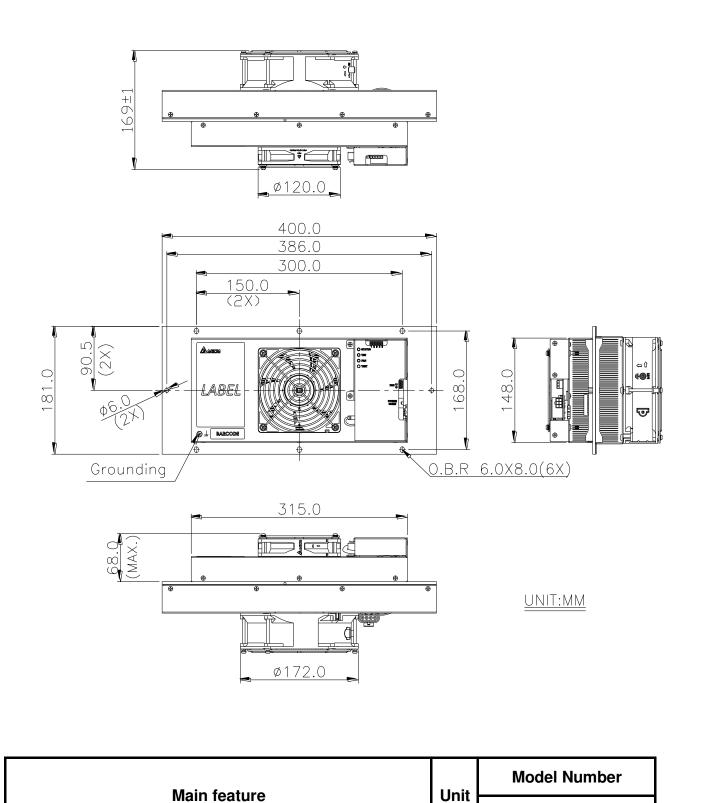

Features

- ♦ IP55 waterproof at external side
- ◆ FAN / TEC / Control fail alarm
- ♦ Clear LED status indicator
- ♦ Standalone temperature control
- ♦ High efficiency and reliable fan modules

	Outline dimension	mm	400 H x 181 W x 169 D
	Weight	Kg	6.0 ± 0.5
	Cooling capacity ($ riangle T$ =0 $^\circ\!\mathbb{C}$)	W	200
	Heating capacity @-40° C	W	225
	Rated voltage	VDC	24 (TYP.)
	Operating voltage range	VDC	20-28
	Actuality Current	Α	12A(TYP.)
	Power Consumption	W	288
	Operating temperature	°C	-40~55
	Internal airflow rate	CEM	85 (TYP.)
l	External airflow rate	CFM	115 (TYP.)
	Acoustic noise at 1M :	dB-A	61.0 dB-A(Typ.)
	(Sound pressure)		65.0(Max.)

* Specifications are subject to change without

notice.

Design

- ♦ High efficiency of cooling & Heating
- ◆ Thermal electric cooling module
- ♦ Rated voltage at 24V
- Built-in controller