



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# 3M™ High Flex Life Cable

.050" 28 AWG Stranded, Halogen Free PO

HF319 Series

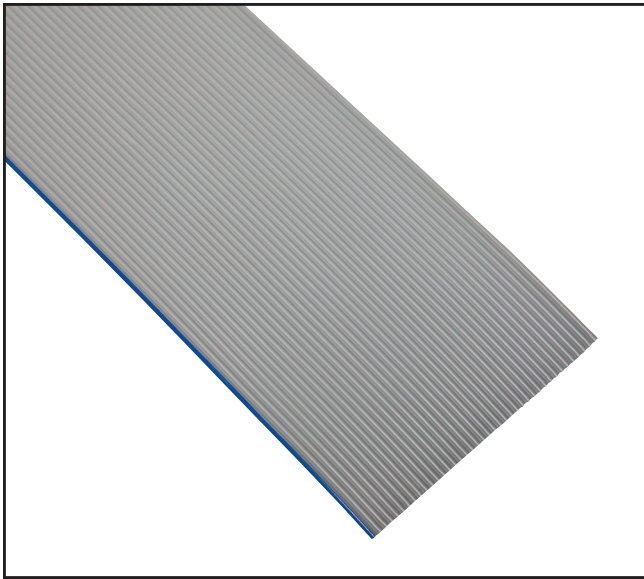

- Low Smoke Zero Halogen (LSZH) Insulation. Advantages of LSZH insulation are the low smoke (IEC 61034-2:2005), and low toxicity of combustion gases (NF X 70-100-2:2006), reducing the risk to firefighters, and reducing the soot and corrosion damage to nearby equipment
- Broad operating temperature range from -40°C to 105°C
- Flex life of 25 million cycles at 3/4 inch radius
- 19 strands of high strength copper allow provide exceptionally long flex life
- 28 AWG wire on .050" spacing permits mass termination to 3M's broad line of .100" IDC connectors
- Zippable for branching or discrete termination
- See the Regulatory Information Appendix (RIA) in the "RoHS compliance" section of [www.3Mconnectors.com](http://www.3Mconnectors.com) for compliance information (RIA E1 & C1 apply)

Date Modified: March 21, 2012

TS-2342-B  
Sheet 1 of 2

## Physical

**Jacket Material:** Halogen Free Polyolefin (PO)

Color: Dark Gray

**Marking:**

Standard: None

28 AWG, 19 x 40 AWG [ 19 x Ø 0.79 ]

**Conductors:** Silver Plated Stranded Copper Alloy (89% Conductivity)

## Electrical

**Voltage Rating:** USA: 300V      Canada: 150V      EU: <50V

**Insulation Resistance:**  $> 1 \times 10^{10} \Omega/10 \text{ ft.}$  [ 3 m ]

<b>Characteristic Impedance:</b>	<b>Unbalanced</b>	<b>Balanced</b>
	104 $\Omega$	167 $\Omega$

<b>Capacitance:</b>	14.1 pF/ft [ 46.3 pF/m ]	8.2 pF/ft [ 26.9 pF/m ]
---------------------	--------------------------	-------------------------

<b>Inductance:</b>	0.15 $\mu\text{H/ft}$ [ 0.49 $\mu\text{H/m}$ ]	0.23 $\mu\text{H/ft}$ [ 0.75 $\mu\text{H/m}$ ]
--------------------	--	--

<b>Propagation Delay:</b>	1.47 ns/ft [ 4.82 ns/m ]	1.37 ns/ft [ 4.49 ns/m ]
---------------------------	--------------------------	--------------------------

<b>Velocity of Propagation:</b>	70%	74%
---------------------------------	-----	-----

Note: Unbalanced is measured between ground-signal-ground conductors. Balanced is measured between conductors within a pair.

## Environmental

**Temperature Rating:** -40°C to +105°C

**Flammability Rating:** USA: Horizontal

Halogen Free is defined as both 1) no halogen compounds that are intentionally added to the product or used in the manufacturing process for the product and 2) any impurities present are less than 900 ppm bromine, less than 900 ppm chlorine and/or less than 1500ppm total bromine and chlorine. The latter are the levels set forth in certain industry standards for printed circuit boards, such as the International Electrotechnical Commission (IEC) 61249-2-21 standard. This information represents 3M's knowledge and belief which may be based in whole or in part on information provided by 3rd party suppliers to 3M.

UL File No.: E42769, Style No.: 21682

# 3M™ High Flex Life Cable

.050" 28 AWG Stranded, Halogen Free PO

HF319 Series



Inch  
[mm]


Tolerance Unless Noted			
	.0	.00	.000
Inch	±.1	±.01	±.005

[ ] Dimensions for Reference Only

Radius	Minimum Flex Cycles
1/2"	9 million
3/4"	25 million

Note: Represents minimum tested rolling flex cycles at date of publication. Additional testing is ongoing. Cable construction and material is similar to 3319 series cable which is rated to 100 million cycles at 7/8" radius. See TS-0732. Contact 3M for the most up-to-date test information.

Number of Conductors	3M Part Number	Dimension A ± .03"	Dimension B (See Note 2)
06	HF319/06	0.300 +/- .010 [11.43]	0.250 +/- .007 [10.16]
09	HF319/09	0.450 ± .010 [11.43]	0.400 ± .007 [10.16]
10	HF319/10	0.500 ± .010 [12.70]	0.450 ± .007 [11.43]
14	HF319/14	0.700 ± .010 [17.78]	0.650 ± .007 [16.51]
15	HF319/15	0.750 ± .010 [19.05]	0.700 ± .007 [17.78]
16	HF319/16	0.800 ± .015 [20.32]	0.750 ± .011 [19.05]
20	HF319/20	1.000 ± .015 [25.40]	0.950 ± .011 [24.13]
24	HF319/24	1.200 ± .015 [30.48]	1.150 ± .011 [29.21]
25	HF319/25	1.250 ± .015 [31.75]	1.200 ± .011 [30.48]
26	HF319/26	1.300 ± .015 [33.02]	1.250 ± .011 [31.75]
30	HF319/30	1.500 ± .020 [38.10]	1.450 ± .015 [36.83]
34	HF319/34	1.700 ± .020 [43.18]	1.650 ± .015 [41.91]
36	HF319/36	1.800 ± .020 [45.72]	1.750 ± .015 [44.45]
37	HF319/37	1.850 ± .020 [46.99]	1.800 ± .015 [45.72]
40	HF319/40	2.000 ± .020 [50.80]	1.950 ± .015 [49.53]
50	HF319/50	2.500 ± .020 [63.50]	2.450 ± .015 [62.23]
60	HF319/60	3.000 ± .020 [76.20]	2.950 ± .015 [74.93]
64	HF319/64	3.200 ± .020 [81.28]	3.150 ± .015 [80.01]

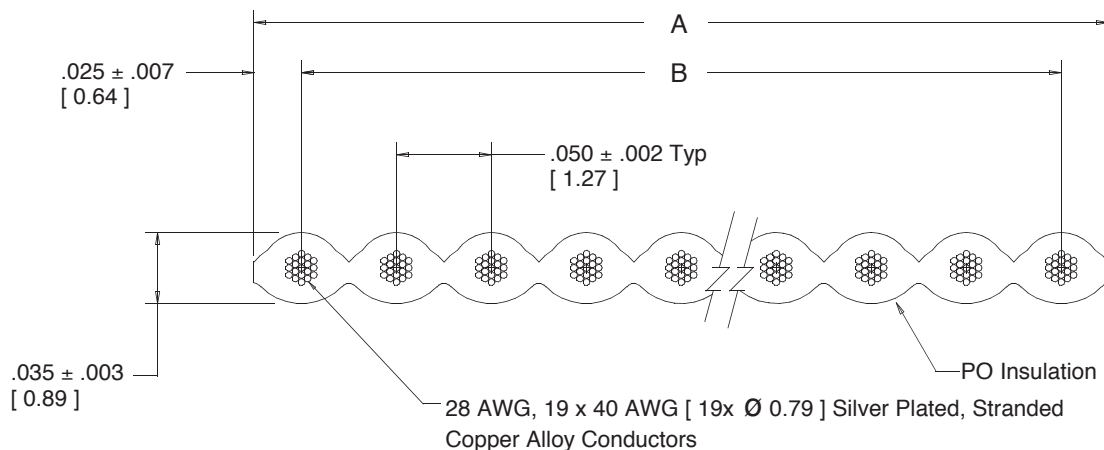

**Notes:**

- Blue marking on one edge of cable designates wire #1.

## Ordering Information

**HF319/XX XX**

Blank = Standard  
C = Canadian Certified Version

Number of Conductors  
(See Table)

Blank = Standard  
SF = Splice Free

**Note:**

Available in standard 100 ft and 300 ft rolls, please specify when ordering. Contact 3M for availability of additional conductor counts and/or custom roll lengths.

TS-2342-B  
Sheet 2 of 2

**Important Notice**

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

**Warranty; Limited Remedy; Limited Liability.**

This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**

**3M Electronics Solutions Division**

6801 River Place Blvd.  
Austin, TX 78726-9000  
U.S.A.  
1-800-225-5373  
[www.3Mconnectors.com](http://www.3Mconnectors.com)

3M is a trademark of 3M Company.

Please recycle. Printed in USA.  
© 3M 2012. All rights reserved.  
RIA-2217B-E