



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## High Current Low Profile Surface Mount Inductors

### Model HM69

#### Features and Benefits

- Operating Temperature Range -40°C to +125°C
- Temperature Rise, Maximum 40°C
- Operating Frequency Up to 3MHz
- RoHS Compliant



### Specifications

| Part Number   | Inductance<br>100kHz, 0.1V |                              |      | DCR <sup>(1)</sup><br>(mΩ) |      | I <sub>rated</sub> <sup>(2)</sup><br>@ 25°C<br>(Adc) | Heating<br>Current <sup>(3)</sup><br>(A) | Core Loss <sup>(4)</sup><br>Factor |         |
|---------------|----------------------------|------------------------------|------|----------------------------|------|--|--|------------------------------------|---------|
|               | @ 0 Adc<br>(nH ± 20%)      | @ I <sub>rated</sub><br>(nH) |      | Min.                       | Typ. |  |  | K1                                 | K2      |
|               | Typ.                       | Min.                         | Typ. |                            |      |  |  |                                    |         |
| HM69-10R025LF | 25                         | 18                           | 25   | 0.27                       | 0.33 | 42   | 22                                       | 3.847E-14                          | 59.444  |
| HM69-20R050LF | 50                         | 28                           | 36   | 0.20                       | 0.24 | 70   | 35                                       | 1.074E-13                          | 50.117  |
| HM69-30R070LF | 70                         | 50                           | 67   | 0.40                       | 0.48 | 46   | 25                                       | 1.074E-13                          | 70.164  |
| HM69-40R10LF  | 100                        | 60                           | 75   | 0.31                       | 0.39 | 28   | 25                                       | 7.124E-14                          | 156.891 |
| HM69-50R10LF  | 100                        | 72                           | 95   | 0.40                       | 0.48 | 29   | 24                                       | 8.733E-14                          | 127.990 |
| HM69-50R15LF  | 150                        | 96                           | 120  | 0.40                       | 0.48 | 18   | 24                                       | 8.733E-14                          | 191.986 |
| HM69-55R10LF  | 100                        | 64                           | 80   | 0.45                       | 0.56 | 45   | 25                                       | 1.337E-13                          | 96.541  |
| HM69-55R20LF  | 200                        | 140                          | 175  | 0.45                       | 0.56 | 21   | 25                                       | 1.337E-13                          | 160.902 |
| HM69-60R10LF  | 100                        | 69                           | 87   | 0.42                       | 0.50 | 68   | 31                                       | 2.311E-13                          | 52.336  |
| HM69-60R15LF  | 150                        | 104                          | 130  | 0.42                       | 0.50 | 48   | 31                                       | 2.311E-13                          | 78.503  |
| HM69-60R20LF  | 200                        | 144                          | 180  | 0.42                       | 0.50 | 31   | 31                                       | 2.311E-13                          | 104.671 |
| HM69-70R30LF  | 300                        | 200                          | 250  | 0.17                       | 0.20 | 37   | 70                                       | 6.784E-13                          | 98.921  |
| HM69-75R20LF  | 200                        | 150                          | 175  | 0.40                       | 0.50 | 20   | 40                                       | 3.559E-13                          | 134.203 |
| HM69-80R30LF  | 300                        | 216                          | 285  | 0.17                       | 0.25 | 40   | 76                                       | 9.107E-13                          | 72.674  |

Notes: (1) DC resistance is measured at 25°C.

(2) The rated current (I<sub>rated</sub>) is the current at which the inductance will be decreased by 20% from its initial (zero DC) value.

(3) The heating current is the DC current, which causes the component temperature to increase by approximately 40°C. This current is determined by soldering the component on a typical application PCB, and then applying the device for 30 minutes.

(4) Core Loss approximation is based on published core data:

$$\text{Core Loss} = K1 * (f)^{1.77} * (K2\Delta I)^{2.21}$$

Where:

core loss in watt

f = switching frequency in kHz

K1 and K2 = core loss factor

ΔI = delta I across the component in Amp.

K2ΔI = one half of the peak to peak flux density across the component in Gauss

### Packaging

| Embossed Tape & Reel |  |
|----------------------|--|
| Standard             | Reel: Diameter: = 13" (330.2mm)        |
|                      | Capacity: Case size 10,40 = 1000 Units |
|                      | Case size 20,30,60 = 800 Units         |
|                      | Case size 50,55,75 = 500 Units         |
|                      | Case size 70,80 = 350 Units            |

#### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.

All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


**Model HM69**

## Ordering Information

Model Series HM69 - 50 R10 LF TR13  
 Case Size : \_\_\_\_\_  
 Inductance Code: \_\_\_\_\_  
 First 2 digits are significant.  
 Last digit denotes the number of trailing zeros.  
 For values below 10µH, "R" denotes the decimal point.


TR - Tape & Reel Packing  
 13 - 13" reel  
 Lead-Free

## Outline Dimensions (mm)

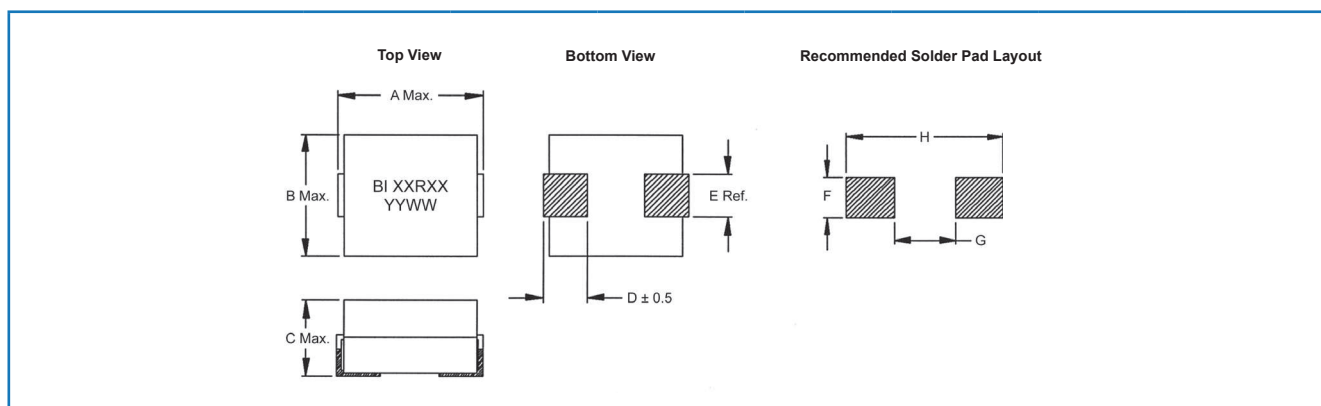

| Case Size | A    | B    | C    | D    | E    | F    | G    | H    |
|-----------|------|------|------|------|------|------|------|------|
| 10        | 6.00 | 5.00 | 3.00 | 1.00 | 1.50 | 1.60 | 2.00 | 5.80 |
| 20        | 7.50 | 6.50 | 5.00 | 1.50 | 2.95 | 3.00 | 2.50 | 7.50 |
| 30        | 7.00 | 7.00 | 5.00 | 1.50 | 2.3  | 2.50 | 2.50 | 7.50 |
| 40        | 7.01 | 6.35 | 3.30 | 1.50 | 2.85 | 3.20 | 2.50 | 7.50 |
| 50        | 8.60 | 6.30 | 3.30 | 1.50 | 2.85 | 3.20 | 2.50 | 9.00 |
| 55        | 8.60 | 6.30 | 4.80 | 1.50 | 2.85 | 3.20 | 2.50 | 9.00 |
| 60        | 10.2 | 7.00 | 5.10 | 1.50 | 2.50 | 2.80 | 5.50 | 10.5 |
| 70        | 13.5 | 13.0 | 6.80 | 3.00 | 5.00 | 5.30 | 5.50 | 13.5 |
| 75        | 13.5 | 13.0 | 3.50 | 2.00 | 2.50 | 3.20 | 7.00 | 13.5 |
| 80        | 13.8 | 13.0 | 8.20 | 2.00 | 5.00 | 5.30 | 5.50 | 13.8 |

## Electrical Characteristics @ 25°C



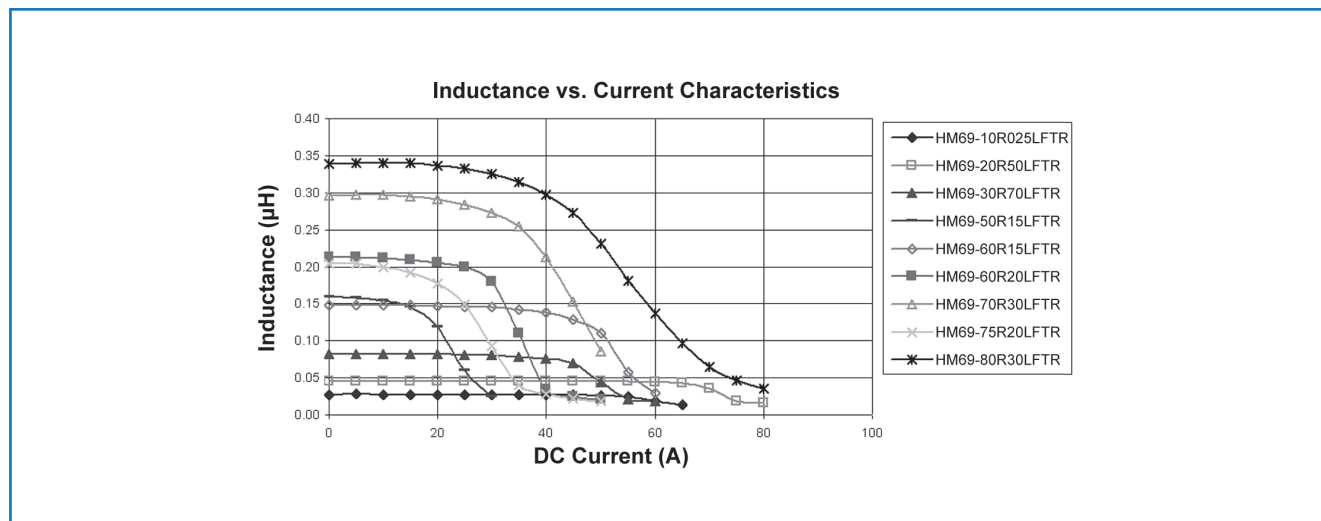


**General Note**

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Model HM69

Electrical Characteristics @ 25°C (Cont'd)

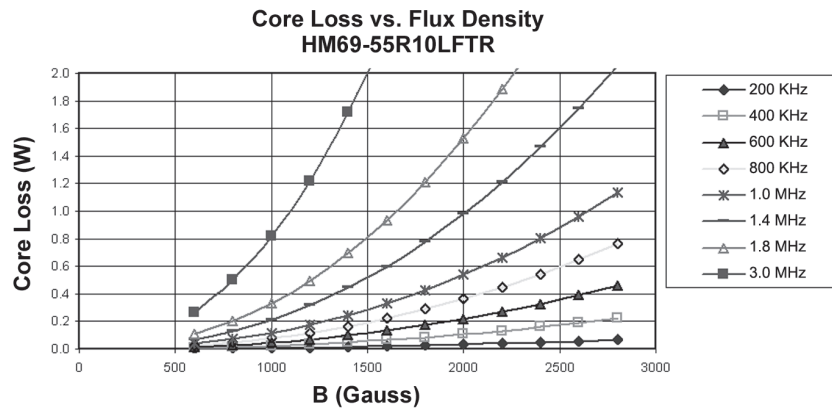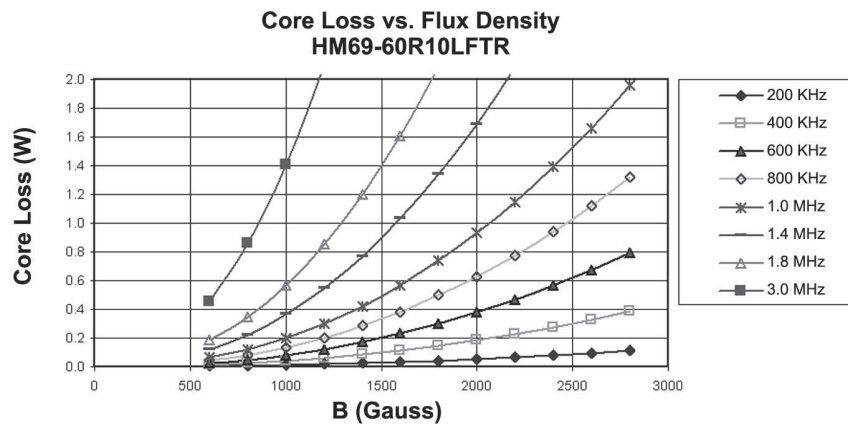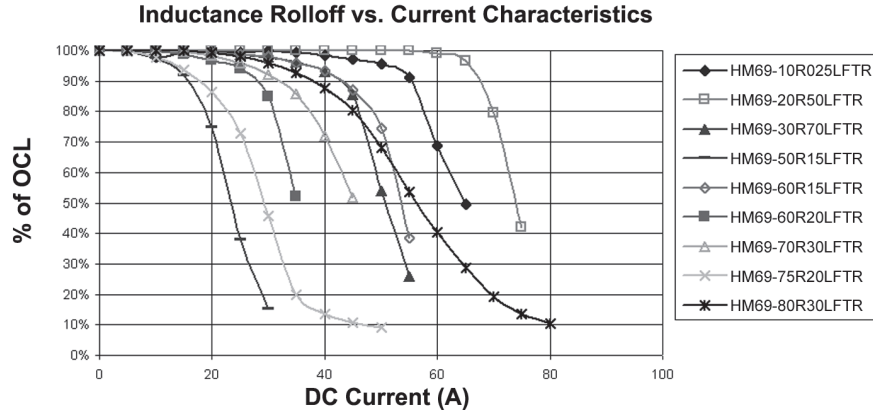

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.